


SOCKET PINS for 0.042" & 0.055" Dia. HOLES

VECTOR PART SERIES : R30, R31, R32, R50, R51, R52, R53

0.042" Dia. Holes : R32 Series

Low profile wire-wrap socket pins
 Pressfit mounting with 3 Level wire wrap on 0.025" square posts
 Four-finger contacts, tapered sockets for easy insertion
 Accepts 0.015 - 0.025 diameter leads
 Gold-plated contact surfaces (30 micro inch Gold over Nickel)
 Gold finish shell (10 micro inch Gold over Nickel)
 Male pin depth : 0.13"
 Use **P158** Insertion Tool with **D9** Die Point.


Ordering Table	Part No.	Pkg. Qty.
	R32/C	100
	R32/M	1000

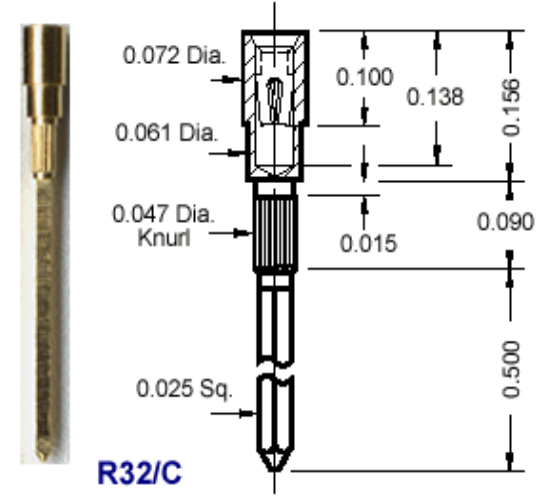

0.055" Dia. Holes : R31 Series

Low profile wire-wrap socket pins
 Pressfit mounting with 3 Level wire wrap on 0.025" square posts
 Four-finger contacts, tapered sockets for easy insertion
 Gold-plated contact surfaces (30 micro inch Gold over Nickel)
 Gold finish shell (10 micro inch Gold over Nickel)
 Male pin depth : 0.17"
 Use **P158** Insertion Tool with **D10** Die Point.


Ordering Table	Part No.	Pkg. Qty.
	R31/C	100
	R31/M	1000

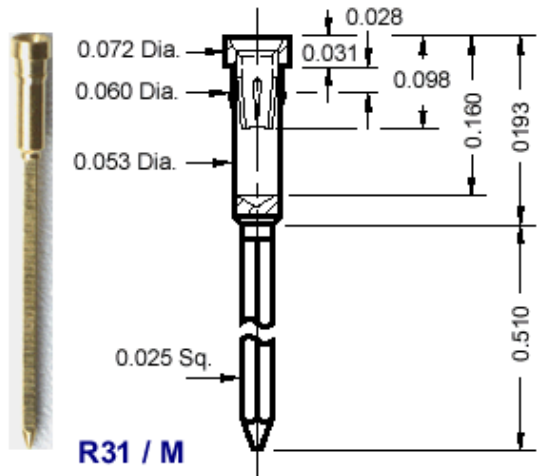

0.055" Dia. Holes : R30 Series

Low profile, pressfit pins for hand or dip solder applications
 Solder post extends 0.19 below and 0.030 above board surface
 Four-finger contacts, tapered sockets for easy insertion
 Gold-plated contact surfaces (30 micro inch Gold over Nickel)
 Gold finish shell (10 micro inch Gold over Nickel)
 Male pin depth : 0.17"
 Use **P158** Insertion Tool with **D10** Die Point.

Ordering Table	Part No.	Pkg. Qty.
	R30/C	100
	R30/M	1000

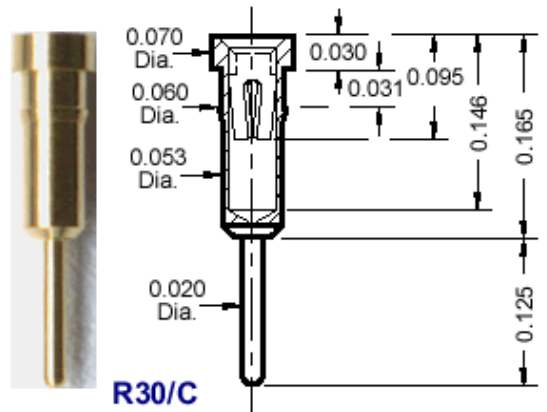

0.055" Dia. Holes : R52 & R53 Series

Low profile wire-wrap socket pins

Gold-plated contact surfaces (30 micro inch Gold over Nickel)

Tin/Lead finish shell (200 micro inch Tin/Lead over Nickel)


3 Level wire wrap on 0.025" square posts

Use P158 Insertion Tool with D10 Die Point.

R52 : Four figure contacts, 3 level wire wrap on 0.025" square posts

R53 : Six figure contacts, 3 level wire wrap on 0.025" square posts

Ordering Table	Part No.	Pkg. Qty.
	R52/C	100
	R52/M	1000
	R53/C	100
	R53/M	1000

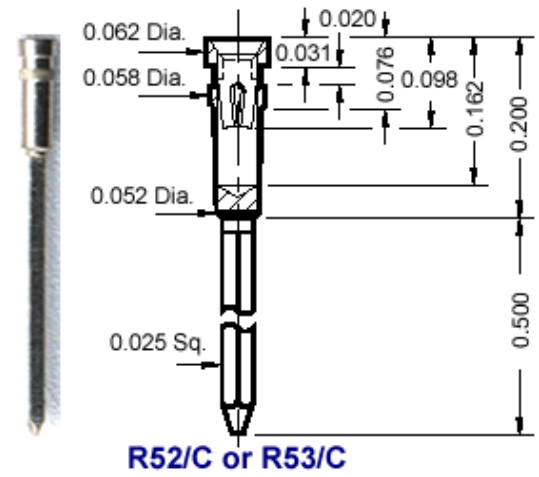

0.055" Dia. Holes : R50 & R51 Series

Low profile wire-wrap socket pins

Gold-plated contact surfaces (30 micro inch Gold over Nickel)

Tin/Lead finish shell (200 micro inch Tin/Lead over Nickel)


2 Level wire wrap on 0.025" square posts

Use P158 Insertion Tool with D10 Die Point.

R52 : Four figure contacts, 2 level wire wrap on 0.025" square posts

R53 : Six figure contacts, 2 level wire wrap on 0.025" square posts

Ordering Table	Part No.	Pkg. Qty.
	R50/C	100
	R50/M	1000
	R51/C	100
	R51/M	1000

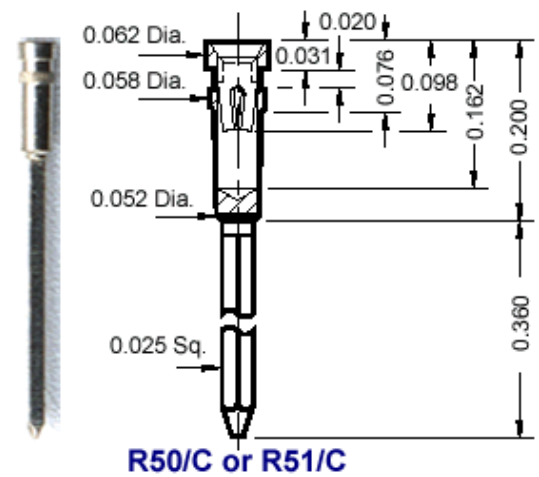

email us your requirements : inquire@vectorelect.com

11115 Vanowen St., North Hollywood, CA 91605, USA

Tel.: (818) 985 8208, (800) 423 5659; Fax : (818) 985 7708

Circbord®, Vectorbord® and VectorPak® are registered trademarks of Vector Electronics & Technology, Inc.
CompactPCI® is a registered trademark of PCIMG. © 2001 Vector Electronics & Technology, Inc. - All Rights Reserved