

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► **Extract from the online catalog**

Battery module, 24 V DC, 7.2 Ah



Order No.	2866352
Ord designation	QUINT-BAT/24DC/7.2AH
EAN	4017918959753
Pack	1 Pcs.
Customs tariff	85072098
Weight/Piece	7.41 KG
Catalog page information	Page 495 (IF-2007)

► **Technical data**

Input data

Nominal input voltage	24 V DC
Current consumption	1.8 A (charging process)
Buffer period	(refer to the selection table)

Output data

Nominal output voltage	24 V DC
Output current	Max. 50 A
Connection in parallel	Yes, for increasing the buffer period
Connection in series	No

QUINT-BAT/24DC/7.2AH



Output fuse


2x 25 A

General data

Width	164 mm
Height	156 mm
Depth	123 mm
Weight	6 kg
Memory medium	battery 7.2 Ah
Degree of protection	IP20
Class of protection	III
Ambient temperature (operation)	0 °C ... 40 °C
Ambient temperature (storage/transport)	0 °C ... 40 °C

▶ Drawings

Block diagram

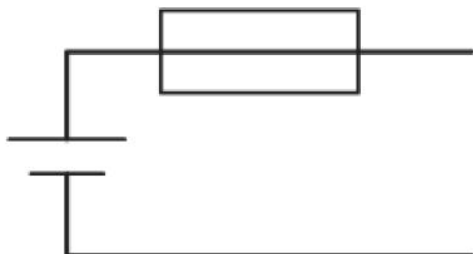

► Accessories

Item	Designation	Description
General		
2866857	QUINT-ADAPTER/4	Assembly adapter for QUINT-BAT/24DC... on 35mm rail

► **Address**

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;