



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 60MHz SMD 13.3x6.5mm

TST Parts No.: TB0636A

Customer Parts No.: _____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: Andy Yu *Andy Yu*

Approval by: Francis Chen *Francis Chen*

Date: 2008/7/15



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 60 MHz SMD 13.3mmX6.5mm

MODEL NO.: TB0636A

REV.1.0

A. MAXIMUM RATING:

1. Operating Temperature: -40°C to +85°C
2. Storage Temperature: -40°C to +85°C
3. Input Power Level: 10 dBm
4. Maximum DC Voltage: 10V

RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

1. Ambient Temperature: 25 °C

Item	Unit	Min.	Type.	Max.
Center frequency, Fc	MHz	-	60.0	-
Insertion Loss, IL	dB	-	15.0	18.5
1 dB Bandwidth	MHz	20.0	21.7	-
3 dB Bandwidth	MHz	-	22.5	-
25 dB Bandwidth	MHz		25.5	30.0
40 dB Bandwidth	MHz		26.8	31.0
Pass band Ripple Fc±10.0MHz	P-P dB	-	0.6	1.2
VSWR Fc±10.0MHz	P-P dB		6.5	7.0
Group delay Variation Fc±10MHz	P-P nsec		30	100
Triple Transit Suppression	dB	40	43	
Power Handling	dBm	10		
Temp Coefficient	ppm/K	-	-23	-

D. FREQUENCY CHARACTERISTICS :

1.S21 Response: (span : 70MHz)

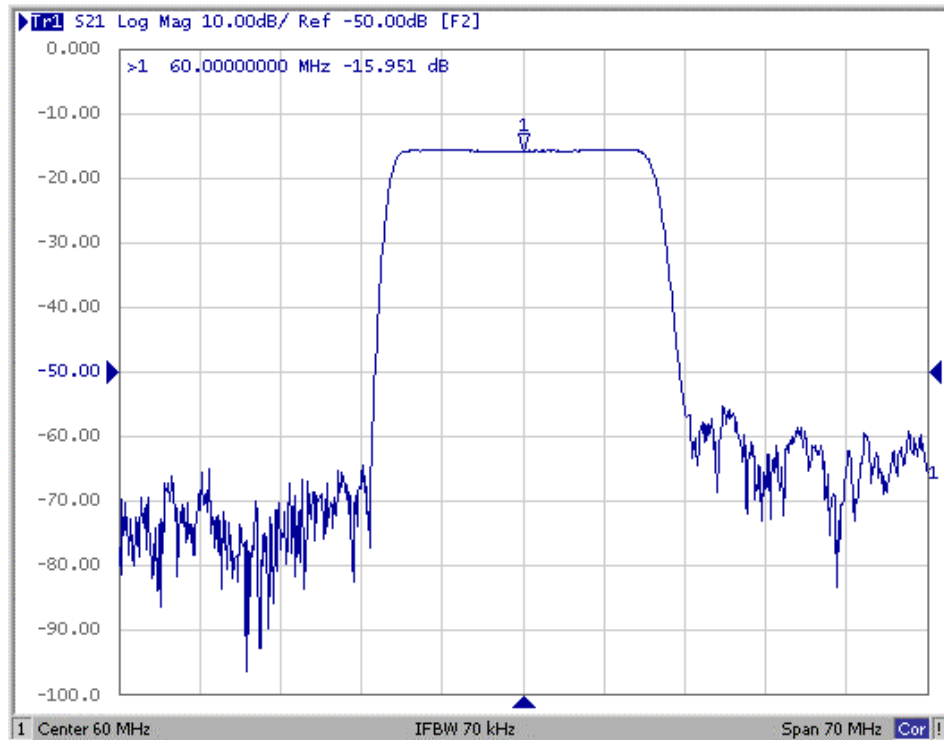


Fig1. Horizontal: 7MHz/Div Vertical: 10dB/Div

2. Group-Delay Ripple: (span : 30MHz)



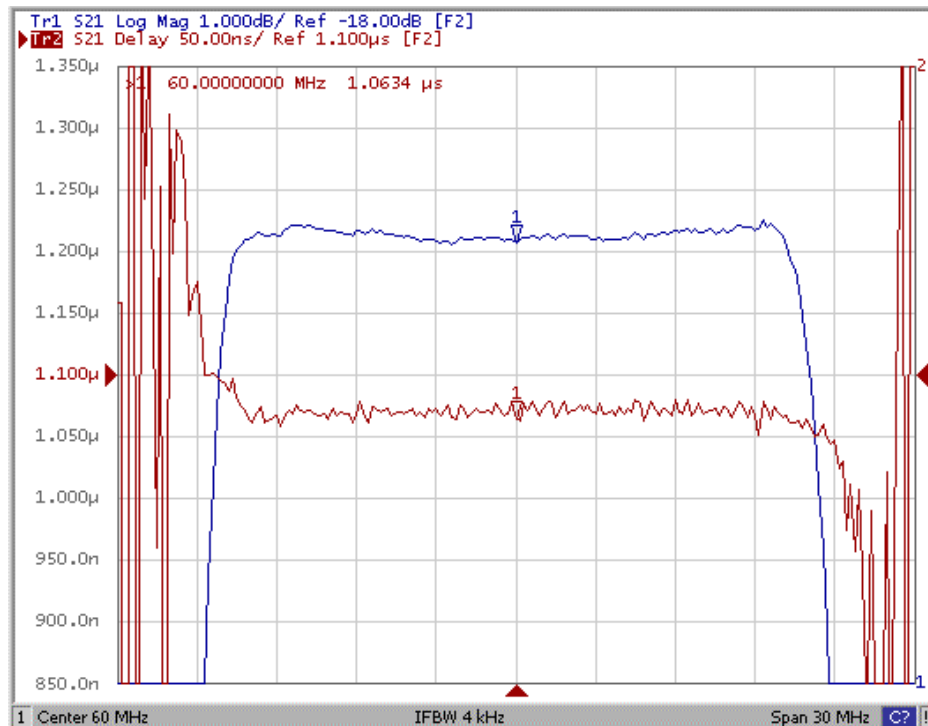


Fig2. Horizontal: 3.0MHz/Div Vertical: 50nec/Div


3. S11 Smith Chart: (span : 70MHz)

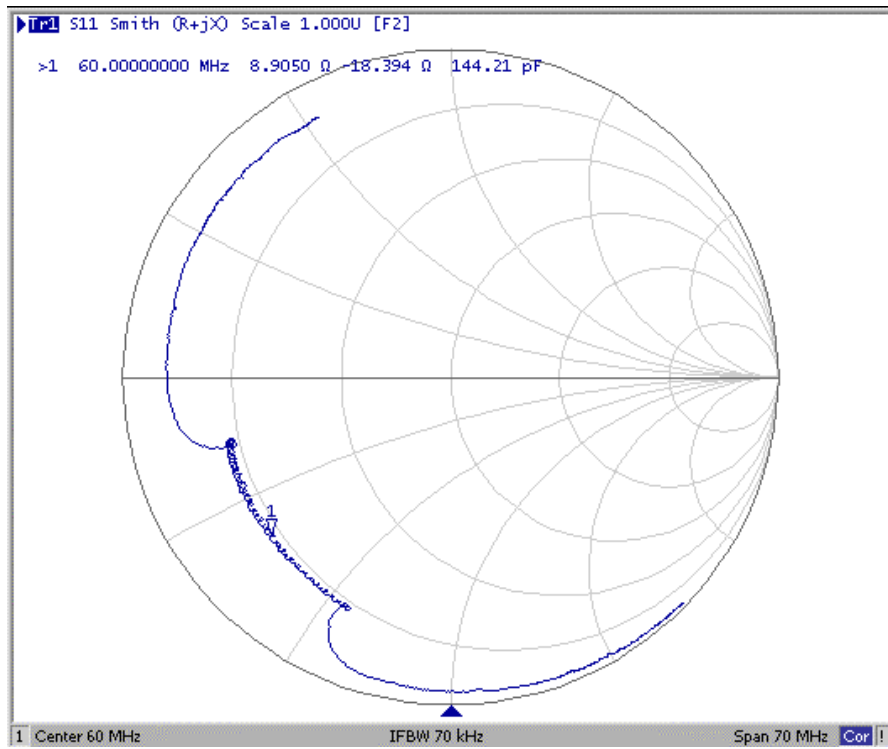


3. S22 Smith Chart (span : 70MHz)

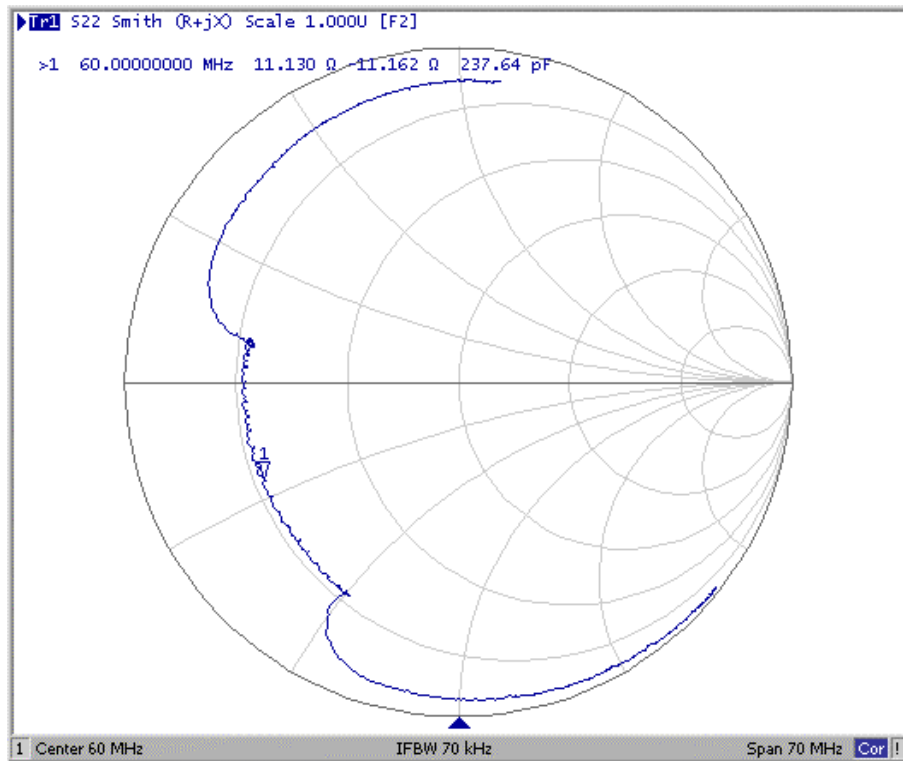

E. MEASUREMENT CIRCUIT

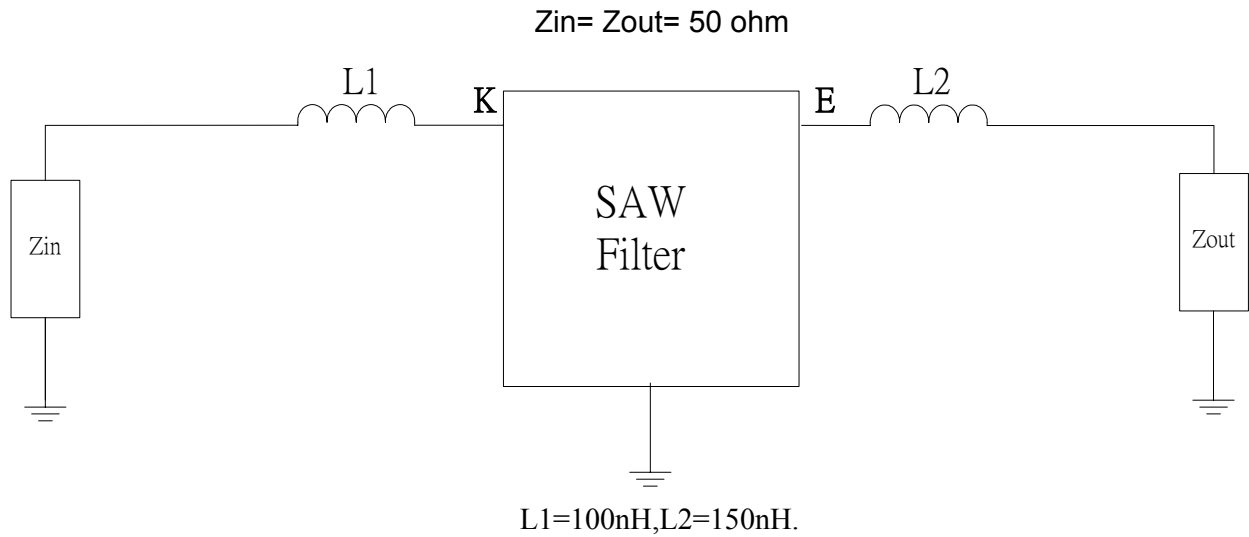

F. OUTLINE DRAWING:

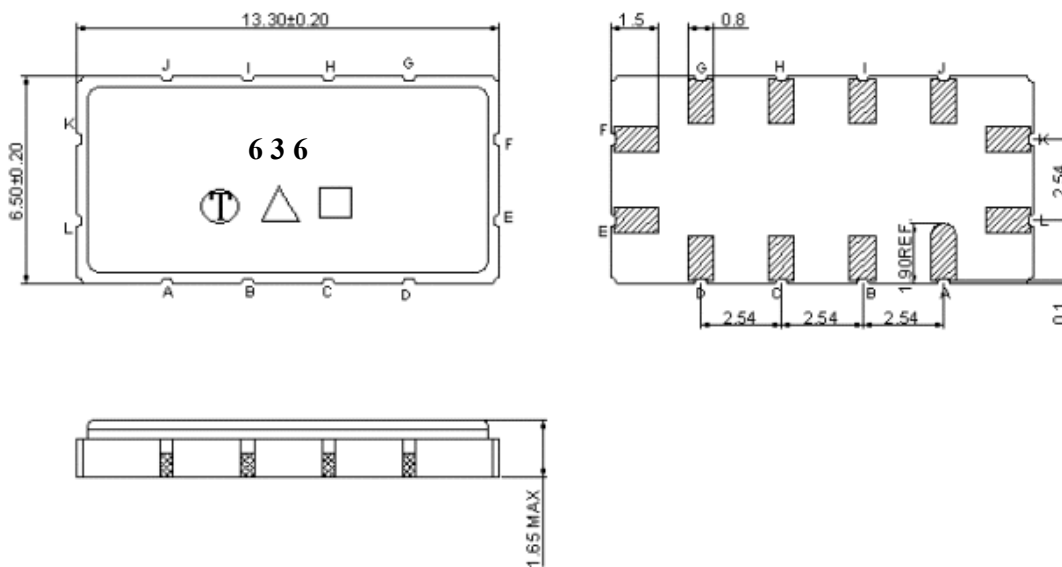

Pin K: RF input

Pin E: RF output

Pin A, B, C, D, G, H, I, L, F J: To be Ground


□ : Week Code (Follow the table from planner each year)

Unit : mm

△ : Product / Year Code

Year	2005 2009	2006 2010	2007 2011	2008 2012
Product Code	B	b	<u>B</u>	<u>b</u>


G. PCB Footprint

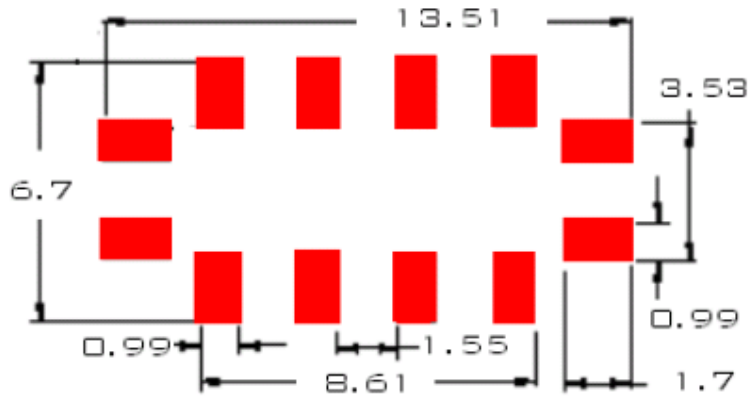

Unit: mm


H. PACKING:

1. REEL DIMENSION

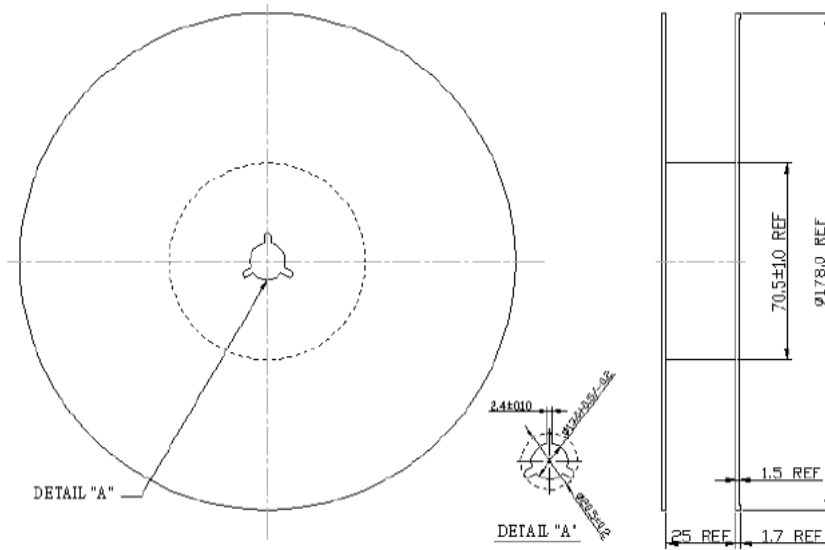

Unit: mm

2. TAPE DIMENSION

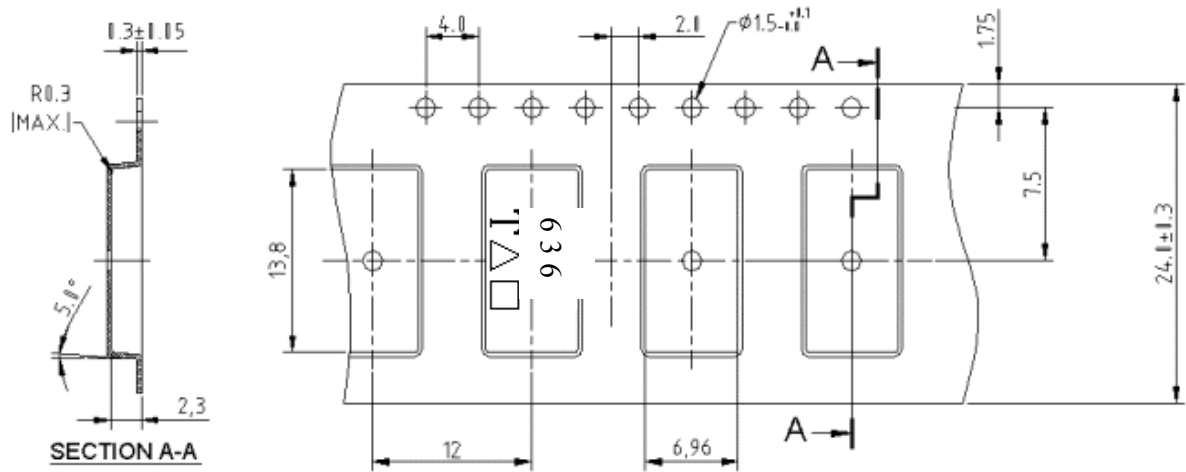

Unit: mm

I. RECOMMENDED REFLOW PROFILE_:

