

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	MIN	APD
		M		REVISED PER ECO-09-001588	03JUN2009		CJV/CWR

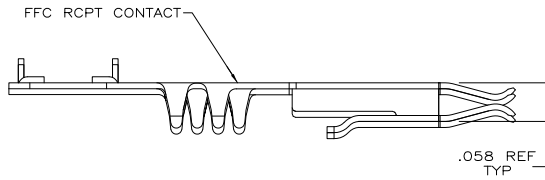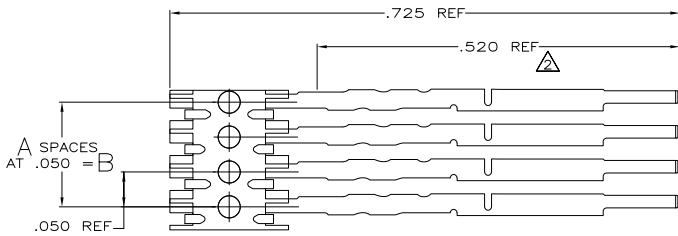

- 1. NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, WITH GOLD .000030 MIN THK ON MATING AREA, AND BRIGHT TIN/LEAD .000100 MIN THK ON CRIMP AREA,
 -OR-
 NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, GOLD FLASH OVER PALLADIUM-NICKEL, .000030 MIN TOTAL THK ON MATING AREA AND BRIGHT TIN/LEAD .000100 MIN THK ON CRIMP AREA.
- 2. LENGTH AFTER BEING CUT-OFF FROM CARRIER STRIP.
- 3. TO BE TERMINATED TO FLEXIBLE FLAT CONDUCTOR CABLE IN APPLICATOR 818973-1.
- 4. MIN MATING POST LENGTH .125.
- 5. NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, WITH GOLD .000030 MIN THK ON MATING AREA, AND GOLD FLASH ON CRIMP AREA,
 -OR-
 NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, GOLD FLASH OVER PALLADIUM-NICKEL, .000030 MIN TOTAL THK ON MATING AREA AND GOLD FLASH ON CRIMP AREA.

OBSOLETE	487547-1	1.450	29	30	4-487558-8
OBSOLETE	487547-1	2.450	49	50	4-487558-7
OBSOLETE	487547-1	2.200	44	45	4-487558-2
OBSOLETE	487547-1	1.950	39	40	3-487558-7
OBSOLETE	487547-1	1.750	35	36	3-487558-3
OBSOLETE	487547-1	1.650	33	34	3-487558-1
OBSOLETE	487547-1	1.450	29	30	2-487558-7
OBSOLETE	487547-1	1.200	24	25	2-487558-2
OBSOLETE	487547-1	1.050	21	22	1-487558-9
OBSOLETE	487547-1	.950	19	20	1-487558-7
OBSOLETE	487547-1	.800	16	17	1-487558-4
OBSOLETE	487547-1	.700	14	15	1-487558-2
OBSOLETE	487547-1	.600	12	13	1-487558-0
OBSOLETE	487547-1	.550	11	12	487558-9
OBSOLETE	487547-1	.500	10	11	487558-8
OBSOLETE	487547-1	.450	9	10	487558-7
OBSOLETE	487547-1	.350	7	8	487558-5
SUPSD BY	487547-1	.300	6	7	487558-4
OBSOLETE	487547-1	.250	5	6	487558-3
OBSOLETE	487547-1	.200	4	5	487558-2
OBSOLETE	487547-1	.150	3	4	487558-1

RCPT CONTACT PART NO (REF)		FINISH	B	A	NO OF POSN	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DR	10-28-85	Tyco Electronics Corporation		
D. DOLLYHIGH		OK	10-28-85	Harrisburg, PA 17105-3608		
D. S. WORTHINGTON		NAME		CONTACT, RCPT, COMB, .050 C/L, FFC		
DIMENSIONS: INCHES		PRODUCT SPEC	108-16022	RESTRICTED TO		
MATERIAL: PHOSPHOR BRONZE		APPLICATION SPEC	114-16008	SIZE	CAGE CODE	DRAWING NO
FINISH: SEE TABLE		RIGHT		A2	00779	C=487558
		CUSTOMER DRAWING		SCALE	4:1	SHEET 1 of 1 REV M

AMP 1471-9 REV 31MM2000

487558

A