

# Memory Module Specification

## KVR800D2N6/2G

### 2GB 256M x 64-Bit DDR2-800 CL6 240-Pin DIMM

#### **DESCRIPTION:**

This document describes ValueRAM's 256M x 64-bit 2GB (2048MB) DDR2-800 CL6 SDRAM (Synchronous **DRAM**) memory module. The components on this module include sixteen 128M x 8-bit DDR2-800 SDRAM in FBGA packages. This 240-pin DIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:

### **FEATURES:**

☑ Clock Cycle Time (tCK) CL=6 2.5ns (min.) / 8ns (max.)

Row Cycle Time (tRC) 60ns (min.)

Refresh to Active/Refresh Command Time (tRFC) 127.5ns

☑ Row Active Time (tRAS) 45ns (min.) / 70,000ns (max.)

Single Power Supply of +1.8V (+/-.1V)

✓ Power 2.016 W (operating)

☑ UL Rating 94 V - 0

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

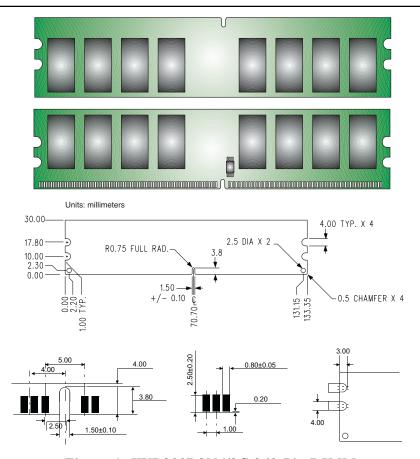


Figure 1: KVR800D2N6/2G 240-Pin DIMM