
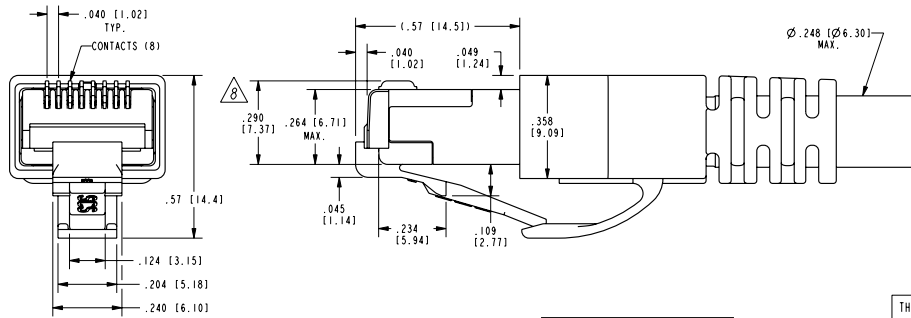
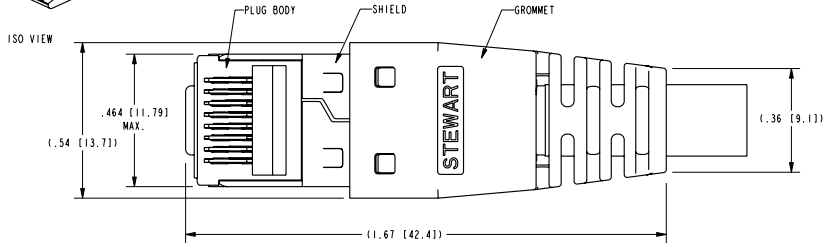



| DATE | REV. | ECN | APP'D BY |
|---------|------|------|----------|
| 1-19-06 | B3 | 7450 | TRM |
| 4-25-06 | B4 | 7598 | TRM |
| | | | |

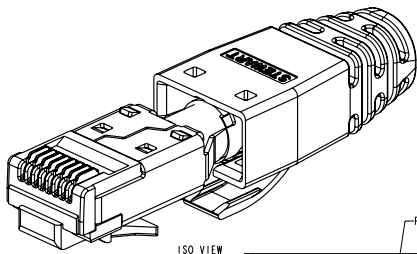


NOTES:

1. PLUG KIT CONSISTS OF:
PRE-INSERTED PLUG BODY WITH SHIELD
LOAD BAR
GROMMET
2. MATERIALS:
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
LOAD BAR: CLEAR POLYCARBONATE, UL 94-V0
GROMMET: BLACK POLYCARBONATE, UL 94-V0
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING
SHIELD: COPPER ALLOY, NICKEL PLATE
3. FOR PRODUCT SPECIFICATION SEE PRO26-01.
4. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.
5. CRIMP IS FOR CABLES WITH OUTSIDE NOMINAL DIAMETERS OF .232 [5.90] TO .248 [6.30].
6. PRODUCT DESIGNED FOR CATEGORY 6 APPLICATIONS.
7. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
8. TERMINATED PLUG HEIGHT: .237 [6.02] ± .005 [0.13].

| | | |
|-----------|-----------------------------------|--------------|
| BAG OF 25 | 50 MICRO-INCHES [1.27um] | SS-39200-014 |
| BULK | 50 MICRO-INCHES [1.27um] | SS-39200-011 |
| PACKAGE | CONTACT PLATING IN MATING AREA | PART NUMBER |



THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS: INCHES (METRIC)
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 (0.13)
ANGLES ARE ±1°
SHEET NO. 1 OF 1

Bel Stewart Connector

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512 Fax: (717) 235-7954 <http://www.stewartconnector.com>

TITLE: 8 CONDUCTOR, 8 POSITION SHIELDED CAT6/6A PLUG WITH LOAD BAR, CRIMP STYLE AND GROMMET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

| | | | |
|-----------|----------|------|---------|
| DRW BY: | TRM | DATE | 1-20-05 |
| APP'D BY: | DHG | DATE | 1-21-05 |
| DRG. NO.: | CT390037 | REV. | B4 |