



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

Features

- Low Current Leakage
- Forward Current: $I_F=215\text{mA}$.
- Small Outline Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking: JY

Maximum Ratings

- Operating Temperature Range: -55°C to $+150^\circ\text{C}$
- Storage Temperature Range: -55°C to $+150^\circ\text{C}$


Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
$V_{(BR)R}$	Reverse Breakdown Voltage ($I_R=100\ \mu\text{A}$)	70	---	---	V
V_F	Forward Voltage	---	---	0.90	V
	$I_F=1.0\text{mA}$	---	---	1.00	
	$I_F=10\text{mA}$	---	---	1.10	
	$I_F=50\text{mA}$	---	---	1.25	
I_R	leakage current ($V_R=75\text{V}$)	---	---	5.0	nA
C_j	Junction Capacitance ($V_R=0$, $f=1.0\text{MHz}$)	---	---	2.0	pF
t_{rr}	Reverse recovery time	---	---	3.0	us

BAV199


Dual Series Switching Diode

SOT-23

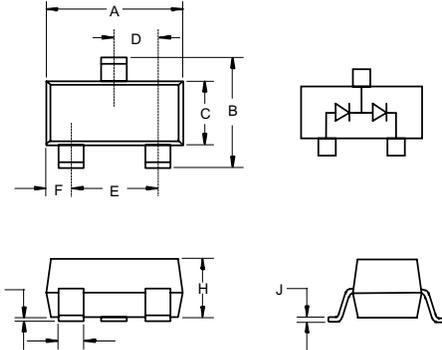


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	


Suggested Solder Pad Layout

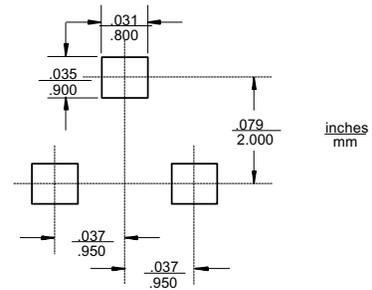


BAV199

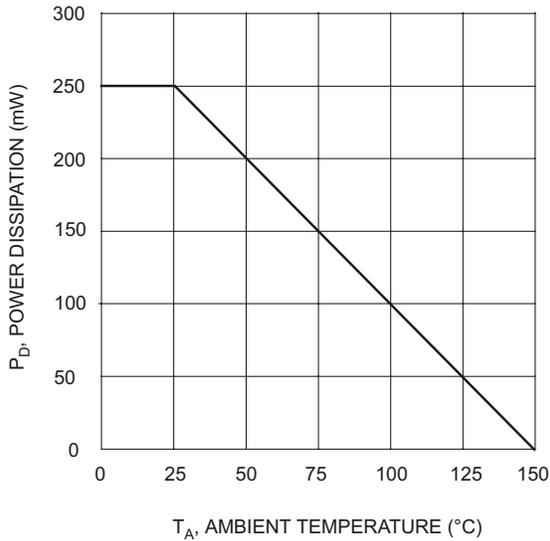


T_A , AMBIENT TEMPERATURE (°C)
Fig. 1 Power Derating Curve

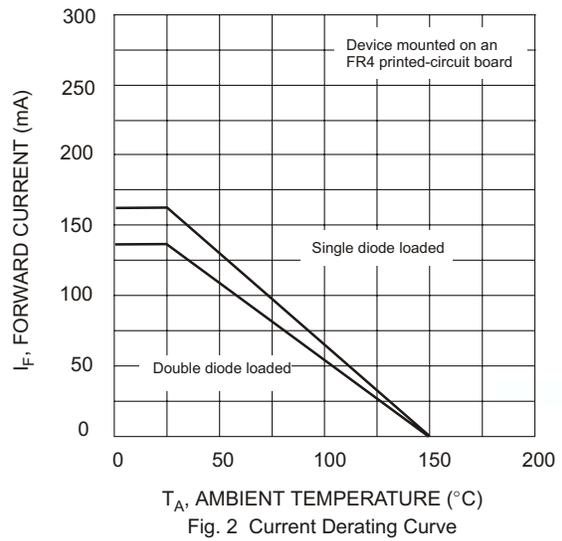

T_A , AMBIENT TEMPERATURE (°C)
Fig. 2 Current Derating Curve

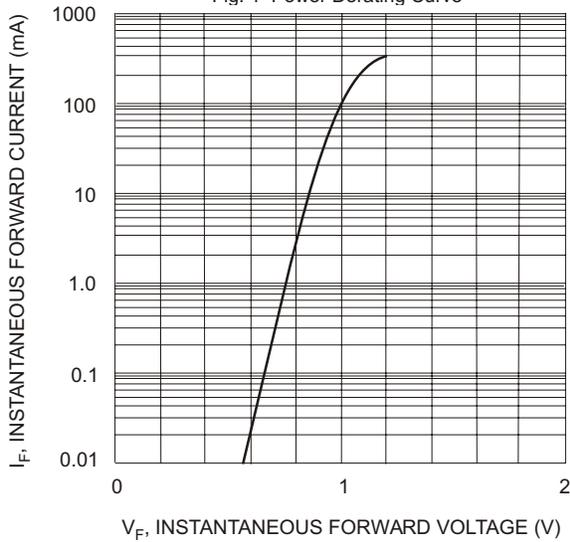

V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 3 Typical Forward Characteristics

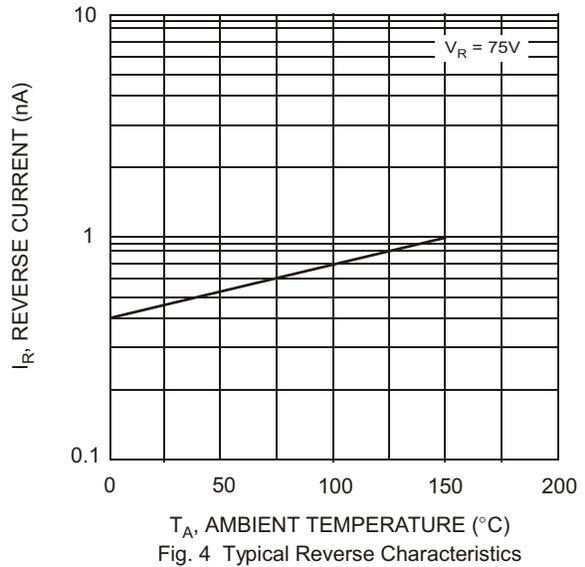

T_A , AMBIENT TEMPERATURE (°C)
Fig. 4 Typical Reverse Characteristics



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com