
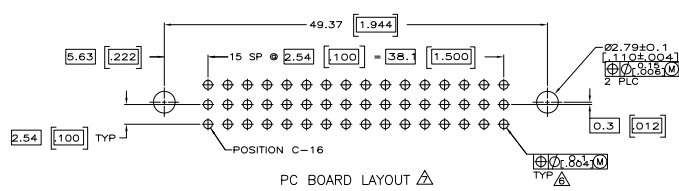


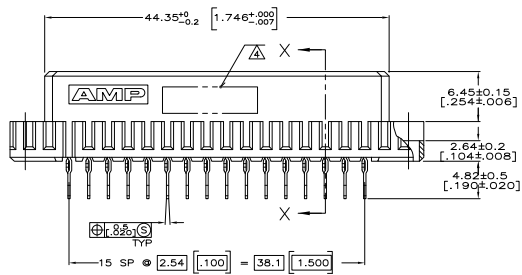


THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	25				
L1		REVISED PER EDD-11-004836			

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA, 0.00127[.000050] NICKEL UNDERPLATE ALL OVER, TIN-LEAD ON TAILS.
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- △ POINT OF MEASUREMENT FOR GOLD.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MIN THICK PC BOARD, RECOMMENDED PC BOARD HOLES ARE Ø.1514[.02]Ø.0453±.001] DRILLED HOLE WITH 0.02-0.07[.001-.003] COPPER AND 0.008[.0003] MIN TIN-LEAD PLATING, FINISHED HOLE AFTER PLATING, Ø0.94-1.09[.037-.043].
- △ CENTER ROW OF PLATED THRU HOLES NOT REQUIRED FOR THIS CONNECTOR LOAD PATTERN.
- △ CONTACT FINISH: DIN 41612 CLASS 3 IN CONTACT AREA, 0.00127[.000050] NICKEL UNDERPLATE ALL OVER, TIN-LEAD ON TAILS.

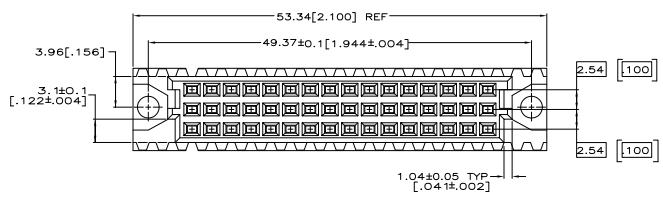

OBSOLETE	1 THRU 16	X	-	X	32	535068-9
	1 THRU 16	X	-	X	32	535068-5
	1 THRU 16	X	-	X	32	535068-4

NOTES	POSITIONS LOADED	C	B	A	NO. OF ROWS LOADED	POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNER: [ ] BRAND: [ ] DATE: [ ]  
 PROJECT FILE: [ ]  
 REVISION: [ ]  
 SIZE: [ ] DATE: [ ] DRAWING NO: [ ]  
 CUSTOMER DRAWING: [ ]

TE Connectivity  
 ASSEMBLY, RECEPTACLE, EUROCARD, TOOLLESS PRESSFIT, 48 POSITION

SIZE: [ ] DATE: [ ] DRAWING NO: [ ]  
 A1 00779 G=535068

REVISION: [ ]  
 DATE: 4.1