


1. FOR USE WITH RG-214/U
2. BRAID CRIMP: USE MILITARY TOOL M22520/5-01, WITH DIE SET M22520/5-25, CAVITY A OR EQUIVALENT
3. CENTER CONTACT CRIMP: USE MILITARY TOOL M22520/5-01, WITH DIE SET M22520/5-25, CAVITY B OR EQUIVALENT

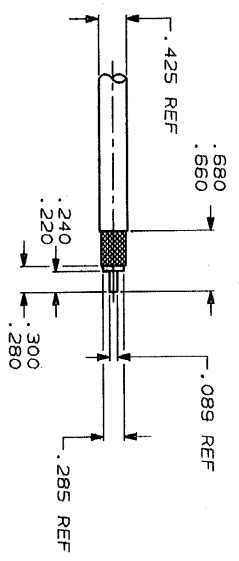

RECOMMENDED STRIP LENGTH
 SCALE 1:1

REV	DATE	APPD	BY
0	3-4-90	PV	

REV	DATE	APPD	BY
0	3-4-90	PV	

QTY	PART NO	DESCRIPTION	ITEM NO
1	447091-3	CONTACT, FEMALE	4
1	228143-4	HEAT SHRINK TUBING	3
1	447101-1	SOCKET ASSEMBLY	2
1	446556-9	FERRULE	1

DO NOT SCALE PRINT. DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC # .005 3 PLC DEC # .005 ANGLES MATERIAL	DRG P. YEAGER CHK J. CABRILLO APPD R. HOSLER PRODUCT SPEC	2-13-90 2-26-90 2-28-90	NAME AMP INCORPORATED AMP Bldg-9, P.O. 17188
FINISH	APPLICATION SPEC	SIZE C	FSC# NO 00779
WEIGHT		SCALE 4:1	DRAWING NO 447087-1

COAXIAL CONTACT,
 SOCKET, SIZE 1

CUSTOMER DRAWING