


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT

REVISIONS						
P	F	ZONE	LTR	DESCRIPTION	DATE	APPROVED
		K1		REVISED PER ECO-11-005294	06 APR 11	HMR

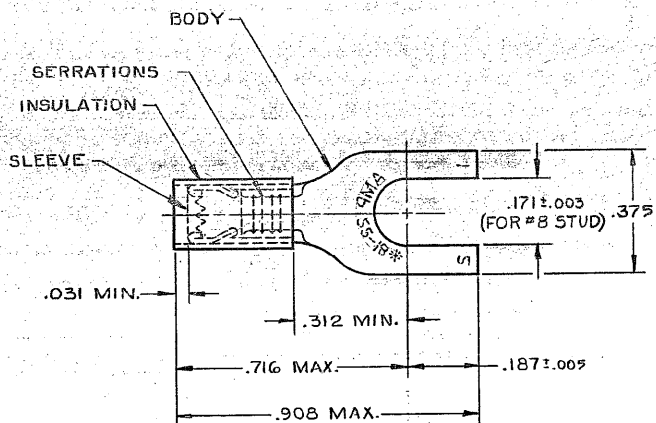

- 1 WIRE INSULATION DIA. = .080 - .125
- 2 TONGUE MATERIAL THK. = .031 ± .002
- 3 22-16 MARKING FOR MILITARY, COMMERCIAL RANGE 22-16.
- 4 TIN PL. (ASTM B 545) .000100 MIN THK.

QUANTITY	DESCRIPTION	PART NO
100	LOOSE PC, BOX	8-32050-1
100	ON TAPE, 3M. BOX	2-32050-3
1000	ON TAPE, LS. BOX	2-32050-2
5000	ON TAPE, REEL	2-32050-1
	LOOSE PIECE	32050

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± .008 ANGLES ±		CONTRACT NO		STE TE Connectivity	
MATERIAL INSULATION: NYLON-RED BODY & SLEEVE: COPPER PER (ASTM B 152)		DR UTA/RFB 9-18-85			
FINISH BODY: 4		CHK Muti... 4/9/86		NAME TERMINAL, P.I.D.G. SPADE WIRE SIZE: 22-16	
		APPD. [Signature]		SIZE B FSCM NO 00779 DRAWING NO 32050	
		OTHER APPD		SCALE NTS SHEET 1 OF 1	

CUSTOMER DRAWING