

"MINI" AUTOMOTIVE FUSE CLIPS & HOLDERS

For .110 (2.8) × .032 (.80) MINI BLADE FUSES


For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent

VERTICAL FUSE ENTRY


Thru Hole Mount




- Low Profile



Mounting Detail For Two Clips



Pad Layout For Two Clips




AVAILABLE ON TAPE AND REEL

Surface Mount



- Low Profile



CAT. NO. 3563 (Bulk)

CAT. NO. 3563TR (Tape & Reel)

Tape & Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (1500 pieces per reel)

CAT. NO. 3564


SPECIFICATIONS

Material: .012 (.30) thick Brass, Tin Nickel Plate



Insulator: Glass filled Nylon, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Mounting Detail For Two Clips



CAT. NO. 3544

CAT. NO. 3544-2

LOW PROFILE MINI FUSE HOLDER

For Littelfuse Low Profile Mini 897 series or equivalent

- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time


SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate


Insulator: PBT, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)





Mounting Detail



Refer to page 35 for Cat. No. 3557 Clip details

Mounting Detail



CAT. NO. 3557-2

CAT. NO. 3568

HORIZONTAL FUSE ENTRY

For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent


SPECIFICATIONS

Contacts: .012 (.30) thick Brass, Tin Nickel Plate



Insulator: PBT, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

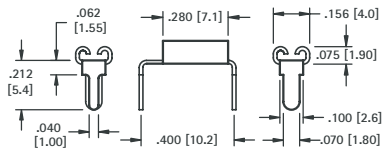

Mounting Detail For Two Clips

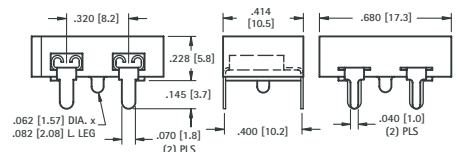

CAT. NO. 3549

CAT. NO. 3549-2

"AUTO" FUSE CLIPS & HOLDERS