
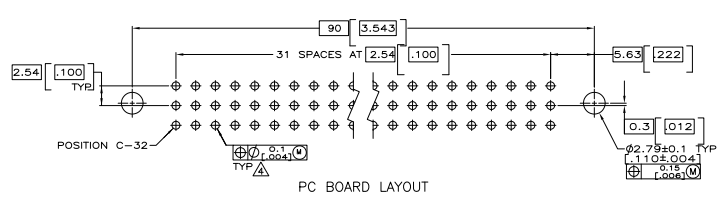

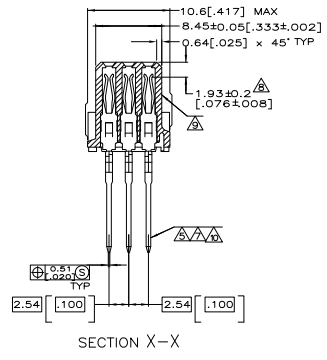
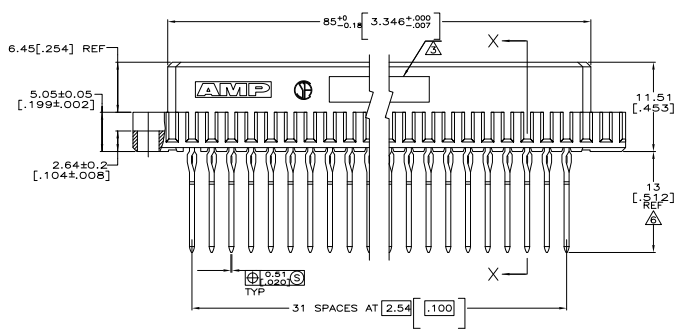


REV	DATE	DESCRIPTION	BY	APP'D
AD	25			
		REVISED PER EDD-10-021908		

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ PART NUMBER AND DATE CODE HOT STAMPED IN THIS APPROXIMATE AREA.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD DRILLED HOLES ARE 1.15±0.025[.0453±0.010] DIAMETER WITH 0.02-0.08[.001-.003] COPPER AND 0.008[.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING IS 1.02±0.08[.040±.002] DIAMETER.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD PLATE ON POSTS.
- △ TAIL LENGTH AFTER SEATING IN PC BOARD.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA AND LAST 5.08[.200] OF POST.
- △ CONTACT POINT AFTER SEATED IN PC BOARD.
- △ HOT STAMPING ON THIS SIDE.
- △ CONTACT FINISH: 0.00076[.000030] GOLD IN CONTACT AREA AND LAST 5.08[.200] OF POST. 0.00127[.000050] NICKEL UNDERPLATE ALL OVER.

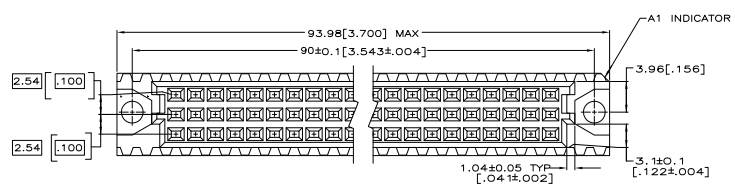

△	1-148057-5
△	1-148057-4
△	148057-5
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNED BY: T/WH	DATE: 1/10/08	REVISED BY: T/WH	DATE: 1/10/08
DRAWN BY: J/P		CHECKED BY: J/P	DATE: 1/10/08	APPROVED BY: J/P	DATE: 1/10/08
TITLE: RECEPTACLE ASSEMBLY, EUROCARD, TYPE C		TITEL: RECEPTACLE ASSEMBLY, EUROCARD, TYPE C			
PART NO: 148057-5		PART NO: 148057-5			
REV: A		REV: A			
DATE: 1/10/08		DATE: 1/10/08			
DRAWN BY: J/P		DRAWN BY: J/P			
CHECKED BY: J/P		CHECKED BY: J/P			
APPROVED BY: J/P		APPROVED BY: J/P			
DATE: 1/10/08		DATE: 1/10/08			
SCALE: 1:1		SCALE: 1:1			
SHEET: 1 OF 1		SHEET: 1 OF 1			
REV: G		REV: G			