NOTES:

1 CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41612 AND DIN 41611, PART 2 AND 5.

2 MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER. COLOR:GREY

3 AT CONTACT AREA GOLD OVER PALLADIUM (DURAGOLD) PERF. LEVEL 2 ACC. DIN 41612 AND IEC 603-2 REMAINDER TIN-LEAD.

4 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE OF MATING AREA AT SIDE OF ROW C.

5 SOLDER POSTS SUITABLE FOR P.C.B. HOLE DIA 1,0-1,2 NOM.

6 AT CONTACT AREA GOLD PERF. LEVEL 2 ACC. DIN 41612 AND IEC 603-2 REMAINDER TIN-LEAD.

DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE PROJECTION

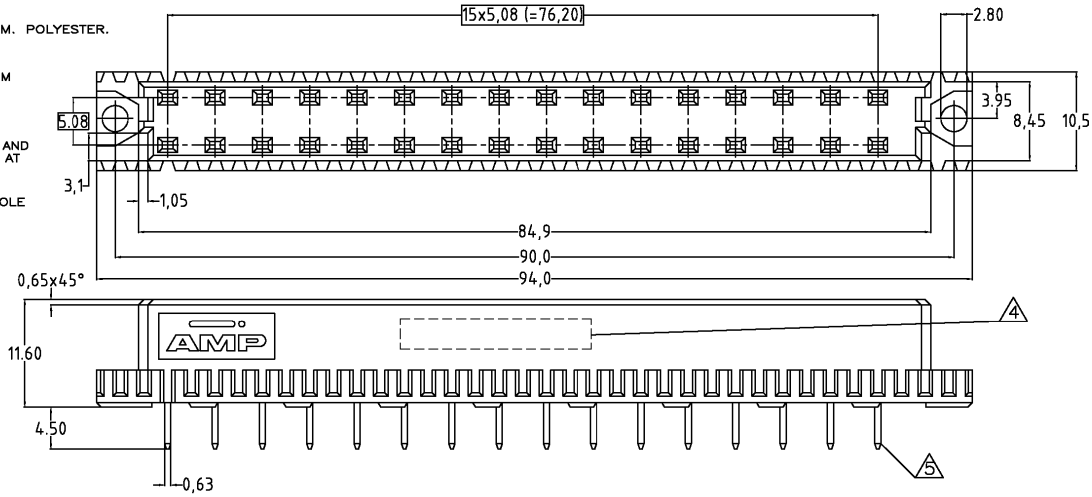

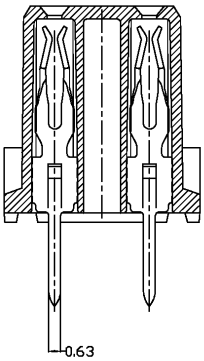

ROW	C	D
POS		
32	X	X
30	X	X
28	X	X
26	X	X
24	X	X
22	X	X
20	X	X
18	X	X
16	X	X
14	X	X
12	X	X
10	X	X
8	X	X
6	X	X
4	X	X
2	X	X

AN ASTERISK ,,X'' DENOTES A SIGNAL CONTACT.

		FINISH	MATERIAL	PARTNUMBER
		6	2	106779-4
	OBSOLETE	3	2	6-106779-4

LTR.	REVISION RECORD	DR.	CHK.	DATE
	-	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
A	SR10-0122-01	BC	BC	22.03.01
0	EH0946-93	R.v.L.	J.v.G.	22.12.93

CUSTOMER DRAWING — FOR REFERENCE ONLY WILL NOT BE UPDATED

© COPYRIGHT 19 - BY TYCO ELECTRONICS EC N.V. ALL INTERNATIONAL RIGHTS RESERVED.AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.

THIS DRAWING IS UNPUBLISHED
~~RELEASED FOR PUBLICATION ,19~~

AMP — Tyco Electronics Corp. Oostkamp, Belgium.

NAME: 32 POS D FEMALE CONNECTOR WITH 0,6 SQR SOLDER POSTS FOR 2,4mm. P.C.BOARD THK'S

DR. COLPAERT B.	CHK.COLPAERT B.	APP. COLPAERT B.	DWG.No.	REV.LTR.	SHEET	
DATE 22.03.01	DATE 22.03.01	DATE 22.03.01	C-106779	A	1 OF 1	A3

R6-128 (REV.04-91)

Downloaded from Elcodis.com electronic components distributor