



4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

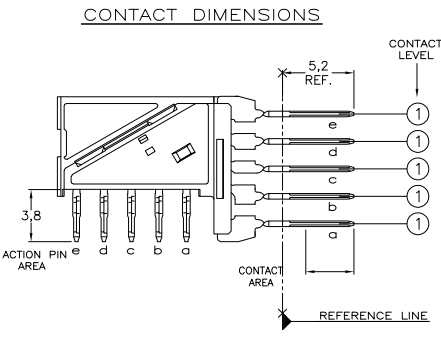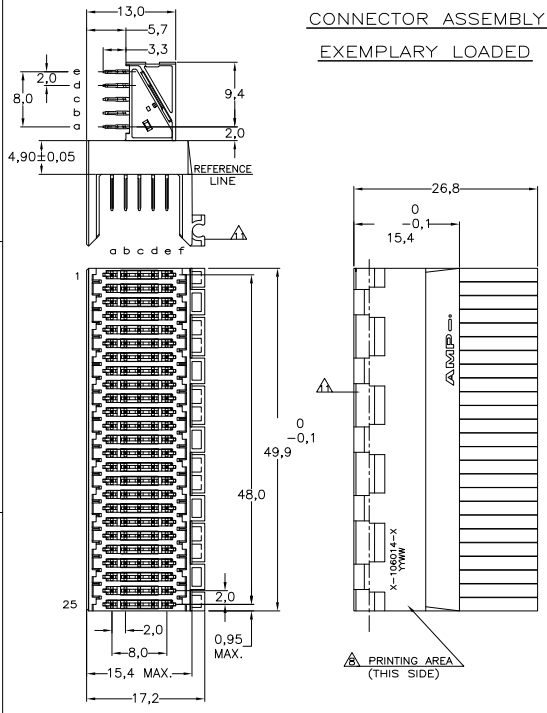

LOC	DIST	REVISIONS		
F	LR	DESCRIPTION	DATE	BY
K		EH-1195-00	06-07-04	DvdB BM
L		EH10-0680-05	30-05-05	BSV BM
L1		ECR-06-002635	07-02-06	BSV BM

**RECOMMENDED PCB-HOLE LAY-OUT
COMPONENT SIDE SHOWN**

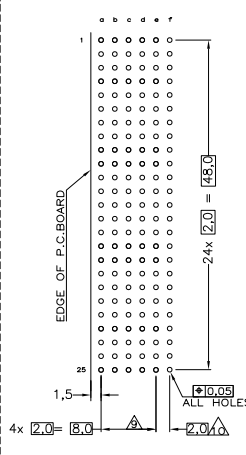

CONTACT LAYOUT

	a	b	c	d	e
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1
6	1	1	1	1	1
7	1	1	1	1	1
8	1	1	1	1	1
9	1	1	1	1	1
10	1	1	1	1	1
11	1	1	1	1	1
12	1	1	1	1	1
13	1	1	1	1	1
14	1	1	1	1	1
15	1	1	1	1	1
16	1	1	1	1	1
17	1	1	1	1	1
18	1	1	1	1	1
19	1	1	1	1	1
20	1	1	1	1	1
21	1	1	1	1	1
22	1	1	1	1	1
23	1	1	1	1	1
24	1	1	1	1	1
25	1	1	1	1	1

**P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION**

- NOTES:**
- △ MATERIAL HOUSING : GREY GLASSFILLED POLYESTER
UL-RATING VO
CONTACT : PHOSPHORBRONZE
 - △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
 - △ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - △ CONNECTOR MARKED WITH PARTNUMBER AND DATECODE
 - △ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 - △ HOLES IN ROW f FOR POSSIBLE FUTURE USE OF GROUND RETURN SHIELDS. (NOT YET TOOLED)
 - △ CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.

Y	△	△	1-106014-9
N	△	△	1-106014-1 △
Y	△	△	106014-9
N	△	△	106014-4
N	△	△	106014-1
CONSERVATION TREATMENT		CONTACT FINISH	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM: L.J.D. HEIJDEN 1502097
 CHK: D. TRUIJEN 1502097
 NAME: F.V. KONINGSBRUGGE
 PRODUCT SPEC: 108-19082
 APPLICATION SPEC: 114-19029
 WEIGHT: -
 FINISH: -

Tyco Electronics Corporation
 s-Hertogenbosch, Netherlands.
 Z-PACK 2MM HM TYPE B
 125 POS. RIGHT ANGLE MALE
 CONNECTOR ASSEMBLY

SIZE: A2 CASE CODE: 00779 DRAWING NO: C=106014 RESTRICTED TO: -
 CUSTOMER DRAWING SCALE: NTS SHEET 1 OF 1 REV: L1

AMP 1471-9 REV 31MM2000

106014

A