

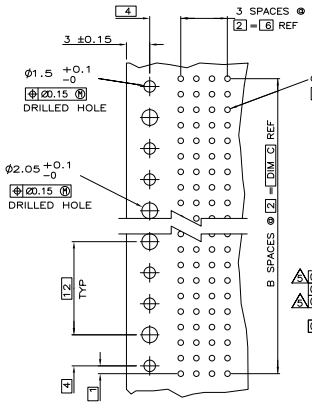
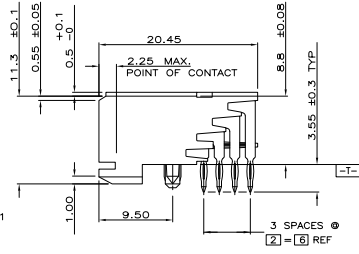
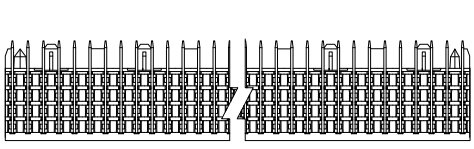
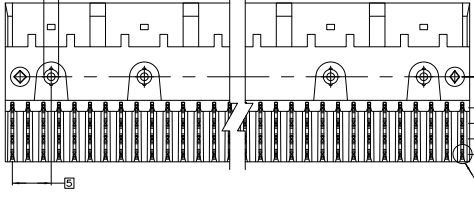
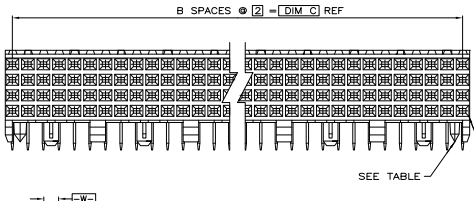


THIS DRAWING IS UNPUBLISHED. REPRODUCED FOR INFORMATION.
 © 2005 TYS ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK
AD 00				
Y2		REVISED PER ECO-10-00044		

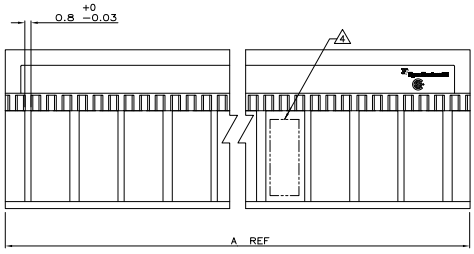

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCP000 G30A 32250, COLOR: NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR-BRONZE.
- △ CONTACT FINISH: UNDERPLATE (ENTIRE CONTACT) - 0.00127 MIN. NICKEL ON MATING SURFACES- CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA UNCONTROLLED ENVIRONMENT ON LEADS- 0.0006 MIN. TIN-LEAD, OVER UNDERPLATE LUBRICATION (ENTIRE CONTACT) SURFACE CONDITIONER PER TYCO SPEC 112-1002 AFTER PLATING.
- △ PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED APPROXIMATELY AS SHOWN.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS



RECOMMENDED CIRCUIT PATTERN PER IPC-D300 TYPE II, CLASS C (COMPONENT SIDE)

NO	34	17	35.88	△	72	1-536511-2	
△ OBSOLETE	NO	130	65	131.88	△	264	1-536511-4
△ OBSOLETE	NO	106	53	107.88	△	216	1-536511-0
△ OBSOLETE	NO	118	59	119.88	△	240	536511-9
NO	82	41	83.88	△	168	536511-8	
NO	66	33	67.88	△	136	536511-7	
NO	58	29	59.88	△	120	536511-6	
NO	70	35	71.88	△	144	536511-5	
NO	94	47	95.88	△	192	536511-4	
NO	46	23	47.88	△	96	536511-3	
NO	22	11	23.88	△	48	536511-2	
YES	10	5	11.88	△	24	536511-1	

POSITIONING PEGS	C	B	A	FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 10/16/02
 DRAWN BY: J. BENDER
 CHECKED BY: J. BENDER
 APPROVED BY: J. BENDER
 TYS Electronics Corporation
 Harrisburg, PA 17105-3608
 RCPY. ASS'Y. SIGNAL MODULE, Z-PACK 2mm FB
 4 ROW, 3.55mm PRESS FIT LEAD LENGTH
 SIZE: 4.1
 DATE: 10/16/02
 DRAWN BY: J. BENDER
 CHECKED BY: J. BENDER
 APPROVED BY: J. BENDER
 CUSTOMER DRAWING