

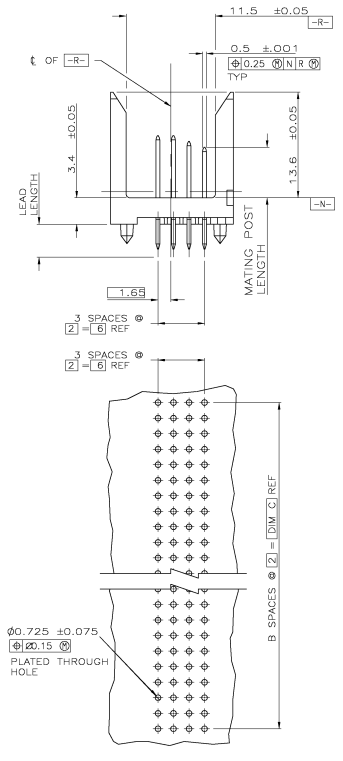





REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00	RELEASED PER EC 0512-0235-04			

△ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCP000 G30A 32250.
 △ CONTACT MATERIAL: PHOSPHOR BRONZE PER UNS ALLOY NO. C51100, TEMPER: H04.
 △ CONTACT FINISH:(E)
 UNDERPLATE (ENTIRE CONTACT):
 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
 ON MATING SURFACES:
 FLASH GOLD PER ASTM B 488, OVER
 0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
 0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
 ON LEADS:
 0.00381 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
 LUBRICATION (MIN MATING SURFACES):
 SURFACE CONDITIONER AFTER PLATING.
 △ PART MARKING, LOCATED APPROXIMATELY AS SHOWN.



ROW	D	CD	CD
C	CE	CE	CE
B	CF	CF	CF
A	CF	CF	CF

1 2
 POSITION

CODE LETTER	MATING POST LENGTH ±0.10	LEAD LENGTH (REF)
CD	6.5	3.2
CE	7.25	3.2
CF	8	3.2

6	1	10	5	11.8B	△	8	5536621-1
E	D	C	B	A	FINISH	NO OF POS	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT							
DESIGNED BY: [REDACTED]				DATE: 02/07/94			
CHECKED BY: [REDACTED]				DATE: 02/07/94			
DRAWN BY: [REDACTED]				DATE: 02/07/94			
APPROVED BY: [REDACTED]				DATE: 02/07/94			
MATERIAL: [REDACTED]				WEIGHT: [REDACTED]			
PART: [REDACTED]				CUSTOMER DRAWING			
SEE: [REDACTED]				DRAWING NO: A100778			
PART NO: [REDACTED]				REV: 1			
DATE: 02/07/94				BY: [REDACTED]			
DRAWN BY: [REDACTED]				DATE: 02/07/94			