

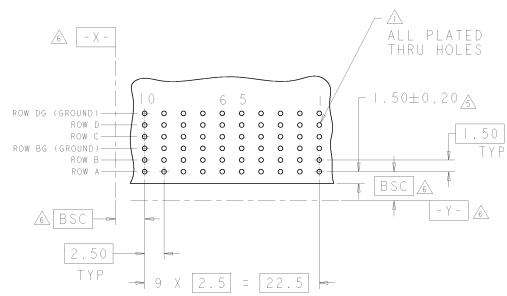
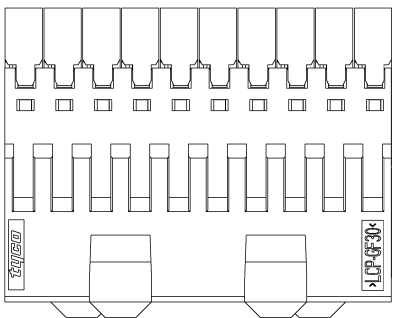
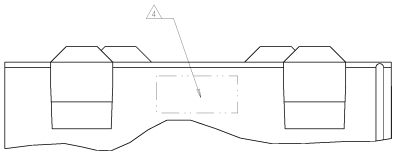


8	7	6	5	4	3	2	1
DATE STARTED BY: [blank]	DESIGNED FOR: [blank]	DATE: [blank]					
BY: [blank]	BY: [blank]	BY: [blank]					

REV. NO.		REVISIONS		DATE	BY	CHKD	APPD
00	AD	1	INITIAL				
0		2	REVISED PER 0512-0183-02	10/08/95	ELS	MFS	
A		3	REV PER 0512-0442-03	10/08/95	RG	BP	
B		4	REV PER ECG-07-519592	10/08/95	BC	BP	

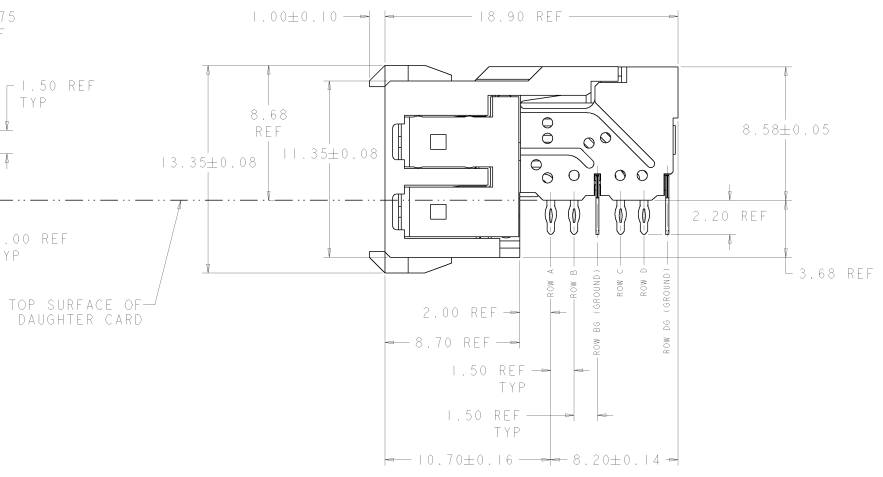

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0 RATED.
- △ FINISH: CONTACT AND SHIELD MATING AREA - 0.76µm MIN NICKEL
COMPLIANT PIN AREA - 0.5µm MIN BRIGHT TIN-LEAD OVER 1.27µm MIN NICKEL
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- △ DATUMS APPLIES TO CENTERLINE OF THRU HOLE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT, TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

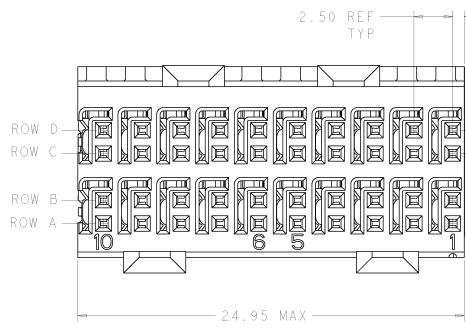

1469028-1
PART NUMBER

Tyco Electronics MIDDLETOWN, PA 17055-0008		RECEPTACLE ASSEMBLY, 2 PAIR, 25mm, RM2d	
DATE: 05120008 PARTITION: 00072007 PARTITION: 00072007	PART: 1469028 REV: A CUSTOMER DRAWING:	DATE: 05120008 PARTITION: 00072007 PARTITION: 00072007	PART: 1469028 REV: A CUSTOMER DRAWING: