

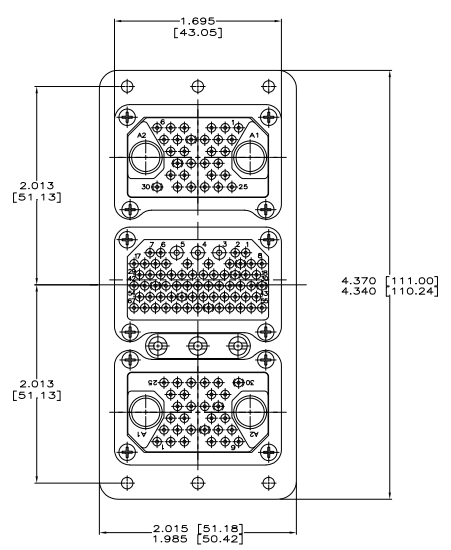
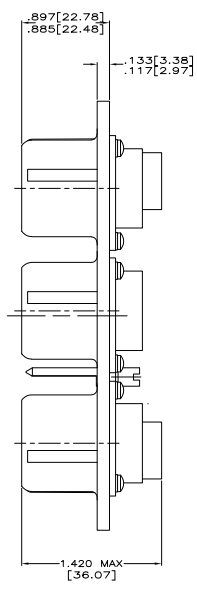


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PURIFICATION. © AMPHENOL. BY THE ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
DF	AO				
B		REV PER ECO 06-00164			

QTY	CONTACT DESCRIPTION	PART NUMBER
4	SIZE 5 COAX (SOCKET)	225791-2
3	SIZE 16 (SOCKET)	205117-1
124	SIZE 20 (SOCKET)	205116-1

1. MATERIAL AND FINISH:  
SHELL: DIE CAST ALUMINUM ALLOY PER FED. SPEC QQ-A-591.  
STANDARD FINISH: CADMIUM PLATE PER QQ-P-416, TYPE I,  
CLASS 2 YELLOW CHROMATE CONVERSION.  
INSERT RETENTION PLATE: ALUMINUM ALLOY, BLUE ANODIZE  
PER MIL-A-8625.  
SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATED.  
POLARIZING POSTS: STAINLESS STEEL, PASSIVATED.  
POLARIZING NUTS: BRASS, CADMIUM PLATED.

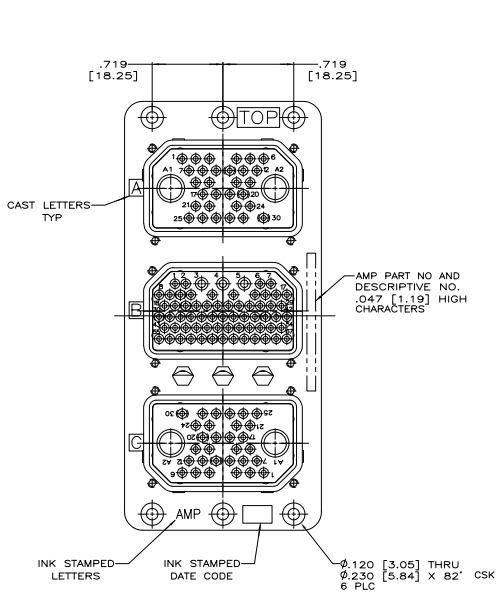

#4-40 CLINCH NUT DETAIL  
IN 4 CORNERS  
443197-3 ONLY

KEYING POSITION	DESCRIPTIVE NO.	PART NO.
*01*	RM3P32C2S67S32C2S-0101 (200)	443197-3
*02*	RM3P32C2S67S32C2S-0002 (200)	443197-2
*01*	RM3P32C2S67S32C2S-0001 (200)	443197-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DRAWING NO. 443197-3. REV. 1. DATE 06-00164. BY: A.1. CHECKED: G.1. APPROVED: B.1. CUSTOMER DRAWING. AMPHENOL CORPORATION, HARRISBURG, PA 17105-2608. CONNECTOR ASSY, ARINC 404, PLUG.