
Pomona®

Model 1469 Adapter – Binding Post To BNC Male, Four Terminal Isolation

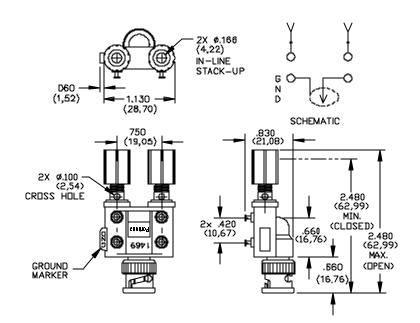

FEATURES:

- Permits single or double banana plugs to be used with equipment having BNC female
- Provides isolation for a four terminal network
- Binding posts facilitate connections of test leads or additional components
- Bright tin plated solder turret terminals provide permanent noise-free connections

MATERIALS:

Upper Conn: Binding Posts, Insulated Material: Binding Post Body – Brass per QQ-B-626, Alloy 360, ¹/₂ Hard Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches Insulation: Polycarbonate Color: One red, one black Insulation: Polypropylene molded to binding posts and BNC Male, Color: Black Marking: "1469 POMONA" Lower Conn: BNC Male Finish: Body and Fittings – Tarnish resistant Nominal Impedance: 50 Ohms Center Contact – Gold plated per requirements of MIL-C-39012 Terminals: Material: Brass per QQ-B-626, Alloy 360, ¹/₂ Hard Finish: Bright tin plated per MIL-T-10727 Type I, 100/250 microinches

RATINGS:

Operating Temperature: +55° C. (+131° F.) Max. Operating Voltage: Hand-held Testing: 30VAC/60VDC Max. Hands Free Testing in Controlled Voltage Environments: 500 VRMS Max.

ORDERING INFORMATION: Model 1469

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 4/15/02 SY/EH/LS
 Sales: 909-469-2900
 Fax: 909-629-3317

 Last saved by PN
 Technical Assistance: 800-241-2060

PomonaACCESS 90547 (800) 444-6785 or (909) 469-2991 More drawings available at www.pomonaelectronics.com Page 1 of 1

S:\Engineering\Release\DataSheets\FlukeDataSheet\d1469 1 02.dog