## Thermofit Molded Parts Specification Control Drawing Limited Distribution


Part Number : 202D1XX-X-60

Description : Boot, Straight, With Lip

- 1. All dimensions are in  $\frac{\text{inches}}{[\text{millimeters}]}$
- 2. Dimensions appearing in table are as follows:
  - a As Supplied
  - b After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.
- Parts shall have color stripe .12 wide x 360' around outside surface approx. as shown and must meet requirements set forth in MS3109. colors shall be as follows:

Dash No.	Color
-3	White
-4	Red
-12	Yellow

5. Parts to have only one lip because of core change.






TABLE OF DIMENSIONS											
PART	н		J		Р	R	s	Т	JO	w	
NUMBER	Min	Max	Min	Min	Max	±10%	Ref	Ref	Ref	±10%	±20%
	a	ь	-3,-4 a	-12 a	b	b	ь	b	b	b	ь
202D121-X-60	.92	.41	.92	.49	.22	1.50	.83	.12	.04	.40	.07
	[23,3]	[10,5]	[23,3]	[12,4]	[5,6]	[38,1]	[21,1]	[3,0]	[1,0]	[10,2]	[1,78]
202D132-X-60	1.12	.56	1.12	<u>.58</u>	.26	2.16	1.09	. <u>12</u>	<u>.04</u>	.65	.07
	[28,4]	[14.3]	[28,4]	[14,7]	[6,6]	[54,9]	[27,7]	[3,0]	[1,0]	[16,5]	[1,78]
202D142-X-60	1.22	<u>.70</u>	1.22	.63	.28	2.63	1.39	.12	.04	.70	. <u>08</u>
	[31,0]	[17.8]	[31,0]	[16,0]	[7,2]	[66,8]	[35,3]	[3,0]	[1,0]	[17,8]	[2,03]
202D153-X-60	1.42	.88	1.42	.73	. <u>33</u>	3.15	1.63	.12	.04	.82	.08
	[36,0]	[22,4]	[36,0]	[18,5]	[8,4]	[80,0]	[41,4]	[3,0]	[1,0]	[20,8]	[2,03]
202D163-X-60	1.68	1.11	1.68	.87	.39	4.08	2.22	.12	. <u>065</u>	.97	.09
	[42,7]	[28,2]	[42,7]	[22,0]	[9,9]	[103,6]	[56,4]	[3,0]	[1,65]	[24,6]	[2,29]
202D174-X-60	2.04	1.38	2.04	1.39	.62	5.13	2.54	.12	. <u>065</u>	1.56	.13
	[51,8]	[35,1]	[51,8]	[35,3]	[15,8]	[130,3]	[64,5]	[3,0]	[1,65]	[39,6]	[3,3]
202D185-X-60	2.60	1.75	2.60	1.80	.80	6.50	3.31	.12	. <u>08</u>	1.90	.16
	[66,0]	[44,5]	[66,0]	[45,7]	[20,4]	[165,1]	[84,1]	[3,0]	[2,0]	[48,3]	[4,06]
202D196-X-60	3.22	2.27	3.22	<u>2.25</u>	1.00	7.00	3.75	<u>.12</u>	. <u>08</u>	1.88	.16
	[81,7]	[57,6]	[81,7]	[57,1]	[25,4]	[177,8]	[95,3]	[3,0]	[2,0]	[47,8]	[4,06]

## Raychem

RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Revision: B

Part Number :

202D1XX-X-60

202D1XX-X-60

Description: Boot, Straight, With Lip

Date: 4/28/94


Part Number :

Description: Boot, Straight, With Lip

## Thermofit Molded Parts Specification Control Drawing Limited Distribution

COMPATABILITY CHART							
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION		
-3	Polyolefin, Semi-rigid	RT-301	/42	S-1017	Adhesive		
-4	Polyolefin, Flexible	RT-1304	/42	S-1017	Adhesive		
-12	*VITON, Flexible	RT-1312	N/A				

\*VITON is a Registered Trademark of Dupont

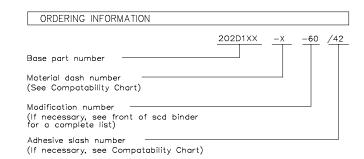

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

## Raychem

RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Revision: B Date: 4/28/94 Part Number : 202D1XX-X-60

Description: Boot, Straight, With Lip

CAD FILE MP94154