

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LTR	DESCRIPTION	DATE	BY	APPD
		01	REVISED PER ECO-05-007704	02SEP05	BM KW

- △ CONTACT CRIMP TOOLING: CRIMP TOOL M22520/2-01 WITH POSITIONER DMC K997 SELECTOR SETTING #4 FOR RG-174/U, RG-188/U & RG-316/U SINGLE AND DOUBLE SHIELDED CABLE.
- △ FERRULE CRIMP TOOLING: CRIMP TOOL M22520/5-01 WITH DIE SET M22520/5-35B OR USE A 3.25 [.128] X 10.16 [.400] HEX DIE SET.
- 3. PRODUCT DESIGNED TO MEET PRODUCT SPECIFICATION 108-1574.
- 4. INSTRUCTION SHEET: 408-4032

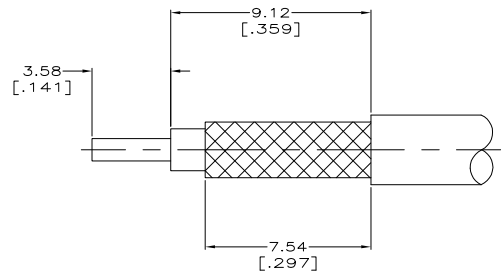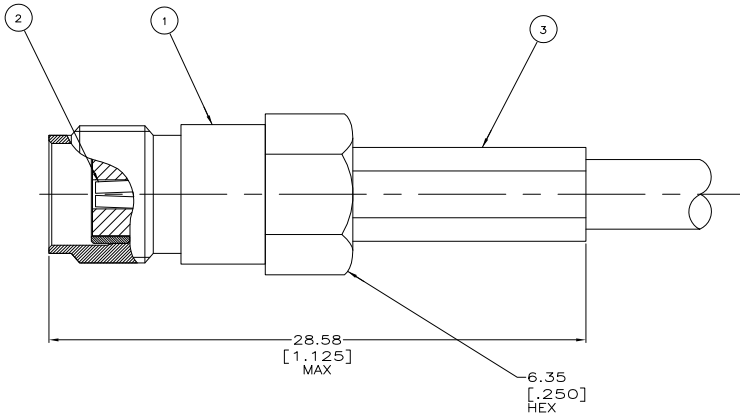

RECOMMENDED STRIP LENGTHS

△△	RG-174, -188, & -316/U	9-446556-1	447842-3	447963-2	5447648-3
CRIMP TOOLING	CABLE	③ FERRULE QTY=1	② CONTACT QTY=1	① JACK ASSY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: J. VARELA - 31JAN2005 CHK: J. HAVENER - 31JAN2005		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		TO PARTS LIST: D. CAMELID - 31JAN2005		Tyco Electronics	
0 PLC ±		PRODUCT SPEC: APPLICATION SPEC		JACK, HEX CRIMP, COMMERCIAL, SMA	
1 PLC ±		MATERIAL: -		SIZE: A2	
2 PLC ±		FINISH: -		CAGE CODE: 00779	
3 PLC ±		ANGLE: -		DRAWING NO: 5447648	
4 PLC ±		RESTRICTED TO: -		CUSTOMER DRAWING	
MATERIAL: -		WEIGHT: -		SCALE: 8:1	
FINISH: -		SHEET: 1 of 1		REV: 01	

AMP 1471-9 REV 31MAR2000

5447648

A