

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LTR	DESCRIPTION	DATE	OWN
AJ	16	REV PER ECO 08-014295	6/9/2008	DW JL

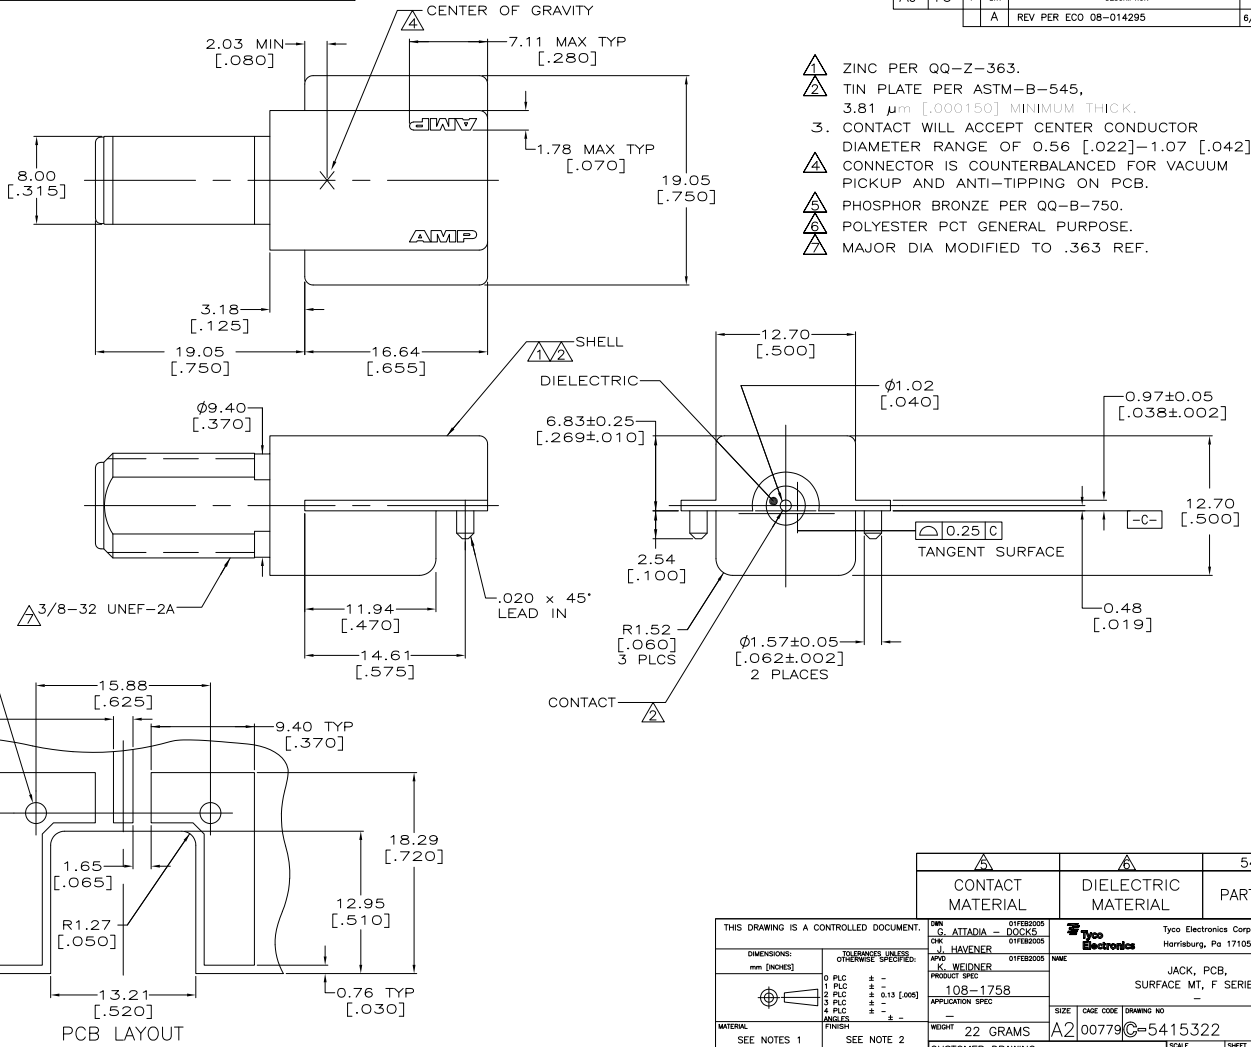

- 1 ZINC PER QQ-Z-363.
- 2 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 3. CONTACT WILL ACCEPT CENTER CONDUCTOR DIAMETER RANGE OF 0.56 [.022]-1.07 [.042].
- 4 CONNECTOR IS COUNTERBALANCED FOR VACUUM PICKUP AND ANTI-TIPPING ON PCB.
- 5 PHOSPHOR BRONZE PER QQ-B-750.
- 6 POLYESTER PCT GENERAL PURPOSE.
- 7 MAJOR DIA MODIFIED TO .363 REF.

CONTACT MATERIAL	DIELECTRIC MATERIAL	PART NUMBER
		5415322-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: G. ATTADIA 01FEB2005 CHK: J. HAVENER 01FEB2005 APP: K. WEIDNER 01FEB2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm [INCHES] FINISH: SEE NOTES 1	TOLENCES UNLESS OTHERWISE SPECIFIED: 0 PLG ± .005 1 PLG ± .005 2 PLG ± 0.13 (.005) 3 PLG ± .005 4 PLG ± .005 ANGLES ± .5	PRODUCT SPEC: 108-1758 APPLICATION SPEC: - WEIGHT: 22 GRAMS CUSTOMER DRAWING	JACK, PCB, SURFACE MT, F SERIES SIZE: CASE CODE DRAWING NO: A2 00779 C=5415322 RESTRICTED TO: - SCALE: 4:1 SHEET: 1 OF 1 REV: A

AMP 1471-9 REV 31MM2000

5415322