THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AJ	16

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	O	REV PER EC-0S14-0496-04	01FEB2005	LV	KW

1. PHOSPHOR BRONZE PER QQ-B-750
2. ZINC PER QQ-Z-363.
3. PTFE PER MIL-P-19468.
4. TIN PLATE PER ASTM B 545. 3.81µm [.000150] MINIMUM THICK.
5. CONNECTOR WILL ACCEPT A CENTER CONDUCTOR DIAMETER OF 0.56[.022]-1.19[.047].
6. RETURN LOSS: -20 dB NOMINAL, UP TO 1 GHz.
7. MAJOR DIAMETER MODIFIED TO .363 REF.



SUGGESTED PANEL CUTOUT

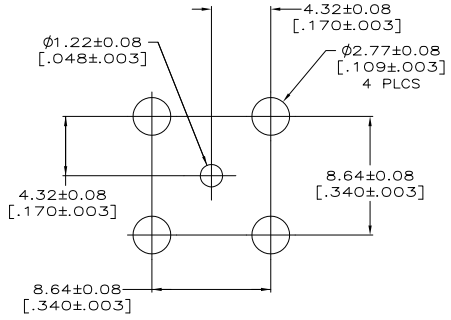

RECOMMENDED PCB CONFIGURATION

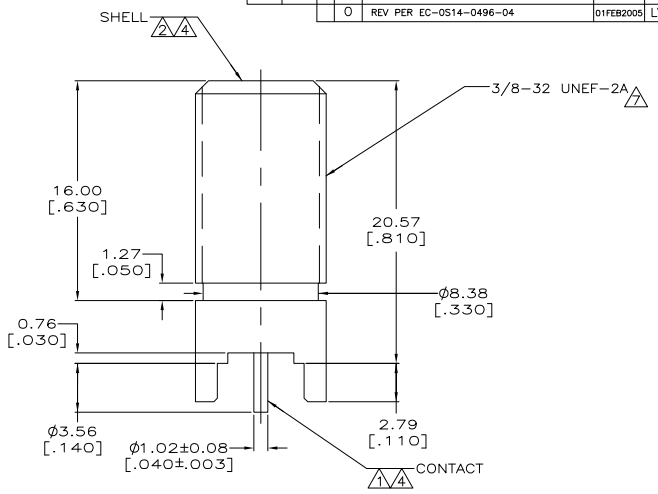



5887046

5887046-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.20 [.008]
4 PLC ± -
ANGLES ± -

MATERIAL: SEE NOTES 1-3
FINISH: SEE NOTE 4

DWN L. VARELA - DOCK5 01FEB2005
CHK J. HAVENER 01FEB2005
APVD K. WEIDNER 01FEB2005
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: JACK, PCB, VERTICAL, F SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-5887046	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV O

Downloaded from Elcodis.com electronic components distributor