THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION APRIL ,2004.
© COPYRIGHT 2004 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	EBD0-0035-03	05FEB04	RS	FWK

NOTES:

1. SINGLE PACK IN ACCORDANCE WITH SPEC 107-3275
2. 100 TRAY PACK IN ACCORDANCE WITH SPEC 107-3275
3. 0.08µm Au PLATING OVER 1.27µm Ni PLATING
4. 0.76µm Au PLATING OVER 1.27µm Ni PLATING OVER 0.76µm Cu PLATING
5. PASSIVATED
6. PLATING AS PER BODY, EXCEPT FOR PASSIVATED WHICH IS NICKEL PLATED
7. HAND TOOL 9-1478240-0
8. DIE SET 9-1478242-0
9. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
10. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

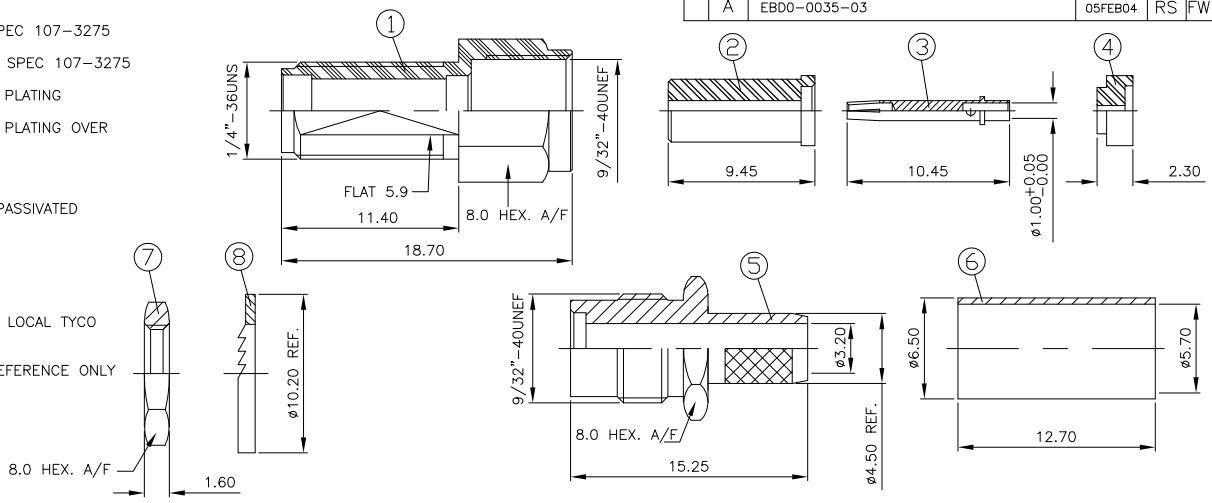

RECOMMENDED CABLE STRIPPING DIM'S



RECOMMENDED MOUNTING HOLE DIM'S



RECOMMENDED CRIMP SLEEVE A/F HEX



				1	1	1	1	STAINLESS STEEL (6)	WASHER	8
				1	1	1	1	STAINLESS STEEL (6)	NUT	7
				1	1	1	1	BRASS (6)	CRIMP SLEEVE	6
				1	1	–	–	STAINLESS STEEL (6)	BODY	5
				–	–	1	1	STAINLESS STEEL (3)	BODY	5
				1	1	1	1	PTFE	INSULATOR	4
				1	1	1	1	BERYLLIUM COPPER (4)	CENTER SOCKET	3
				1	1	1	1	PTFE	INSULATOR	2
				1	1	–	–	STAINLESS STEEL (6)	SHELL	1
				–	–	1	1	STAINLESS STEEL (3)	SHELL	1
				2--1	2--0	1--1	1--0	MATERIAL	DESCRIPTION	ITEM
				(2)	(1)	(2)	(1)			
				QUANTITY PER ASSY				PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE
FINISH: –

DWN	R.SMITH 05FEB04
CHK	S.PARLOW 05FEB04
APVD	F.WHEELER-KING 05FEB04
PRODUCT SPEC	108-3460
APPLICATION SPEC	411-3276
WEIGHT	–

tyco Electronics
Tyco Electronics Corporation
Bideford, UK, EX39 4HE

NAME: SMA STRAIGHT BULKHEAD, JACK SOLDER PIN, CRIMP ATTACHMENT RG55B/U, 142B/U, 223/U, 400/U, KX23

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1478961	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A

AMP 1470-19 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor