





SUGGESTED PRINTED CIRCUIT BOARD MOUNTING DIMENSIONS

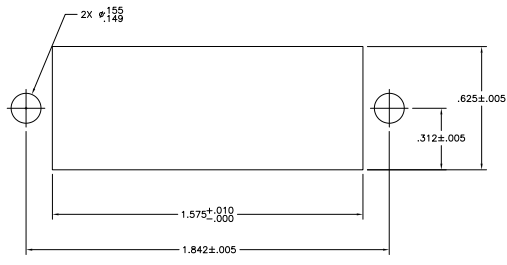


SUGGESTED REAR PANEL MOUNTING CUTOUT DIMENSION

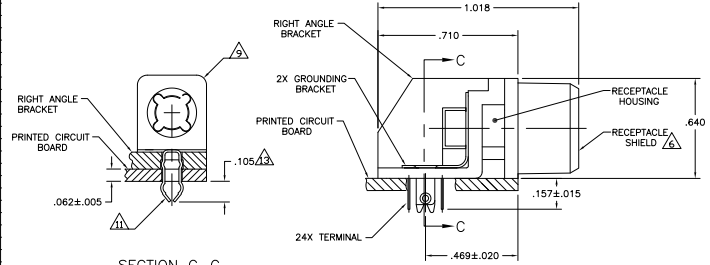


REAR PANEL MOUNTING DETAIL SHOWN FOR REFERENCE ONLY

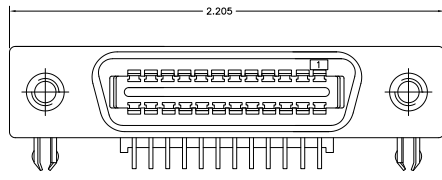


DETAIL A REVERSE ORIENTATION



DETAIL D STANDARD ORIENTATION



DETAIL B



- △ MATERIAL: HOUSING, BRACKET, ADAPTER COMB & TERMINAL SUPPORT PLATE - POLYESTER, BLACK. RECEPTACLE SHIELD - BRIGHT NICKEL OVER COPPER PLATED DIE CASTING.
- TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .00030 MIN GOLD PLATE OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, .00030 MIN TOTAL ON MATING SURFACE, .000120 MIN TIN PLATE ON TAILS. ALL OVER .00050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
- GROUND BRACKET - TIN PLATED CARBON STEEL.
- 2. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH CENTRAL LUBRICANT.
- 3. CENTER TO CENTER SPACING OF TERMINALS IS 0.85 NOMINAL.
- △ ALL DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- △ DETAILS "A" & "D" ARE VIEWED FROM MATING SIDE OF THE RECEPTACLE ASSEMBLY.
- △ SHIELD IS ASSEMBLED TO RECEPTACLE BEFORE SHIPMENT.
- △ TERMINAL 1 IS LOCATED IN THIS ROW FOR REVERSE ORIENTATION, SEE DETAIL A.
- 8. PANEL THICKNESS RANGE 1 .062 MAXIMUM.
- △ GROUNDING BRACKET RETAINS CONNECTOR IN .062 THICK PC BOARD WITHOUT ADDITIONAL HARDWARE.
- △ IF TERMINALS DO NOT EXTEND BELOW COMB, THEN COMB SHALL BE PARTIALLY RETRACTED, BEFORE INSERTING CONNECTOR INTO THE PC BOARD.
- △ GROUNDING BRACKET LOCATES CONNECTOR FLUSH WITH TOP OF PC BOARD AND SPRING LOCKS BENEATH.
- △ CYLINDRICAL SHAPE OFFERS 180° OF SOLDERING SURFACE.
- △ SURFACE AREA OF GROUNDING BRACKET BELOW PC BOARD SHALL PASS SOLDERABILITY REQUIREMENTS IN ACCORDANCE WITH AMP SPECIFICATION 109-11-2. DISCOLORATION, SCRATCHES, SPOTS AND OTHER COSMETIC DEFICIENCIES TYPICAL OF BARREL PLATING PROCESS ARE ACCEPTABLE PROVIDED PARTS PASS 24 HOUR EXPOSURE AT 95% RH AT 40°C, WITHOUT EVIDENCE OF CORROSION.
- △ TERMINAL 1 LOCATED IN THIS ROW FOR STANDARD ORIENTATION, SEE DETAIL D.

D	STANDARD	5554923-2
A	REVERSE	5554923-1
SEE DETAIL	ORIENTATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	BY	CHK	APP
INCHES	UNLESS OTHERWISE SPECIFIED	0				
FRAMES		1				
ASSEMBLY		2				
TESTING		3				
REVISIONS		4				
DATE	DATE	DATE	DATE	DATE	DATE	DATE
CUSTOMER DRAWING		REV	DATE	BY	CHK	APP
		0				
		1				