
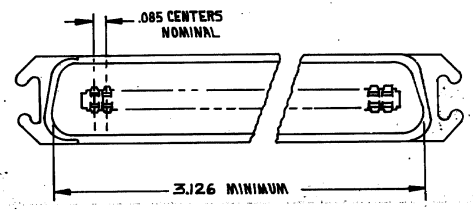
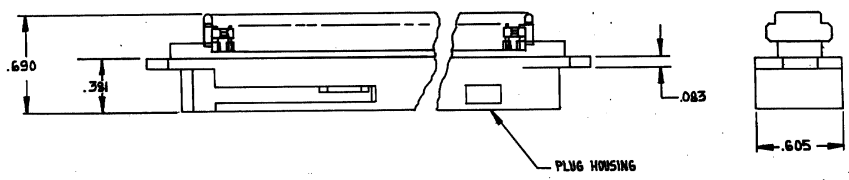


THIS DRAWING IS UNPUBLISHED. RELEASING FOR PUBLICATION. COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC	DIST	ZONE	LTR	DESCRIPTION	DATE	APPD
AA	20			RLSD NPI C88-49	4-27-88	

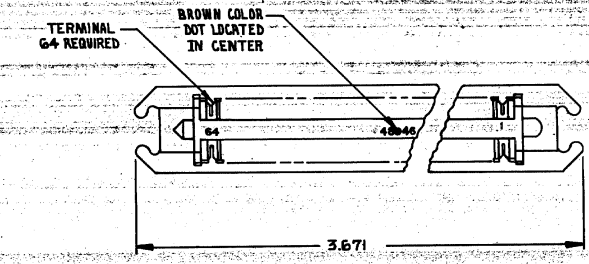

1. THE CONTACT SURFACES OF TERMINALS ARE COATED WITH LUBRICANT.
 2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
 3. MATERIAL: HOUSING - POLYPHENYLENE OXIDE, BLACK. TERMINALS - D10 THICK PHOS BRONZE PLATED WITH .0000275 MINIMUM GOLD IN LOCALIZED GOLD PLATE AREA OVER .000050 MINIMUM THICK NICKEL UNDERPLATE.
 4. WIRE SIZE: 22 AWG. SOLID OR STRANDED COPPER CONDUCTORS. INSULATION DIAMETER OF .045-.056 IS ACCEPTABLE FOR MOST APPLICATIONS.
- SEE PRODUCT SPECIFICATION 100-6085 FOR PERFORMANCE SPECIFICATION.
- 100 ASSEMBLIES BULK PACKED IN ANTISTATIC MATERIAL.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DR <i>Harold Woodhill 4-27-88</i>		AMP 555753 - 1	
TOLERANCES OF		CHK <i>A.P. Clark 5-11-88</i>		PACKAGED PART NO	
2 PL DEC ±		APPD <i>E. March 5-16-88</i>		AMP INCORPORATED	
3 PL DEC ±		APPD <i>H. Seguin 5-16-88</i>		Harrisburg, Pa. 17105	
ANGLES ±		PRODUCT/SPEC		NAME	
MATERIAL		APPLICATION SPEC		PLUG ASSEMBLY, 64 POSITION, F SLOT, BAIL LOCK, CHAMP-LOK®	
FINISH		SIZE		FSCM NO	
		C		00779	
		WEIGHT		DRAWING NO	
				555753	
		SCALE		SHEET	
		2:1		1 OF 1	

CUSTOMER DRAWING

555753