

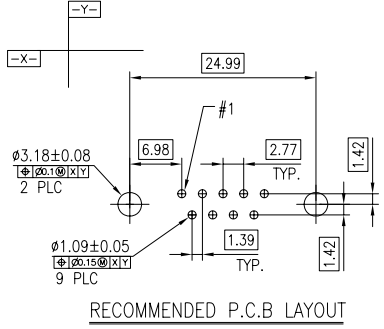
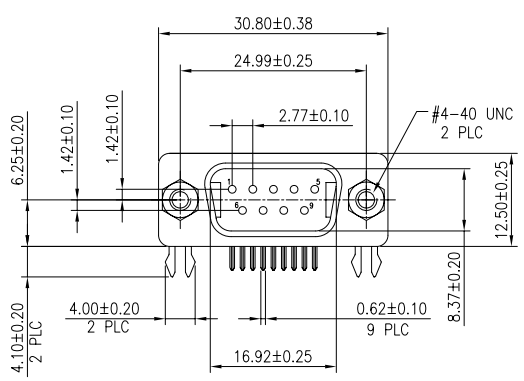



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD
A		REVISED (ECR-08-030152, ECR-09-000777)	13JAN09	SC	WK

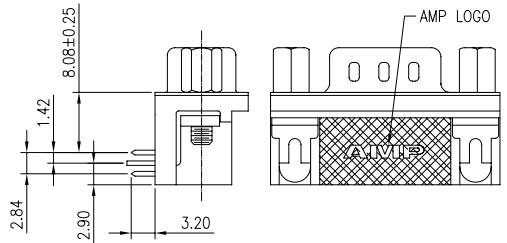

- NOTES:
- MATERIAL :
 - HOUSING: THERMOPLASTIC, UL 94V-0 RATED, BLACK
 - CONTACTS: BRASS
 - SHELL: SPCG
 - BOARDLOCKS: BRASS
 - RIVET: COPPER ALLOY
 - SCREWLOCKS: COPPER ALLOY BRASS, THREAD LENGTH OF SCREW: 6.0 MIN.
 - FINISH:
 - CONTACT:
 - GOLD PLATING ON CONTACT AREA (SEE TABLE)
 - 100u" MIN. MATTE TIN PLATING ON SOLDER TAIL AREA, 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - BOARDLOCK:
 - 100u" MIN MATTE TIN PLATING
 - 50u" MIN NICKEL UNDERPLATING OVERALL.
 - SHELL: NICKEL PLATED
 - RIVET: NICKEL PLATING OVERALL
 - RECOMMENDED PCB THICKNESS: 1.6 mm
 - WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109-202, CONDITION B.
 - THREADED INSERTS AND SCREWLOCKS MUST WITHSTAND 6 IN-LBS TORQUE AND 20 LBS PUSH OUT FROM MATING FACE SIDE.

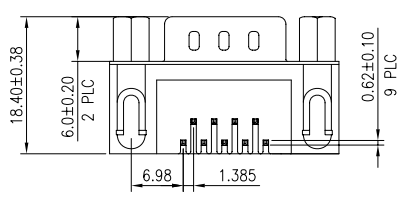


15 u"	1734351-2
G/F	1734351-1
GOLD PLATING	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN S. CHIEN 27NOV2008	Tyco Electronics Corporation Taipei, Taiwan	
DIMENSIONS: MM		CHK S. CHIEN 27NOV2008	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.5 1 PLC ± 0.25 2 PLC ± 0.2 3 PLC ± 0.1 4 PLC ± ANGLES ± 3'		APVD W. KODAMA 27NOV2008	PRODUCT SPEC 108-57541	
MATERIAL SEE NOTE		QUALIFICATION TEST REPORT 501-57623	WEIGHT 9 GRAMS	
FINISH SEE NOTE		SIZE A3		CAGE CODE 00779
		DRAWING NO C=1734351		RESTRICTED TO
		CUSTOMER DRAWING		SCALE SHEET 1 OF 2 REV A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

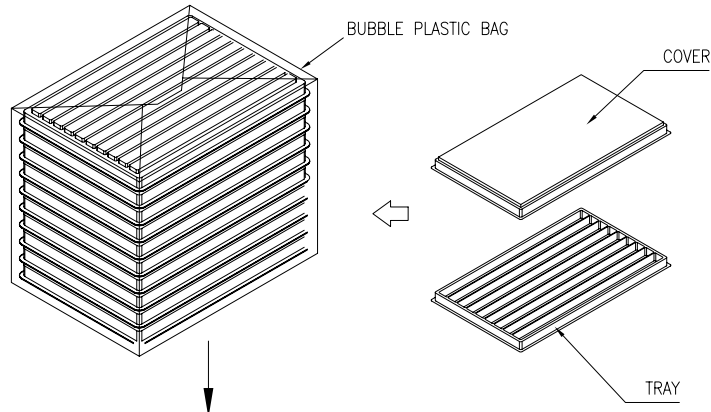

- NOTES:
- MATERIAL:
 - 1.1 TRAY: PVC
 - 1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD
 - DIMENSION:
 - 2.1 TRAY: L=340, W=228, H=17.4
 - 2.2 SHIPPING CARTON: L=440, W=321, H=150
 - QUANTITY:
 - 3.1 PRIMARY PACKING: 90 PCS/TRAY
 - 3.2 SECONDARY PACKING: 11 TRAY/CARTON(990PCS)
 - WEIGHT:
 - 4.1 NET WEIGHT: 8.91 Kg (W/SCREWLOCK)
 - 4.2 GROSS WEIGHT: 9.91 Kg (W/SCREWLOCK)

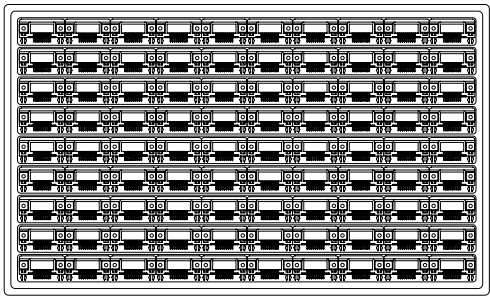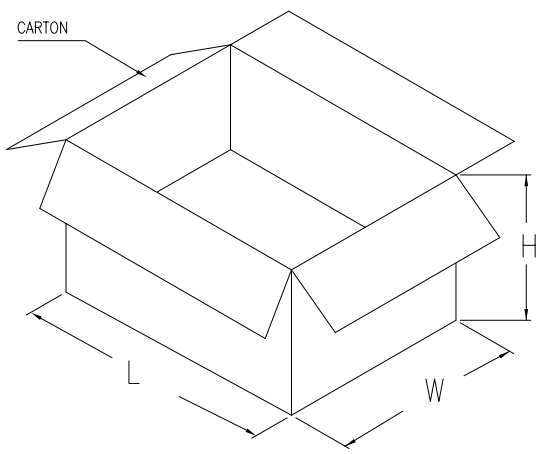

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Corporation Taipei, Taiwan											
DIMENSIONS: MM		CHK	NAME											
<table border="1"> <tr> <td>0 PLC</td> <td>±</td> </tr> <tr> <td>1 PLC</td> <td>±</td> </tr> <tr> <td>2 PLC</td> <td>±</td> </tr> <tr> <td>3 PLC</td> <td>±</td> </tr> <tr> <td>4 SPC ANGLES</td> <td>±</td> </tr> </table>		0 PLC	±	1 PLC	±	2 PLC	±	3 PLC	±	4 SPC ANGLES	±	APVD	PLUG ASSEMBLY, 9 POSN, RIGHT ANGLE, 8.08mm SERIES, AMPLIMITE, WITH SCREWLOCKS	
0 PLC	±													
1 PLC	±													
2 PLC	±													
3 PLC	±													
4 SPC ANGLES	±													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	CAGE CODE										
MATERIAL		APPLICATION SPEC	A3	00779										
FINISH		WEIGHT	DRAWING NO	RESTRICTED TO										
		CUSTOMER DRAWING	C=1734351											
		SCALE	SHEET	REV										
			2 OF 2	A										