





**VL Electronics, Inc.**  
 member of Varitronix International Group  
 3250 Wilshire Blvd., Suite 1901 • Los Angeles • CA 90010  
 Voice: (213) 738-8700 • Fax: (213) 738-5340 • Email: sales@vle.com • Website: www.vle.com

**Varitronix**

LED BACKLIGHT FOR VARITRONIX LCD MODULE  
 LED4G-16265  
 LED04G-16265

FOR MDLS-16265 & MDLS-16265B

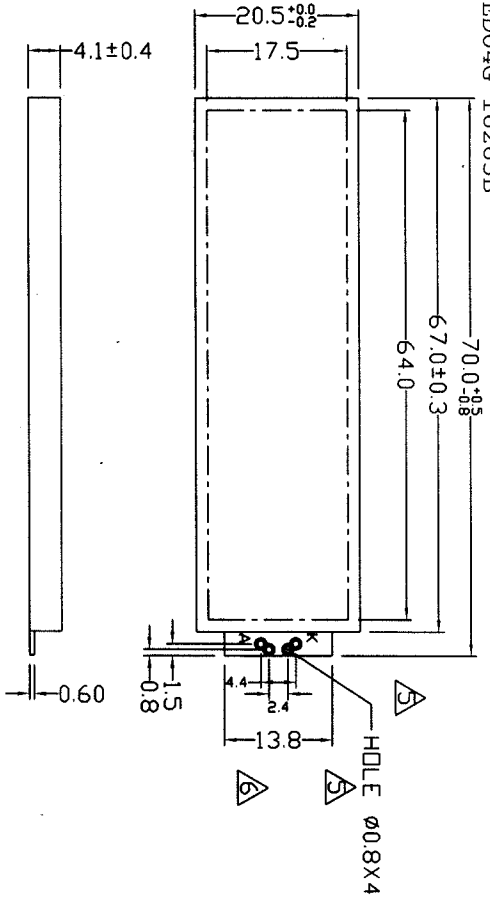

LED COLOR: YELLOW-GREEN

CIRCUIT DIAGRAM LED DICE ( 2X9=18 dies)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
FORWARD VOLTAGE	TEMPERATURE=+25°C FORWARD CURRENT=90mA	3.9	4.1	4.3	V
PEAK WAVE LENGTH	FORWARD CURRENT=90mA		568		nm
LUMINANCE	FORWARD CURRENT=90mA	89	127		cd/m <sup>2</sup>

NOTES:

1. THE LUMINANCE IS THE AVERAGE VALUE OF 9 SAMPLE POINTS AND THE BACKLIGHT UNIFORMITY SHALL BE BETTER THAN 1.5 : 1 THE MEASUREMENT INSTRUMENT IS BM-7 LUMINANCE COLORIMETER THE MEASURING DISTANCE IS 0.35M±5CM AND THE MEASURING FIELD IS 2°.
2. ◇ : SPECIAL CHARACTERISTIC
3. + : SAFETY CHARACTERISTIC
4. ( ) : FOR REFERENCE ONLY
5. ▽ : CRITICAL DIMENSION

ISSUE	AMENDMENT	DATE
△	UPDATE TITLE BOX	980911
△	CHANGE DIMENSION	990524
△	REV'T ORDER AND LUMINANCE MEASUREMENT	020823

TITLE: BACKLIGHT			
PROJECT NO: L16265R1			
TOLERANCE UNLESS OTHERWISE SPECIFIED:	XX ±0.3		
DIMENSIONS IN MM:	XXX ±0.1		
MATERIAL:	FINISH:		
SCALE: DO NOT ON SCALE	THICKNESS:		
THIRD ANGLE PROJECTION			
DRAWN	NAME	SIGN	DATE
CHECKED	HE JIAN WEN		02.08.23
APPROVED	IVAN LAM		
ITEM NO. L.B.L-16265R2-4G3			
DESCRIPTION: L.B.L-16265R2 LED04G			
FILE NO: L.B.L-16265R2-4G3 R6.DWG REV 6			
SHEET 1 OF 1			

**VARITRONIX LIMITED**

LED BACKLIGHT FOR MDLS-16265  
 LED BACKLIGHT FOR MDLS-16265B

VARITRONIX LTD.  
 LED4G-16265