



SLC-22 Series

Features \cdot Viewing angle 2 θ 1/2 : 115°




Specifications

Viewing angle 2 θ 1/2 / 115°: Standard

				Abso	lute Maxim	um Ratings	s (Ta=25°C)			Elec	trical a	and Op	tical Characte	eristics	(Ta=2	5°C)	
Part No.	Chip Structure	Emitting Color	Power Dissipation PD(mW)	Forward Current IF(mA)	Peak Forward Current IFP(mA)	Reverse Voltage VR(V)	Operating Temperature Topr(°C)	Storage Temperature Tstg(°C)	Forward \ Typ.(V)	(oltage VF	Reverse (Max. (μA)	Current IR VR(V)	Dominant Wav λ D Typ.(nm)				nsity Iv IF(mA)
SLC-22VR		Red											630		0.9	2.5	
SLC-22DU	GaAsP on GaP	Orange	60	20	60*	3	-25 to +85	-30 to +100	2.0	10	10	2	605	10	0.56	1.6	10
SLC-22YY		Yellow			00*	3	-25 10 +65	-30 10 +100	2.1	10	10	3	587	10	0.9	2.5	10
SLC-22MG	GaP	Yellowish Green	75	25					2.1				572		0.9	2.5	
		·													*:Di	uty1/5,	200Hz


Dimensions



Recommended Solder Pattern


2.5 or 5.0

Viewing Angle




Electrical Characteristics Curves

Forward Current-Forward Voltage



Luminous Intensity-Atmosphere Temperature


Tolerance : ±0.2 (unit : mm)




Luminous Intensity-Forward Current

(unit : mm)

0±0.1 2.0



Derating



Rank Reference of Brightness

Red (V)

									(Ta=25°C,	IF=10mA)
	Viewing	Brightness Rank	E	F	G	н	J	K	L	М	N
	angle (201/2)	Brightness (mcd) Resin Color	0.40 to 0.63	0.63 to 1.0	1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25
φ3 Cylinder type	115°	Diffused Colored				*SLC	-22VR				

Orange (D)

									(Ta=25°C,	IF=10mA
	Viewing	Brightness Rank	E	F	G	н	J	K	L	М	N
	angle (201/2)	Brightness (mcd) Resin Color	0.40 to 0.63	0.63 to 1.0	1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25
φ3 Cylinder type	115°	Diffused Colored			*SLC	-22DU					

Yellow (Y)


	·								(Ta=25°C,	IF=10mA
	Viewing	Brightness Rank	E	F	G	н	J	K	L	М	N
	angle (201/2)	Brightness (mcd) Resin Color	0.40 to 0.63	0.63 to 1.0	1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25
φ3 Cylinder type	115°	Diffused Colored				*SLC	-22YY				

Green (M)

Green (N	1)								(Ta=25°C,	IF=10mA)
	Viewing	Brightness Rank	E	F	G	н	J	К	L	М	Ν
	angle (201/2)	Brightness (mcd) Resin Color	0.40 to 0.63	0.63 to 1.0	1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25
φ3 Cylinder type	115°	Diffused Colored				*SLC-	22MG				

 $\% Brightness on specification sheet include tolerance of within <math display="inline">\pm$ 10%.

Part No. Construction

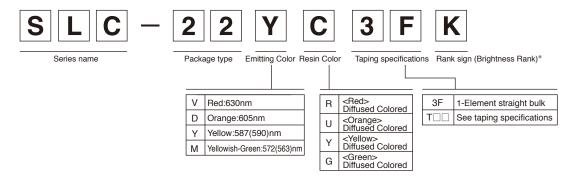

* Concerning the Brightness rank

- Please refer to the rank chart above for luminous intensity classification.
 Part name is individual for each rank.
- · When shipped as sample, the part name will be a representative part name. General products are free of ranks. Please contact sales if rank appointment is needed.

Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) concluded in moisture-proof bags. Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card inside the bag is available upon request. Please contact the nearest sales office or distributer if necessary.

	copying or reproduction of this document, in part or in whole, is permitted without the nsent of ROHM Co.,Ltd.
The	e content specified herein is subject to change for improvement without notice.
"Pr	e content specified herein is for the purpose of introducing ROHM's products (hereinafte oducts"). If you wish to use any such Product, please be sure to refer to the specifications ich can be obtained from ROHM upon request.
illu	amples of application circuits, circuit constants and any other information contained herein strate the standard usage and operations of the Products. The peripheral conditions mus taken into account when designing circuits for mass production.
Ho	eat care was taken in ensuring the accuracy of the information specified in this document wever, should you incur any damage arising from any inaccuracy or misprint of such prmation, ROHM shall bear no responsibility for such damage.
exa imp oth	e technical information specified herein is intended only to show the typical functions of an amples of application circuits for the Products. ROHM does not grant you, explicitly o plicitly, any license to use or exercise intellectual property or other rights held by ROHM and er parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the e of such technical information.
equ	e Products specified in this document are intended to be used with general-use electronic upment or devices (such as audio visual equipment, office-automation equipment, commu ation devices, electronic appliances and amusement devices).
The	e Products specified in this document are not designed to be radiation tolerant.
	ile ROHM always makes efforts to enhance the quality and reliability of its Products, a oduct may fail or malfunction for a variety of reasons.
aga fail sha	ase be sure to implement in your equipment using the Products safety measures to guard ainst the possibility of physical injury, fire or any other damage caused in the event of the ure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM all bear no responsibility whatsoever for your use of any Product outside of the prescribed ope or not in accordance with the instruction manual.
sys ma ins cor of	e Products are not designed or manufactured to be used with any equipment, device o stem which requires an extremely high level of reliability the failure or malfunction of which y result in a direct threat to human life or create a risk of human injury (such as a medica trument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel- ntroller or other safety device). ROHM shall bear no responsibility in any way for use of any the Products for the above special purposes. If a Product is intended to be used for any ch special purpose, please contact a ROHM sales representative before purchasing.
be	rou intend to export or ship overseas any Product or technology specified herein that may controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to tain a license or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/