


REV	INITIALS	DATE	DESCRIPTION
-----	----------	------	-------------

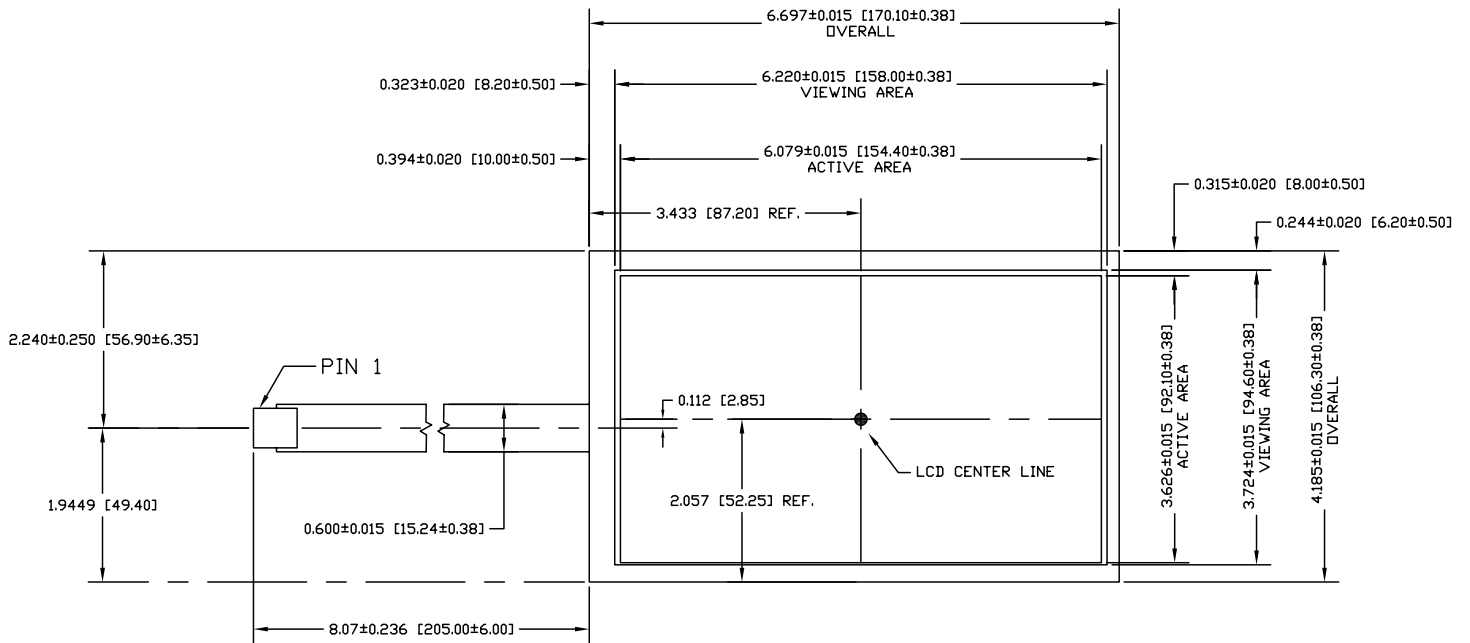

- NOTES: UNLESS OTHERWISE SPECIFIED
- TOUCHSCREEN SPECIFICATIONS PER AUTOMOTIVE GRADE.
  - TOLERANCE  $\pm 0.015$  UNLESS NOTED OTHERWISE.
  - TOP CONDUCTIVE LAYER TO BE  $.007$ " THICK POLYESTER WITH AN ANTI-GLARE COATING.
  - THE CONNECTOR IS LOCATED ON THE LEFT SIDE OF THE PANEL.
  - PIN ONE LOCATION IS THE TOP PIN WHEN VIEWING WITH CABLE TO THE LEFT.
  - PIN OUT AS FOLLOWS:
    - PIN 1 - UPPER RIGHT
    - PIN 2 - LOWER RIGHT
    - PIN 3 - SENSE
    - PIN 4 - UPPER LEFT
    - PIN 5 - LOWER LEFT
  - FFC TAIL IS TERMINATED USING AMP PINS 2-487406-4 AND HOUSING 487378-4 OR EQUIVALENTS.
  - NOMINAL PANEL THICKNESS IS  $.055$ "  $\pm 0.008$  ( $1.40 \pm 0.20$ ).

BERGQUIST TOUCH PRODUCTS			
301 WASHINGTON STREET CANNON FALLS, MN 55009			
TITLE:			
7.0" DIAGONAL 5 WIRE TOUCHSCREEN			
DRN: PEH	DATE: 12/10/07	SCALE: 1:1	TOL: $\pm 0.015$
CHKD: MLR	DATE: 12/14/07	PART NUMBER:	400397
APVD:	DATE:		REV: -