


**MICROSERIES**  
**MRS 24Vuc 1CO**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

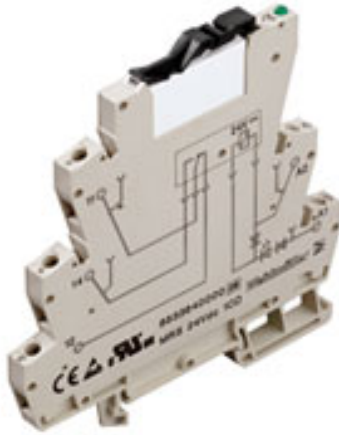

Relays of the MICROSERIES are used for isolating and coupling digital signals.

They are characterised by the following features:

- modular width 6.1 mm
- Pluggable relay
- Pluggable cross-connection for four voltages in input and output circuits,
- innovative retention and ejection aid,
- LED operating indicator, reverse polarity protection diode, free-wheeling diode

**General ordering data**

Order No.	<a href="#">8556050000</a>
Part designation	MRS 24Vuc 1CO
Version	MICROSERIES, Relays, No. of contacts: 1, CO contact, Rated control voltage: 24 V UC ±10 %, Screw connection
GTIN (EAN)	4032248195176
Qty.	10 pc(s).

**MICROSERIES  
MRS 24Vuc 1CO**

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

**Technical data**

**Dimensions**

Length	93 mm	Width	6.1 mm
Height	92 mm		

**Temperature**

Ambient temperature (operational)	-25 °C...+50 °C	Storage temperature	-40 °C...+60 °C
-----------------------------------	-----------------	---------------------	-----------------

**Input**

Rated voltage	300 V	Rated control voltage	24 V UC ±10 %
Response / drop-out voltage AC coil	15.8 V / 7 V	Pull-in (sparkover) / drop-out voltage DC coil	15.8 V / 7 V
Rated current AC	11 mA	Rated current DC	6.4 mA
Pull-in / drop-out current, AC coil	3.6 mA / 1.3 mA	Pull-in / drop-out current, DC coil	3.6mA/1.3mA
Power rating	154 mW	Status indicator	Green LED

**Output**

Continuous current	6 A	Max. switching current	6 A
Max. switching frequency at rated load	0.1 Hz	Switch-off delay	7.5 ms
Switch-on delay	9.3 ms	Switching voltage AC, max.	250 V
making current	6 A	max. switching capacity	1500 VA
min. switching capacity	12 V / 100 mA		

**Contact data**

Contact design	CO contact	No. of contacts	1
Contact material	AgSnO	Mechanical service life	20 x 10 <sup>6</sup> switching cycles

**Rated data**

Conductor connection system	Screw connection	DIN Rail compatibility	TS 35
Humidity	40°C / 93% rel. humidity, no condensation		

**Insulation coordination (EN 50 178)**

Clearance and creepage distances for control/load side	≥ 5.5 mm	Dielectric strength to mounting rail	4 kV <sub>eff</sub> / 1 min.
Impulse withstand voltage	6 kV (1.2/50 μs)	Overvoltage category	III
Pollution severity	2	Protection class	IP 20
Protective separation acc. to VDE 0106 part 101	Yes	Rated voltage	300 V

**Other technical data**

Bridge rectifier	Yes	Free-wheel diode	Yes
Reverse polarity protection	Available	Status indicator	Green LED
Version	Relay coupler		

**Approvals**

Approvals institutes	CSA; CULUS; CURUS; GOSTME25; CE
----------------------	------------------------------------

Creation date November 11, 2010 6:11:48 PM CET

Last update 27.09.2010 / We reserve the right to make technical changes.

**MICROSERIES  
MRS 24Vuc 1CO**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

**Technical data****Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01

**Notes**

Note, technical data                      Cross-connectors and markers - refer to MICROSERIES accessories

**MICROSERIES**  
**MRS 24Vuc 1CO**

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

Drawings

Electric symbol

---

