


DIMENSIONS (mm)

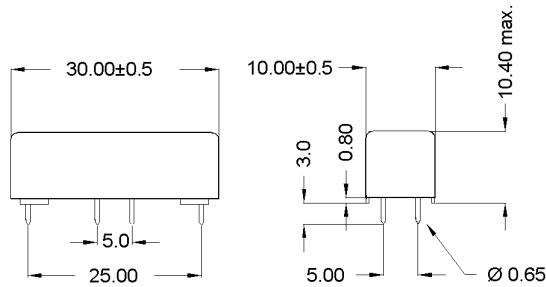


Pins: Ø 0.65 mm
 L = 3.0±0.3 mm
 Material: Cu-alloy tinned


unspecified tolerances acc. to DIN ISO 2768-m

LAYOUT

pitch 2.5 mm/Top view



MARKING



MEDER-Label
 Type/Layout
 Production code,
 EN60062/Factory code

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		612	680	748	Ohm
Coil voltage			12		VDC
Rated power			211		mW
Pull-In voltage				8,4	VDC
Drop-Out voltage		1,8			VDC

Contact Data 85	Conditions	Min	Typ	Max	Unit
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			100	W
Switching voltage	DC or Peak AC			1.000	V
Switching current	DC or Peak AC			1	A
Carry current	DC or Peak AC 100% Duty Cycle			2,5	A
Contact resistance static	Measured with 40% overdrive			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			TOhm
Breakdown voltage (40-50 AT)	according to IEC 255-5	4,2			kV DC
Operate time incl. bounce	measured with 40% overdrive			1,1	ms
Release time	measured with no coil excitation			0,1	ms

Special Product Data	Conditions	Min	Typ	Max	Unit
Number of contacts				1	
Contact - form				A - NO	
Insulation resistance Coil/Contact	RH <45%, 200 VDC test voltage	10			TOhm
Insulation voltage Coil/Contact	according to IEC 255-5	5			kV DC
Housing material				PBT glass fibre reinforced	
Sealing compound				Polyurethan	
Connection pins				Copper alloy tin plated	

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-20		70	°C
Storage temperature		-35		95	°C
Soldering temperature	wave soldering max. 5 sec.				
Cleaning				fully sealed	

Modifications in the sense of technical progress are reserved

Designed at: 05.10.06 Designed by: WKOVACS Approval at: 18.10.06 Approval by: KOLBRICH
 Last Change at: 04.09.09 Last Change by: KSCHIELENSKI Approval at: 04.09.09 Approval by: KOLBRICH

Version: 07