


Panasonic

ideas for life

Both 1 Form A and 1 Form B contacts incorporated in a compact DIP8-pin with low on-resistance

PhotoMOS Relays
HE Form A & B
(AQW654)

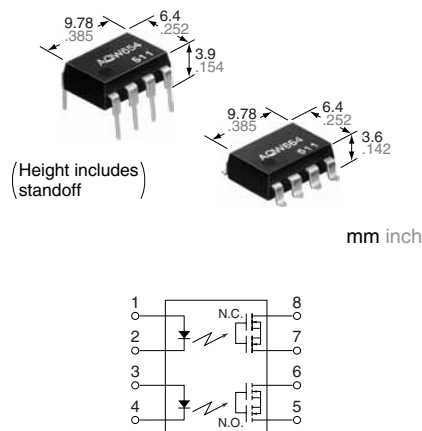

FEATURES

- Applicable for 1 Form A 1 Form B use as well as two independent 1 Form A and 1 Form B use**
- Controls low-level analog signals**
PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- High sensitivity and low on-resistance**
Can control max. 0.16 A load current with 5 mA input current. Low on-resistance of max. 11 Ω .
- Low-level off state leakage current of max. 1 μ A**

TYPICAL APPLICATIONS

- High-speed inspection machines
- Data communication equipment
- Telephone equipment
- Sensing equipment

Compliance with RoHS Directive

TYPES

	Output rating*		Package	Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal			Tube	Tape and reel
	Load voltage	Load current			Tube packing style	Tape and reel packing style			
AC/DC dual use	400 V	120 mA	DIP8-pin	AQW654	AQW654A	AQW654AX	AQW654AZ	1 tube contains: 40 pcs. 1 batch contains: 400 pcs.	1,000 pcs

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the relay.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


	Item	Symbol	AQW654(A)	Remarks
Input	LED forward current	I_F	50 mA	
	LED reverse voltage	V_R	5 V	
	Peak forward current	I_{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW	
Output	Load voltage (peak AC)	V_L	400 V	
	Continuous load current	I_L	0.12A (0.16 A)	Peak AC, DC (): in case of using only 1 channel
	Peak load current	I_{peak}	0.36 A	A connection: 100 ms (1 shot), $V_L = DC$
	Power dissipation	P_{out}	800 mW	
Total power dissipation		P_T	850 mW	
I/O isolation voltage		V_{iso}	1,500 V AC	Between input and output/between contact sets
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F	

HE Form A & B (AQW654)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQW654(A)	Remarks
Input	LED operate current	Typical	I_{Fon} (N.O.)	0.9 mA	$I_L = \text{Max.}$
		Maximum	I_{Foff} (N.C.)	3 mA	
	LED reverse current	Minimum	I_{Foff} (N.O.)	0.4 mA	$I_L = \text{Max.}$
		Typical	I_{Fon} (N.C.)	0.8 mA	
LED dropout voltage	Typical	V_F	1.25 V (1.14 V at $I_F = 5 \text{ mA}$)		$I_F = 50 \text{ mA}$
	Maximum		1.5 V		
Output	On resistance	Typical	R_{on}	11 Ω	$I_F = 5 \text{ mA}$ (N.O.) $I_F = 0 \text{ mA}$ (N.C.) $I_L = \text{Max.}$ Within 1 s on time
		Maximum		16 Ω	
	Off state leakage current	Maximum	I_{Leak}	1 μA	$I_F = 0 \text{ mA}$ (N.O.) $I_F = 5 \text{ mA}$ (N.C.) $V_L = \text{Max.}$
Transfer characteristics	Operate time*	Typical	T_{on} (N.O.)	0.8 ms (N.O.) 1.2 ms (N.C.)	$I_F = 0 \text{ mA} \rightarrow 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum	T_{off} (N.C.)	2 ms	
	Reverse time*	Typical	T_{off} (N.O.)	0.04 ms (N.O.) 0.36 ms (N.C.)	$I_F = 5 \text{ mA} \rightarrow 0 \text{ mA}$ $I_L = \text{Max.}$
		Maximum	T_{on} (N.C.)	1 ms	
	I/O capacitance	Typical	C_{iso}	0.8 pF	
	Maximum	1.5 pF			
Initial I/O isolation resistance	Minimum	R_{iso}	1,000 M Ω		500 V DC

*Operate/Reverse time

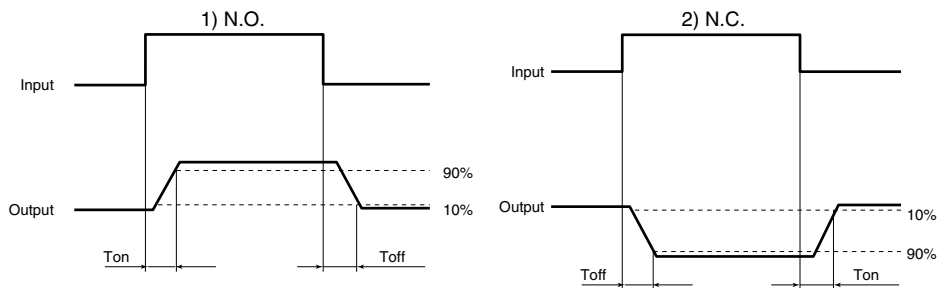

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper relay operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I_F	5	mA

- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Electric Works technical representative.
For more information.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

When using 2 channels




2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)




3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)




4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)




5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)




6. LED reverse current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)




7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

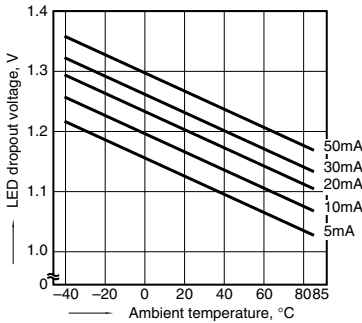


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

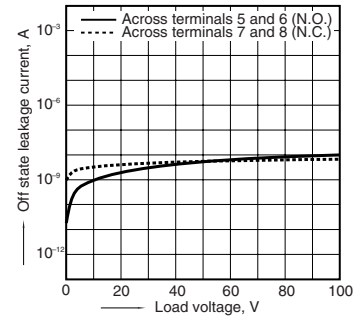


10. Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F



11. Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F



12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

