


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100WCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.
- P/N: 9260CCOLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
- P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
- PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

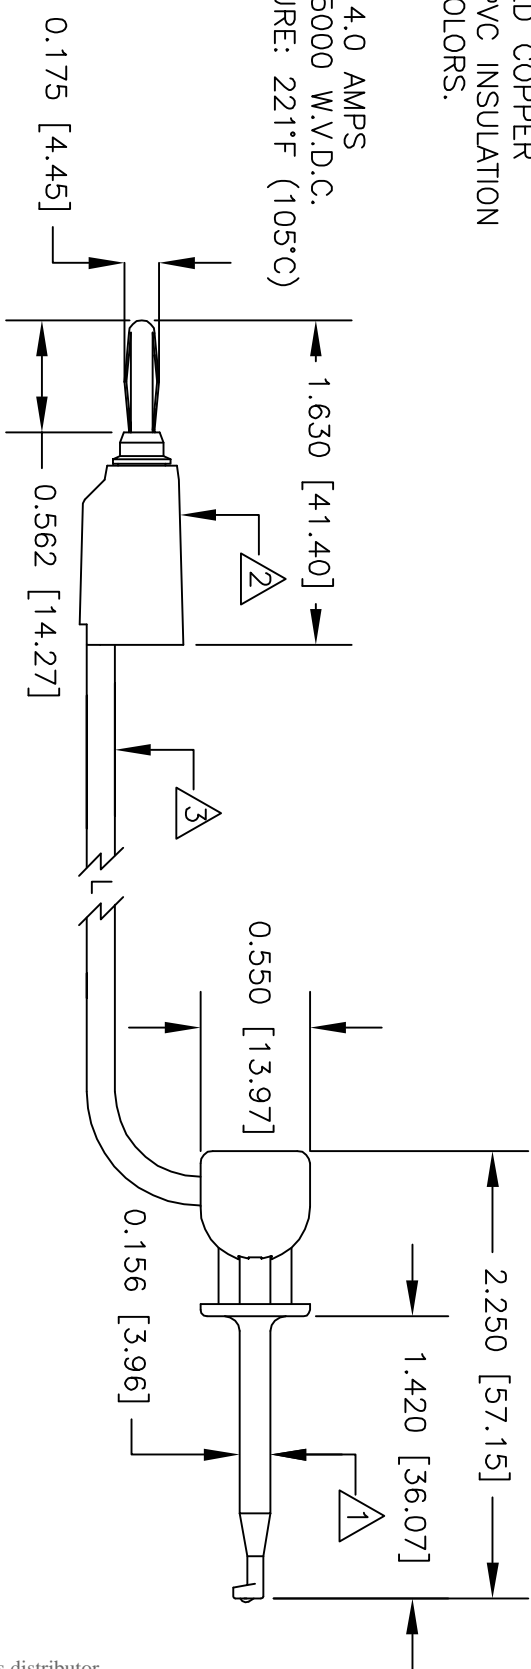

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
±	.XX ±	DRAWN	APPROVALS
±	.XXX ±	R.L.	DATE
MATERIAL SEE NOTE.		APPROVED BY	9/10
FINISH SEE NOTE.		DESCRIPTION	
NEXT ASSY USED ON		MINI-HOOK (X100W) TO	
APPLICATION DO NOT SCALE DRAWING		STK BANANA PLUG (9260)	
		SIZE	CODE IDENT NO. DRAWING NO.
		A	08505 601W
		SCALE	1:1
		SHEET	1 OF 1

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.