

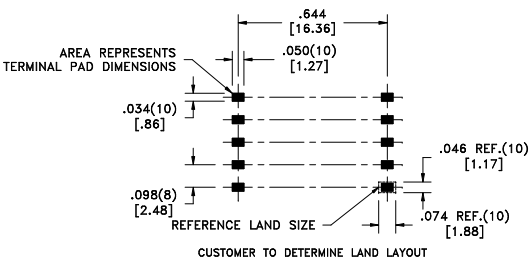



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

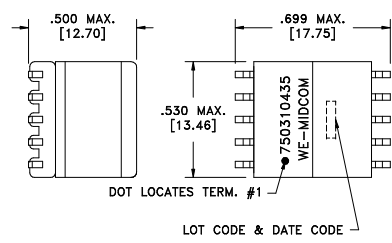

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.096 ohms ±10%
D.C. RESISTANCE	5-2 @20°C	0.092 ohms ±10%
D.C. RESISTANCE	7-8 @20°C	0.050 ohms ±10%
D.C. RESISTANCE	9-10 @20°C	0.050 ohms ±10%
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	36.30uH ±10%
LEAKAGE INDUCTANCE	1-4 tie(5+2, 7+8+9+10), 100kHz, 100mVAC, Ls	0.8uH typ., 1.2uH max.
DIELECTRIC	1-7 tie(4+5, 8+9), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-4):(5-2)	1.83:1, ±1%
URNS RATIO	(1-4):(7-8)	1.57:1, ±1%
URNS RATIO	(1-4):(9-10)	1.57:1, ±1%



GENERAL SPECIFICATIONS:

REV.	DATE
6A	1/09

Packaging Specifications Method: Tape & Reel PKG-0499 www.midcom-inc.com	Unless otherwise specified: Tolerances: Fractions: $\pm 1/64$ Angles: $\pm 1^\circ$ Decimals: $\pm .005 [.127]$	DRAWING TITLE TRANSFORMER	DRAWING NO. 750310435
	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750310435	