


USB A Type Male
Plastic: White

USB A Type Female
Plastic: White

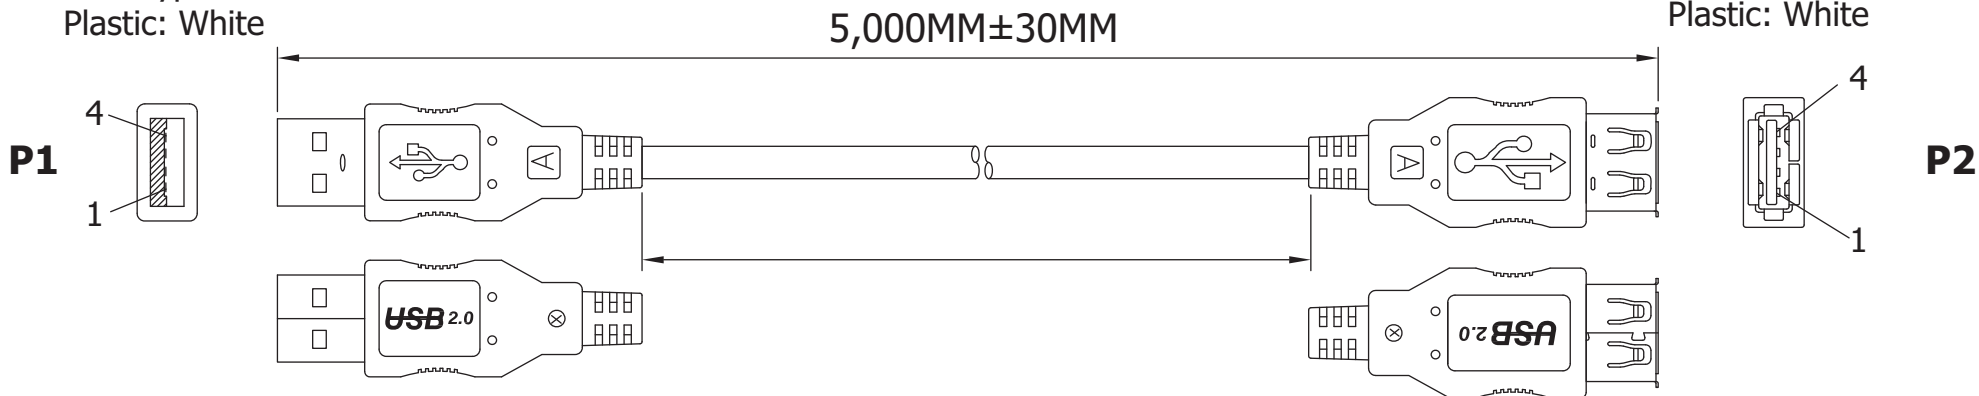

Material:

- Cable: UL2725 [28AWG(7/0.127)*1PR+24AWG(7/0.203)*2C +AL-FOIL/MYLAR+DRAIN WIRE(7/0.127)+65% BRAID]TIN
 - OD 4.7MM±0.15MM
 - PVC Jacket
 - Color Black
- P1 Connector: USB A Type Male
 - Gold Plated 30μ" Contact
 - Nickel Plated Shell
- P2 Connector: USB A Type Female
 - Gold Plated 30μ" Contact
 - Nickel Plated Shell
- Hood: Molded Type, PVC 45P, Color Black
- Tooling Cavity indication for inspection

Electrical:

- 100% Open, Short & Mis Wire Test
- Contact Resistance 3Ω Max.
- Insulation Resistance 20MΩ Max.

PIN OUT					
	P1		P2		
RED	1	—————	1	VCC	
WHITE	2	—————	2	-DATA	
GREEN	3	—————	3	+DATA	
BLACK	4	—————	4	GROUND	
SHELL		————— BRAID ———		SHELL	



ITEM NO.
AK669/2-50-BLACK-R

TITLE
Hi-Speed USB 2.0 Extension cable, 5 Meters,
Black, USB A Male <=> USB A Female

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved