
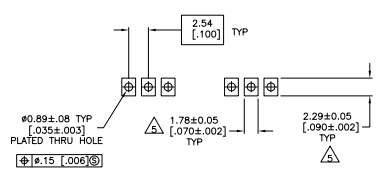
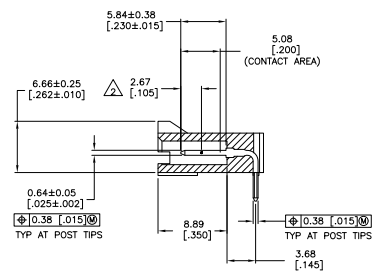
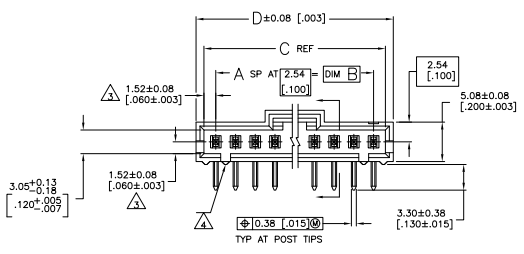


- △ .00076[.000030] GOLD IN THE CONTACT AREA, .00254[.000100]-.00508[.000200] MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .00127[.000050] NICKEL
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ THE NOTED DIMENSIONS APPLY FROM THE BASIC DIMENSION LINE (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED
- △ ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS; ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- △ DIMENSIONS NOTED ARE FOR SOLDER STENCIL LAYOUT FOR USE WITH A 1.57±0.20 [0.062±.008] THICK PRINTED CIRCUIT BOARD
- △ MATERIAL: HOUSING - HIGH TEMPERATURE THERMOPLASTIC
 COLOR: BLACK
 POSTS - BRASS
- △ .00076[.000030] GOLD IN THE CONTACT AREA, .00254[.000100]-.00508[.000200] MATTE TIN ON THE SOLDER TAIL, ALL OVER .00127[.000050] NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

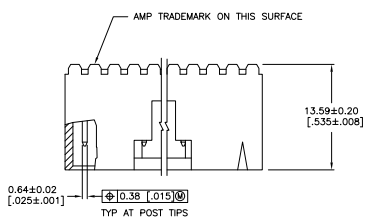

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
 RECOMMENDED STENCIL THICKNESS = 0.25 [0.010]

△	2.600	2.520	2.400	24	25	7-104935-4
△	2.500	2.420	2.300	23	24	7-104935-3
△	2.400	2.320	2.200	22	23	7-104935-2
△	2.300	2.220	2.100	21	22	7-104935-1
△	2.200	2.120	2.000	20	21	7-104935-0
△	2.100	2.020	1.900	19	20	6-104935-9
△	2.000	1.920	1.800	18	19	6-104935-8
△	1.900	1.820	1.700	17	18	6-104935-7
△	1.800	1.720	1.600	16	17	6-104935-6
△	1.700	1.620	1.500	15	16	6-104935-5
△	1.600	1.520	1.400	14	15	6-104935-4
△	1.500	1.420	1.300	13	14	6-104935-3
△	1.400	1.320	1.200	12	13	6-104935-2
△	1.200	1.120	1.000	10	11	6-104935-1
△	1.100	1.020	.900	9	10	6-104935-0
△	1.000	.920	.800	8	9	5-104935-9
△	.800	.720	.600	6	7	5-104935-8
△	.700	.620	.500	5	6	5-104935-7
△	.600	.520	.400	4	5	5-104935-6
△	7.62 [0.300]	5.59 [0.220]	2.54 [0.100]	1	2	5-104935-5
△	33.02 [1.300]	30.99 [1.220]	27.94 [1.100]	11	12	5-104935-4
△	10.16 [0.400]	8.13 [0.320]	5.08 [0.200]	2	3	5-104935-3
△	22.86 [0.900]	20.83 [0.820]	17.78 [0.700]	7	8	5-104935-2
△	12.70 [0.500]	10.67 [0.420]	7.62 [0.300]	3	4	5-104935-1
△	7.62 [0.300]	5.59 [0.220]	2.54 [0.100]	1	2	104935-5
△	33.02 [1.300]	30.99 [1.220]	27.94 [1.100]	11	12	104935-4
△	10.16 [0.400]	8.13 [0.320]	5.08 [0.200]	2	3	104935-3
△	22.86 [0.900]	20.83 [0.820]	17.78 [0.700]	7	8	104935-2
△	12.70 [0.500]	10.67 [0.420]	7.62 [0.300]	3	4	104935-1

△ 8 SUPERSEDED BY 5-104935-1

PLATING	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. THE REVISIONS ARE CONTROLLED BY THE REVISIONS CONTROL UNIT. THE REVISIONS CONTROL UNIT IS RESPONSIBLE FOR THE CONTROL OF THE DRAWING.

TE Connectivity
 HEADER ASSY, AMPMODU MTE, RIGHT ANGLE, SINGLE ROW, 100CL, .025 SQ POSTS, WITH LATCH

SIZE: 4.1
 DRAWING NO: A100779
 CUSTOMER DRAWING: G=104935