
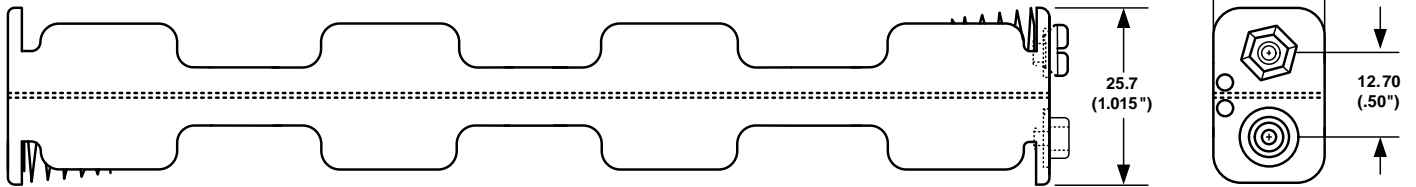


ORDERING CODE BH16AA

SOLDER LUGS = L
 (6") WIRE LEADS = W
 9 VOLT TYPE SNAPS =SF


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
9/10/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
1/12/08	B	RANGE WAS "RANGEE"	T.B.	B.S.	

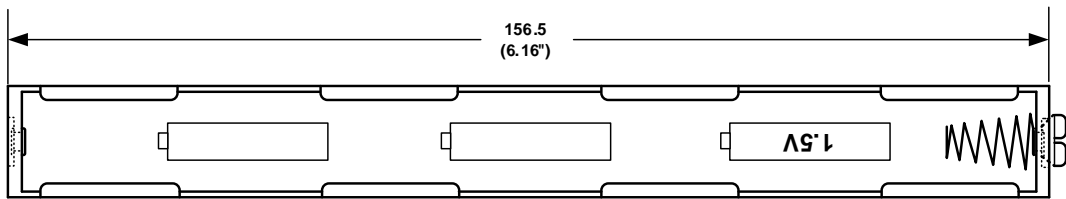

Note: Dimensions in mm. (inches)

SPECIFICATIONS :

Plastic material - polypropylene
 Flammability Rating-UL94 HB, UL File No. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel
 Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")	SCALE NONE	DRAWN BY B.S.	APPROVED BY
FRACTIONAL + .8 (.030") - .8 (.030")	TITLE SIX "AA" CELL HOLDER		
ANGULAR + 3° - 3°	DATE 1/12/2008	DRAWING NUMBER BH16AASF	