



VY Wide Temperature Range series

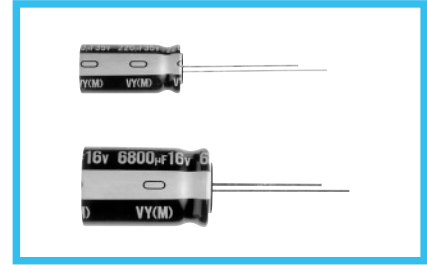


- One rank smaller case sizes than VZ series.
- Compliant to the RoHS directive (2002/95/EC).



Specifications

| Item | Performance Characteristics | |
|-------------------------------|---|---|
| Category Temperature Range | -55 to +105°C (6.3 to 100V), -40 to +105°C (160 to 400V), -25 to +105°C (450V) | |
| Rated Voltage Range | 6.3 to 450V | |
| Rated Capacitance Range | 0.1 to 68000μF | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | |
| Leakage Current | Rated voltage (V) | 6.3 to 100 |
| | | <p>After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.</p> <p>After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.</p> |
| Tangent of loss angle (tan δ) | Rated voltage (V) | 160 to 450 |
| | | <p>After 1 minute's application of rated voltage, CV ≤ 1000: I = 0.1CV + 40 (μA) or less</p> <p>After 1 minute's application of rated voltage, CV > 1000: I = 0.04CV + 100 (μA) or less</p> |
| Stability at Low Temperature | For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. Measurement frequency: 120Hz, Temperature: 20°C | |
| | Rated voltage (V) | 6.3 10 16 25 35 50 63 100 160 to 250 350 to 450 |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C. | |
| | Capacitance change | tan δ |
| Shelf Life | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. | |
| | Printed with white color letter on black sleeve. | |

Radial Lead Type

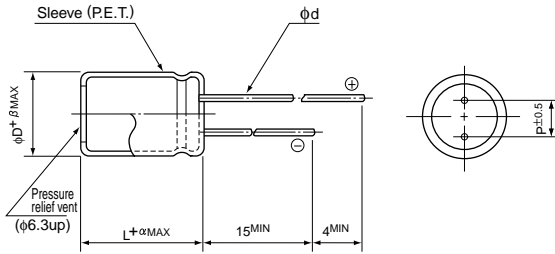


(mm)

| φD | 5 | 6.3 | 8 | 10 | 12.5 | 16 | 18 | 20 | 22 | 25 |
|----|-----|-----|-----|-----|------|-----|-----|------|------|------|
| P | 2.0 | 2.5 | 3.5 | 5.0 | 5.0 | 7.5 | 7.5 | 10.0 | 10.0 | 12.5 |
| φd | 0.5 | 0.5 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 | 1.0 | 1.0 | 1.0 |
| β | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.0 | 1.0 |

| | |
|---|--------------|
| α | (L < 20) 1.5 |
| | (L ≥ 20) 2.0 |

- Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 10V 330μF)

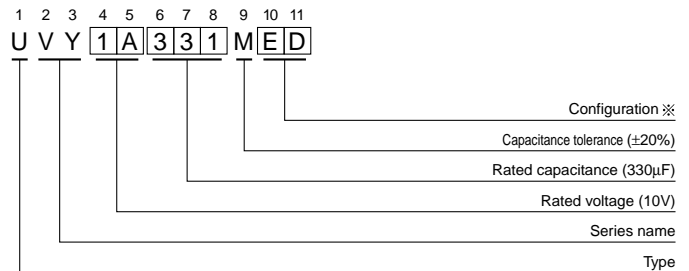

※ Configuration

| φ D | Pb-free leadwire Pb-free PET sleeve |
|------------|--|
| 5 | DD |
| 6.3 | ED |
| 8 · 10 | PD |
| 12.5 to 18 | HD |
| 20 to 25 | RD |

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

• Dimension table in next page.



Dimensions

| Cap.(μ F) | V Code | 6.3 | | 10 | | 16 | | 25 | | 35 | | 50 | | 63 | |
|----------------|-----------|----------------|--|----------------|--|----------------|--|----------------|--|----------------|-----------|----|----------------|----------------|--------------|
| | | 0J | | 1A | | 1C | | 1E | | 1V | | 1H | | 1J | |
| 0.1 | 0R1 | | | | | | | | | | | | 5 × 11 | 1.3 | |
| 0.22 | R22 | | | | | | | | | | | | 5 × 11 | 2.9 | |
| 0.33 | R33 | | | | | | | | | | | | 5 × 11 | 4.3 | |
| 0.47 | R47 | | | | | | | | | | | | 5 × 11 | 7 | |
| 1 | 010 | | | | | | | | | | | | 5 × 11 | 13 | |
| 2.2 | 2R2 | | | | | | | | | | | | 5 × 11 | 20 | |
| 3.3 | 3R3 | | | | | | | | | | | | 5 × 11 | 25 | |
| 4.7 | 4R7 | | | | | | | | | | | | 5 × 11 | 30 | |
| 10 | 100 | | | | | | | | | | | | 5 × 11 | 46 | |
| 22 | 220 | | | | | | | | | | | | 5 × 11 | 68 | 5 × 11 71 |
| 33 | 330 | | | | | | | | | | | | 5 × 11 | 90 | 6.3 × 11 100 |
| 47 | 470 | | | | | | | | | | 5 × 11 93 | | 6.3 × 11 115 | 6.3 × 11 120 | |
| 68 | 680 | | | | | | | | | 6.3 × 11 110 | | | 6.3 × 11 150 | 8 × 11.5 155 | |
| 100 | 101 | | | | | | | 5 × 11 125 | | 6.3 × 11 150 | | | 8 × 11.5 190 | 8 × 11.5 200 | |
| 220 | 221 | | | 5 × 11 155 | | 6.3 × 11 190 | | 6.3 × 11 200 | | 8 × 11.5 250 | | | 10 × 12.5 300 | 10 × 16 335 | |
| 330 | 331 | | | 6.3 × 11 210 | | 6.3 × 11 225 | | 8 × 11.5 275 | | 10 × 12.5 350 | | | 10 × 16 410 | 10 × 20 510 | |
| 470 | 471 | | | 6.3 × 11 250 | | 8 × 11.5 315 | | 10 × 12.5 380 | | 10 × 16 460 | | | 10 × 20 540 | 12.5 × 20 640 | |
| 1000 | 102 | 8 × 11.5 390 | | 10 × 12.5 460 | | 10 × 12.5 500 | | 10 × 16 610 | | 12.5 × 20 810 | | | 12.5 × 25 950 | 16 × 25 930 | |
| 2200 | 222 | 10 × 16 635 | | 10 × 16 705 | | 10 × 20 710 | | 12.5 × 25 1090 | | 16 × 25 1260 | | | 16 × 31.5 1410 | 18 × 35.5 1650 | |
| 3300 | 332 | 10 × 20 840 | | 12.5 × 20 1000 | | 12.5 × 25 1170 | | 16 × 25 1400 | | 16 × 31.5 1500 | | | 18 × 35.5 1770 | 20 × 40 1950 | |
| 4700 | 472 | 12.5 × 20 1090 | | 12.5 × 25 1260 | | 16 × 25 1500 | | 16 × 25 1570 | | 16 × 35.5 1780 | | | 20 × 40 2100 | 22 × 50 2450 | |
| 6800 | 682 | 12.5 × 25 1350 | | 16 × 25 1570 | | 16 × 25 1600 | | 16 × 35.5 1850 | | 18 × 40 2000 | | | 22 × 50 2500 | 25 × 50 2800 | |
| 10000 | 103 | 16 × 25 1650 | | 16 × 31.5 1820 | | 16 × 35.5 1930 | | 18 × 40 2000 | | 22 × 50 2650 | | | 25 × 50 2850 | | |
| 15000 | 153 | 16 × 31.5 1820 | | 16 × 35.5 2050 | | 18 × 40 2210 | | 22 × 50 2750 | | 25 × 50 3100 | | | | | |
| 22000 | 223 | 18 × 35.5 2280 | | 18 × 40 2420 | | 22 × 40 2710 | | 25 × 50 3250 | | | | | | | |
| 33000 | 333 | 20 × 40 2500 | | 22 × 50 3210 | | 25 × 50 3450 | | | | | | | | | |
| 47000 | 473 | 22 × 50 2780 | | 25 × 50 3570 | | | | | | | | | | | |
| 68000 | 683 | 25 × 50 3070 | | | | | | | | | | | | | |

Case size
 ϕ D × L (mm) | Rated
ripple

| Cap.(μ F) | V Code | 100 | | 160 | | 200 | | 250 | | 350 | | 400 | | 450 | |
|----------------|-----------|-----------|------|-----------|------|-----------|-----|-----------|------|-----------|-----|-----------|-----|-----------|-----|
| | | 2A | | 2C | | 2D | | 2E | | 2V | | 2G | | 2W | |
| 0.1 | 0R1 | 5 × 11 | 1.5 | | | 6.3 × 11 | 1.5 | | | | | | | | |
| 0.22 | R22 | 5 × 11 | 3.4 | | | 6.3 × 11 | 3.3 | | | | | | | | |
| 0.33 | R33 | 5 × 11 | 5.0 | | | 6.3 × 11 | 5 | | | | | | | | |
| 0.47 | R47 | 5 × 11 | 7.1 | | | 6.3 × 11 | 11 | | | | | 6.3 × 11 | 8.5 | | |
| 1 | 010 | 5 × 11 | 15 | | | 6.3 × 11 | 16 | | | | | 6.3 × 11 | 14 | | |
| 2.2 | 2R2 | 5 × 11 | 21 | | | 6.3 × 11 | 25 | | | 6.3 × 11 | 21 | 8 × 11.5 | 27 | 8 × 11.5 | 20 |
| 3.3 | 3R3 | 5 × 11 | 29 | | | 6.3 × 11 | 30 | 6.3 × 11 | 28 | 8 × 11.5 | 30 | 8 × 11.5 | 34 | 10 × 12.5 | 28 |
| 4.7 | 4R7 | 5 × 11 | 32 | | | 6.3 × 11 | 35 | 6.3 × 11 | 35 | 8 × 11.5 | 39 | 10 × 12.5 | 42 | 10 × 12.5 | 32 |
| 10 | 100 | 5 × 11 | 50 | 8 × 11.5 | 41 | 8 × 11.5 | 57 | 10 × 12.5 | 71 | 10 × 12.5 | 64 | 10 × 16 | 64 | 10 × 20 | 56 |
| 22 | 220 | 6.3 × 11 | 93 | 10 × 12.5 | 92 | 10 × 16 | 105 | 10 × 20 | 105 | 12.5 × 20 | 105 | 12.5 × 25 | 140 | 12.5 × 25 | 100 |
| 33 | 330 | 8 × 11.5 | 130 | 10 × 16 | 125 | 10 × 20 | 140 | 10 × 20 | 140 | 12.5 × 25 | 170 | 16 × 25 | 170 | 16 × 25 | 125 |
| 47 | 470 | 8 × 11.5 | 140 | 10 × 20 | 150 | 12.5 × 20 | 195 | 12.5 × 20 | 190 | 16 × 25 | 210 | 16 × 25 | 200 | 16 × 31.5 | 155 |
| 68 | 680 | 10 × 12.5 | 190 | 12.5 × 20 | 250 | 12.5 × 25 | 250 | 16 × 25 | 270 | 16 × 25 | 285 | 16 × 31.5 | 240 | 18 × 35.5 | 185 |
| 100 | 101 | 10 × 16 | 240 | 12.5 × 25 | 310 | 16 × 25 | 320 | 16 × 25 | 310 | 18 × 35.5 | 370 | 18 × 35.5 | 310 | 18 × 40 | 200 |
| 220 | 221 | 12.5 × 20 | 390 | 16 × 31.5 | 410 | 16 × 35.5 | 500 | 18 × 35.5 | 485 | 22 × 50 | 540 | 22 × 50 | 460 | 25 × 50 | 250 |
| 330 | 331 | 12.5 × 25 | 540 | 18 × 35.5 | 570 | 18 × 40 | 675 | 20 × 40 | 710 | 25 × 50 | 710 | | | | |
| 470 | 471 | 16 × 25 | 715 | 18 × 40 | 855 | 22 × 40 | 925 | 22 × 50 | 1000 | | | | | | |
| 1000 | 102 | 18 × 35.5 | 960 | 25 × 50 | 1350 | | | | | | | | | | |
| 2200 | 222 | 22 × 50 | 1750 | | | | | | | | | | | | |
| 3300 | 332 | 25 × 50 | 2070 | | | | | | | | | | | | |

Case size
 ϕ D × L (mm) | Rated
ripple

Rated ripple current (mA rms) at 105°C 120Hz

Frequency coefficient of rated ripple current

| V | Cap.(μ F) | Frequency | | | | |
|------------|----------------|-----------|-------|-------|-------|----------------|
| | | 50Hz | 120Hz | 300Hz | 1 kHz | 10 kHz or more |
| 6.3 to 100 | Less than 68 | 0.75 | 1.00 | 1.35 | 1.57 | 2.00 |
| | 100 to 470 | 0.80 | 1.00 | 1.23 | 1.34 | 1.50 |
| | 1000 to 68000 | 0.85 | 1.00 | 1.10 | 1.13 | 1.15 |
| 160 to 450 | 0.1 to 220 | 0.80 | 1.00 | 1.25 | 1.40 | 1.60 |
| | 330 to 1000 | 0.90 | 1.00 | 1.10 | 1.13 | 1.15 |