



**CRYSTEK**  
MICROWAVE  
A DIVISION OF CRYSTEK CORPORATION

# CATTEN-07R0 7dB Attenuator SMA 50 Ohm DC to 3GHz



Actual Size

<b>Temperature Range:</b>	<b>-40°C to +85°C</b>
<b>Rated Power:</b>	<b>1 Watt Max</b>
<b>Freq Range:</b>	<b>DC - 3GHz</b>
<b>VSWR:</b>	<b>1:1.3 Max</b>
<b>Impedance:</b>	<b>50 Ohms</b>
<b>Attenuation Tolerance:</b>	<b>±0.4 dB Typical</b>

The Attenuator offers end users a rugged SMA attenuator housing for easy connection. The CATTEN-07R0 provides 1 Watt of power dissipation. Tolerance matching is used to provide superior temperature tracking to individual components. Attenuator frequency range is from DC to 3GHz.



**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061  
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev: C  
Date: 08-27-08

# CATTEN-07R0


## 7dB Attenuator

### SMA 50 Ohm

### DC to 3GHz

Part Number	Attenuation	Power (Max)
CATTEN-01R0	1 dB	1 Watt
CATTEN-01R5	1.5 dB	1 Watt
CATTEN-02R0	2 dB	1 Watt
CATTEN-03R0	3 dB	1 Watt
CATTEN-04R0	4 dB	1 Watt
CATTEN-05R0	5 dB	1 Watt
CATTEN-06R0	6 dB	1 Watt
CATTEN-07R0	7dB	1 Watt
CATTEN-08R0	8dB	1 Watt
CATTEN-09R0	9dB	1 Watt
CATTEN-0100	10 dB	1 Watt
CATTEN-0150	15 dB	0.5 Watt
CATTEN-0200	20 dB	0.5 Watt

7 dB Data		Return Loss	
Freq. (MHz)	Atten (dB)	Male (dB)	Female (dB)
0.3	7.06	63	62
0.5	7.06	62	62
0.8	7.06	62	62
1.0	7.07	62	61
5.0	7.07	61	61
10.0	7.08	59	59
20.0	7.08	56	56
50.0	7.08	50	51
100.0	7.08	45	45
200.0	7.09	40	40
300.0	7.10	37	36
400.0	7.15	35	34
500.0	7.11	34	32
600.0	7.10	33	31
700.0	7.10	32	30
800.0	7.11	31	28
900.0	7.12	30	28
1000.0	7.13	29	27
1500.0	7.16	25	23
2000.0	7.25	22	21
2500.0	7.30	20	19
3000.0	7.39	18	17

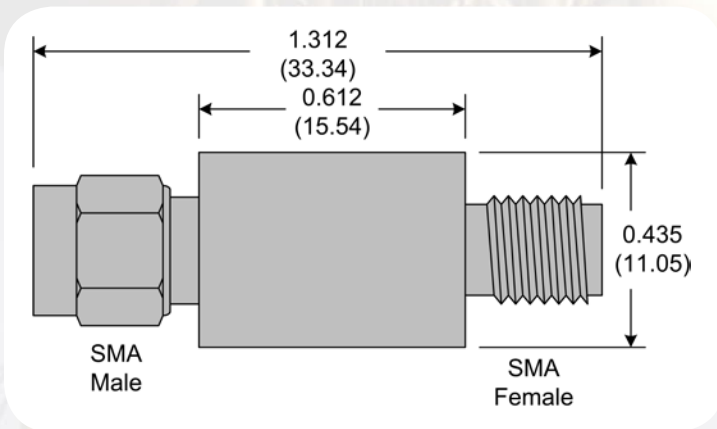

TEST	Condition of Test	Test Results	
		0.5dB to 5dB	6dB to 20dB
Endurance Test at 70°C per EIA 575-3.14	1000 hours at 70°C, 1.5 hrs "ON", 0.5 hrs "OFF"	± 0.2 dB	± 0.3 dB
Overload per EIA 575-3.6	Short time overload	± 0.2 dB	± 0.3 dB
Thermal Shock	per EIA 575-3.5	± 0.2 dB	± 0.3 dB
Moisture Resistance	per EIA 575-3.10	± 0.2 dB	± 0.3 dB
High Temperature Exposure	per EIA 575-3.7	± 0.2 dB	± 0.3 dB
Low Temperature Exposure	per EIA 575-3.12	± 0.2 dB	± 0.3 dB