


# XStream™ OEM RF Modules

900 MHz and 2.4 GHz Embedded RF Modules for OEMs

Embedded RF modules provide outstanding range (up to 20 miles) in a low-cost wireless solution.

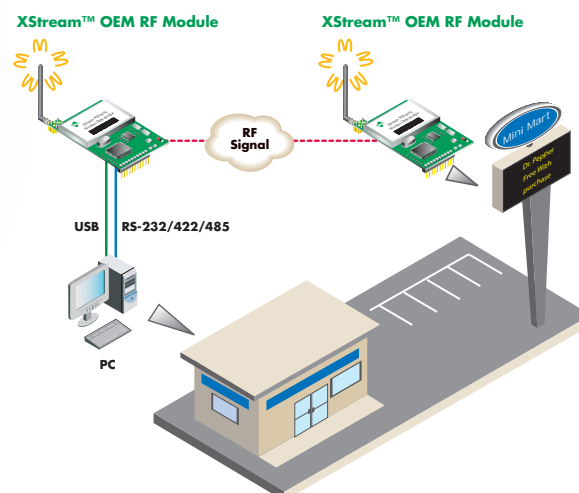

## Features/Benefits

- Indoor/Urban range up to 1500 feet (900 MHz model)
  - Outdoor line-of-sight range up to 20 miles (with high gain antenna)
- 7 frequency hopping channels each with 65K available addresses
- Outstanding receiver sensitivity (-110 dB @ 9600 bps)
- Low-power features for power-sensitive applications
  - Pin, serial port and cyclic sleep modes available
- Performs retries and acknowledgments for reliable packet delivery
- Multiple antenna options (Wire Whip, MMCX, RPSMA)
- Commercial (0° C to 70° C) and Industrial temperature ratings (-40° C to 85° C)

## Overview




Digi's XStream embedded RF modules enable easy and reliable serial wireless connectivity between devices with minimal development out-of-the-box. With 900 MHz and 2.4 GHz configurations, XStream RF modules provide transmission ranges of up to 20 miles in a low-cost wireless solution.

Innovations stamped in their design enable XStream RF modules to yield two- to eight-times the range of competing RF devices. This allows OEMs and integrators to cover more ground with fewer devices, with increased reliability. Additionally, XStream RF modules are easy to use, thereby reducing the complexity of data system development and time to market.

Available in a variety of configurations, including Commercial or Industrial temperature ratings, and multiple antenna variants, XStream RF modules can wirelessly connect a variety of devices across many applications including remote monitoring, building automation/security, industrial automation/SCADA, fleet management/asset tracking and sensor data capture in embedded systems.

## Features/Specifications

Specifications	9XStream™ (900 MHz)	24XStream™ (2.4 GHz)
<b>Performance</b>		
Indoor/Urban Range (w/ 2.1 dB dipole antenna)	Up to 1500 ft (450 m)	Up to 600 ft (180 m)
Outdoor RF Line-of-Sight Range (w/ 2.1 dB dipole antenna)	Up to 7 miles (11 km)	Up to 3 miles (5 km)
Outdoor RF Line-of-Sight Range (w/ high-gain antenna)	Up to 20 miles (32 km)	Up to 10 miles (16 km)
Transmit Power Output	100 mW (20 dBm)	50 mW (17 dBm)
Interface Data Rate (software selectable)	10 - 57600 bps (including non-standard baud rates)	10 - 57600 bps (including non-standard baud rates)
Throughput Data Rate	9,600 bps	19,200 bps
RF Data Rate	10,000 bps	20,000 bps
Receiver Sensitivity	-110 dBm	-102 dBm
<b>Power Requirements</b>		
Supply Voltage	5V (± 0.25V) regulated	5V (± 0.25V) regulated
Receive Current	50 mA	80 mA
Transmit Current	140 mA	150 mA
Power-down Current	< 26 µA	< 26 µA
<b>General</b>		
Dimensions	1.600 in x 2.825 in x 0.350 in (4.06 cm x 7.18 cm x 0.89 cm)	1.600 in x 2.825 in x 0.350 in (4.06 cm x 7.18 cm x 0.89 cm)
Weight	0.8 oz (24 g)	0.8 oz (24 g)
Operating Temperature	0° C to 70° C (commercial) or -40° C to 85° C (industrial)	0° C to 70° C (commercial) or -40° C to 85° C (industrial)
Antenna Options	RPSMA, MMCX or Wire Antenna	RPSMA, MMCX or Wire Antenna
<b>Networking and Security</b>		
Operating Frequency	ISM 902 - 928 MHz	ISM 2.4000 - 2.4835 GHz
Supported Network Topologies	Peer-to-Peer (no master/slave dependencies), Point-to-Point, Point-to-Multipoint, Multidrop	Peer-to-Peer (no master/slave dependencies), Point-to-Point, Point-to-Multipoint, Multidrop
Number of Channels (software selectable)	7 Frequency Hopping Channels	7 Frequency Hopping Channels
Network Filtration Layers	VID, Channel, Destination Address	VID, Channel, Destination Address
<b>Agency Approvals</b>		
FCC Part 15.247	OUR9XSTREAM	OUR-24XSTREAM
Industry Canada (IC)	4214A-9XSTREAM	4214A 12008
Europe	n/a	ETSI

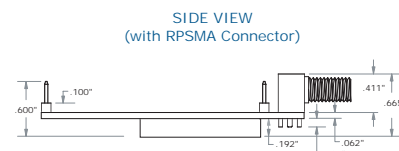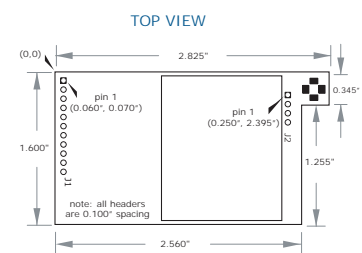

Please visit [www.digi.com](http://www.digi.com) for part numbers.

**DIGI SERVICE AND SUPPORT** - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a one-year warranty. [www.digi.com/support](http://www.digi.com/support)

### Digi International

11001 Bren Road E.  
Minnetonka, MN 55343  
U.S.A.  
PH: 877-912-3444  
952-912-3444  
FX: 952-912-4952  
email: [info@digi.com](mailto:info@digi.com)

### Digi International France

31 rue des Poissonniers  
92200 Neuilly sur Seine  
PH: +33-1-55-61-98-98  
FX: +33-1-55-61-98-99  
[www.digi.fr](http://www.digi.fr)

### Digi International KK

NES Building South 8F  
22-14 Sakuragaoka-cho,  
Shibuya-ku  
Tokyo 150-0031, Japan  
PH: +81-3-5428-0261  
FX: +81-3-5428-0262  
[www.digi-intl.co.jp](http://www.digi-intl.co.jp)

### Digi International (HK) Limited

Suite 1703-05, 17/F,  
K Wah Centre  
191 Java Road  
North Point, Hong Kong  
PH: +852-2833-1008  
FX: +852-2572-9989  
[www.digi.cn](http://www.digi.cn)

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

[www.digi.com](http://www.digi.com)

© 2005-2008 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the When Reliability Matters logo and XStream are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective holders.

**WHEN**  
**RELIABILITY**  
**MATTERS™**

91001415  
A1/208

