THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
AG	1

REVISIONS

LTR	DESCRIPTION	DATE	DWN	APVD
K	REDRAWN ON CAD PER 0330-0026-96	1-8-97	WS	JR



DETAIL A
SCALE 10:1



SCHEMATIC
(POSITION 0)

1. SLOT FOR SCREWDRIVER ACTUATION, AFTER REMOVAL OF TAPE.
2. FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7066 AND INSTRUCTION SHEET 6811.
3. SWITCH BOTTOM IS SEALED.
4. CONTACT FINISH TO BE 0.00076 [.000030] GOLD OVER NICKEL.
5. MATERIAL:
   HOUSING : BLACK POLYESTER
   CONTACTS : BERYLLIUM COPPER.
6. REMOVABLE TAPE TO SEAL ACTUATOR END.

COMMON TO	POSITION 0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1		●			●		●			●			●		●		●
2				●	●			●	●			●	●			●	●
4						●	●	●	●					●	●	●	●
8										●	●	●	●	●	●	●	●
1̄		●		●		●		●		●		●		●		●	
2̄		●	●			●	●			●	●			●	●		
4̄		●	●	●	●					●	●	●	●				
8̄		●	●	●	●	●	●	●	●								

HEXADECIMAL: WITH COMPLEMENT

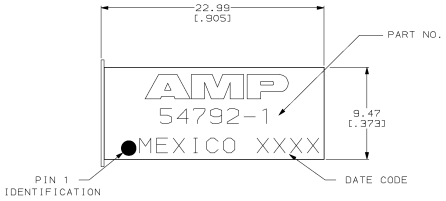



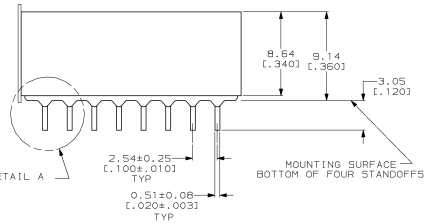

54792-1
PART NUMBER

DRAWN	N. SORAH	1-8-97
CHK	R. TALLEY	1-8-97
APVD	J. DOBB	1-8-97
PRODUCT SPEC	--	
APPLICATION SPEC	--	
WEIGHT	--	

CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608

NAME: SWITCH ASSY, PREPROGRAMMED DIP, 16 POSITION, SCREWDRIVER SLOT

SIZE	CAGE CODE	DRAWING NO
A1	00779	C-54792-1

SCALE 5:1 SHEET 1 OF 1 REV K

Downloaded from Elcodis.com electronic components distributor