




# SERIES KC 1901 SWITCHES

## ROTARY SWITCHES

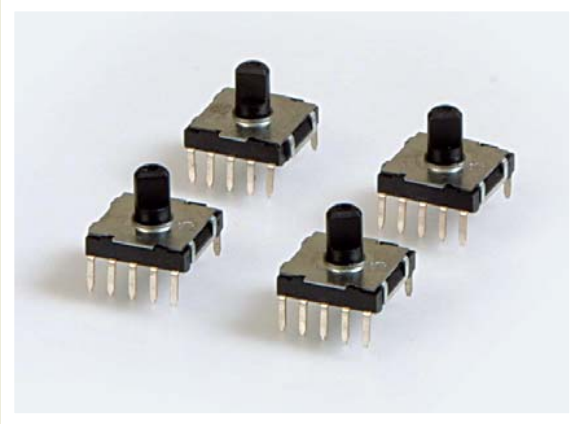

### SPECIFICATIONS

Rating:	100 mA @ 16 VDC
Life Expectancy:	10,000 cycles typical
Contact Resistance:	50 mΩ initial @ 2-4 VDC, 100mA
Dielectric Strength:	1,000 max V rms at sea level
Insulation Resistance:	100 MΩ min.
Operating Force:	0.5 N/cm

### MATERIALS

Cover:	Stainless steel
Contact:	Silver-plated copper alloy
Terminals:	Silver-plated copper alloy

### FEATURES & BENEFITS

- ▶ 9-position rotary
- ▶ Thru-hole termination
- ▶ Positive detents

### APPLICATIONS/MARKETS

- ▶ Industrial controls
- ▶ Test & instrumentation
- ▶ Appliance
- ▶ HVAC



### HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR LENGTH
KC	1901	N = 7.7mm A = 9.8mm





### Example Ordering Number

KC-1901-A


Specifications subject to change without notice.

## KC


1901

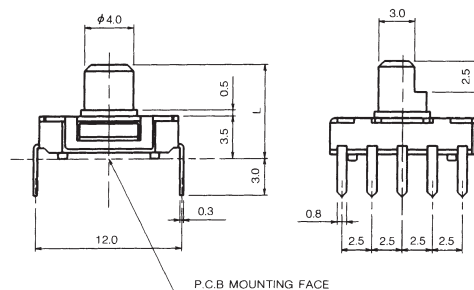

P.C.B MOUNTING FACE

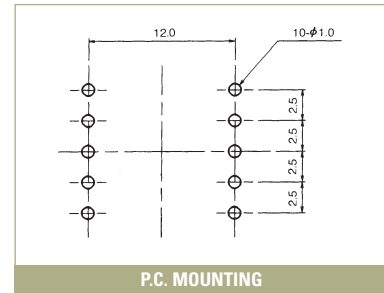

P.C. MOUNTING

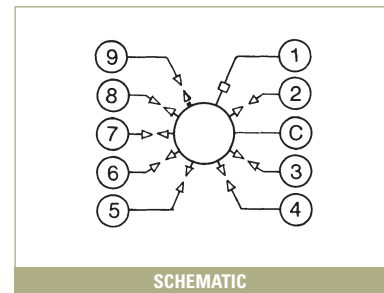

SCHEMATIC