
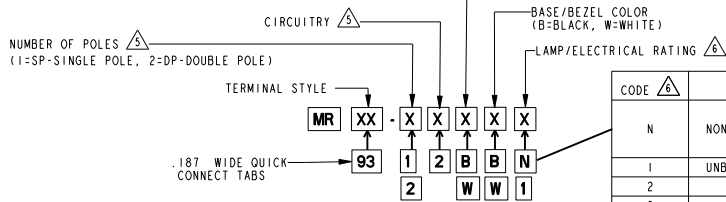




HONEYWELL
PART NUMBER

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|-------------|-------|
| A | 0016254 | KSR 27OCT05 | RJ |

ACTUATOR COLOR (NON-ILLUMINATED: B=BLACK, W=WHITE)
(ILLUMINATED: 1=CLEAR AMBER, 2=CLEAR RED, 3=CLEAR BLUE, 4=CLEAR GREEN, 5=CLEAR)

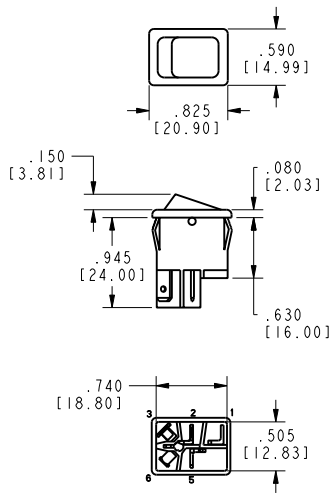

| CODE | LAMP | RATING |
|------|------------------|--|
| N | NON-ILLUMINATED | 8A, 250VAC 12A, 125VAC 1/2 HP, 125-250VAC UL, CSA |
| 1 | UNBALLASTED LED | N/A |
| 2 | 6V LED | 12A, 6V |
| 3 | 12V LED | 12A, 12V |
| 4 | 24V LED | 12A, 24V |
| A | 6V INCANDESCENT | 12A, 6V |
| C | 12V INCANDESCENT | 12A, 12V |
| E | 18V INCANDESCENT | 12A, 18V |
| H | 24V INCANDESCENT | 12A, 24V |
| J | 125V NEON | 12A, 125VAC UL, CSA |
| K | 250V NEON | 8A, 250VAC UL, CSA |

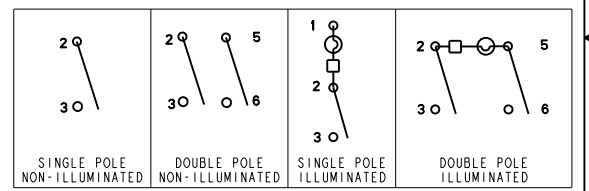

| PANEL THICKNESS | A | B |
|---------------------------|--------------|--------------|
| .030 [.76] - .050 [1.27] | .508 [12.90] | .756 [19.20] |
| .050 [1.27] - .078 [1.98] | .508 [12.90] | .764 [19.40] |
| .078 [1.98] - .125 [3.17] | .508 [12.90] | .780 [19.81] |

- 1 - OPERATING TEMPERATURE RANGE : 32°F TO 185°F
- 2 - ELECTRICAL LIFE : 50,000 CYCLES
- 3 - MECHANICAL LIFE : 100,000 CYCLES
- 4 - SEE DIAGRAM FOR CATALOGING SCHEME
- 5 - REFER TO APPLICABLE CIRCUIT DIAGRAM
- 6 - REFER TO TABLE FOR SPECIFIC LAMPS AND ELECTRICAL RATINGS
- 7 - CLEAR BLUE ACTUATOR ONLY AVAILABLE WITH INCANDESCENT LAMPS

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

| | | | |
|-------------|-------|---|--------|
| NO PLACE | X | ± | 0.040 |
| ONE PLACE | .X | ± | 0.030 |
| TWO PLACE | .XX | ± | 0.015 |
| THREE PLACE | .XXX | ± | 0.005 |
| FOUR PLACE | .XXXX | ± | 0.0005 |
| ANGLES | X | ± | 2 |

DRAWN: NM, 13 JUN 05
 CHECK: RJ, 27OCT05

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

Pro/ENGINEER 2D

Honeywell

TITLE: SWITCH, ROCKER

DRAWING NAME: MR SERIES CHART 1

SIZE: B, TYPE: I, DRAWING NAME: MR SERIES CHART 1, REV: A

SCALE: - SHEET: 1 OF 1

