



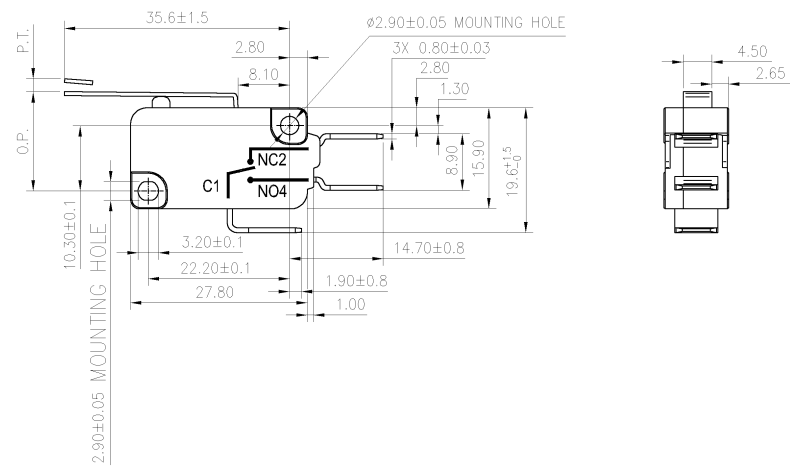


FO-50360-L
HONEYWELL PART NUMBER
V15T16-CZ100A02-K
PRODUCT CODE
CFW2042

REV	DOCUMENT	CHANGED BY	CHECK
A	0038670	VS 10APR08	BLR

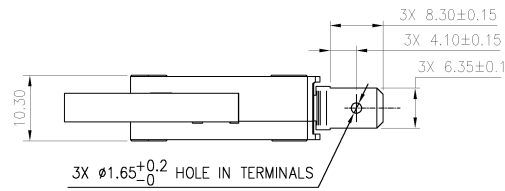

NOTES:  
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

<b>CHARACTERISTICS</b> OPERATING FORCE: 60gf MAX. DIFFERENTIAL FORCE: RELEASE FORCE: 10gf MIN. FREE POSITION: OPERATING POSITION: 15.3±1.5MM. PRE-TRAVEL: 3.2MM MAX. DIFFERENTIAL TRAVEL: 1.2MM MAX. OVER-TRAVEL: 1.3MM MIN. FULL OVERTRAVEL FORCE:	<b>ELECTRICAL DATA</b> CONTACT ARRANGEMENT S.P.D.T  16(4)A 250V~  25T125 µ 5E4 16A 1/2HP 125/250VAC	<b>DESIGN UNITS: MM</b> <b>TOLERANCES UNLESS NOTED:</b> NO PLACE X ± ± ONE PLACE .X ± ± TWO PLACE .XX ± ± 0.40 THREE PLACE .XXX ± ± ANGLES X ± ± 2° THIRD ANGLE PROJECTION 	DRAWN KSR 01APR08 CHECK RJ 01APR08	<b>Honeywell</b> TITLE SWITCH - BASIC	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	SIZE B TYPE I SCALE NTS	CAGE CODE DRAWING NAME V15T16-CZ100A02-K	REV A
			AutoCAD			SHEET 1 OF 1		

4

3

4

2

1