

# 3M

# Damping Foil

## 2552

### Technical Data

#### Product Description

3M™ Damping Foil 2552 consists of a room temperature pressure sensitive viscoelastic polymer on a dead soft aluminum foil and is **designed for application to vibrating panels and support members**. The combination of viscoelastic polymer and an aluminum foil backing (a constrained layer damper, or CLD) has proved to be a unique construction with exceptional ability to control resonant vibrations in the temperature range of 32° to 140°F (0° to 60°C), with survivability from -25° to 175°F (-32° to 80°C).


#### Typical Damping Properties

The high-energy dissipative polymer used in 3M damping foil 2552 can afford excellent control of resonance-induced vibrations. When applied to a vibrating structure, the polymer used in 3M damping foil 2552 converts vibration to negligible heat. Vibration amplitudes and structure-borne noise can be consequentially reduced. The performance of most damping devices is highly dependent on the interaction between the device and the system to which it is applied. A constrained layer control system is no different than a typical damping device and its ability to provide the desired performance is affected by parameters other than temperature and frequency. Namely the geometry, stiffness and the structure to which the control system is applied will affect the performance.

The loss factor of a material is a dynamic property that can define damping performance:

The following data are the results of 3M damping foil 2552 being tested per ASTM E756-83. A sample was applied to a 8.0 inch by 0.5 inch by 0.06 inch steel beam. The beam was tested over a temperature range of -40° to 140°F, in increments of 10°F. Beam modes 2 through 7 were monitored for system damping measurements.

3M™ Damping Foil 2552

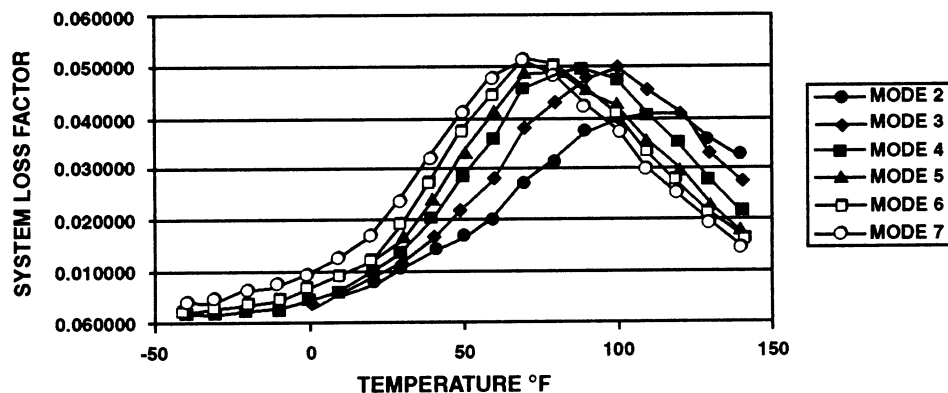


# 3M™ Damping Foil

2552

## Typical Damping Properties (continued)

Test Method: The following data were obtained by doing a frequency sweep from 1 to 100 radians/sec (0.16 to 16 Hz) at 5 different temperatures: -20°, 10°, 0°, 10°, and 22°C. A 3 point bend geometry was used on the Rheometrics RSA II. Time – temperature superposition was used to create the master curve for a reference temperature of 22°C.

### 3M™ Damping Foil 2552 on 18 mil Stainless Steel T = 22°C

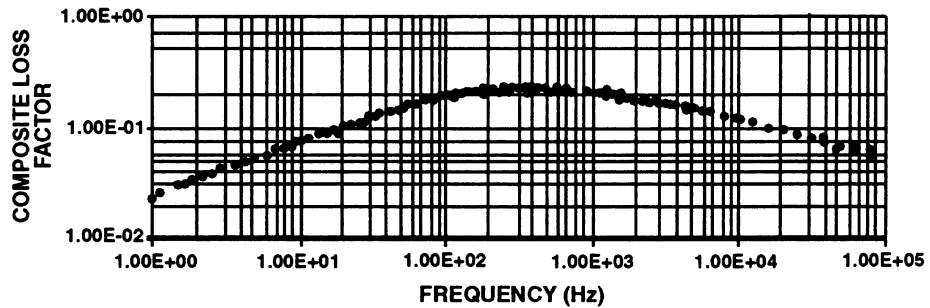

### Data Interpolation:

To determine the damping properties at ambient temperature 72°F (22°C), proceed as follows:

- 1) Locate the desired frequency on the bottom HORIZONTAL scale.
- 2) Follow the chosen frequency up to the point of intersection with the plotted data.
- 3) From this intersect, go left to the vertical scale.
- 4) Read the COMPOSITE LOSS FACTOR for the chosen frequency.

**Note:** Please note that the data has been determined by combining 3M™ Damping Foil 2552 with a panel of 0.018" thick stainless steel with a hardness of T-22 and is presented as a reference to the damping that can be achieved when combined with a material of this description and tested at ambient temperature of 72°F (22°C).

## Solvent and Fuel Resistance

When properly laminated between two impervious materials, the polymer will resist intermittent exposure to mild acids and alkalies, most oils, grease, gasoline, kerosene, JP-4 fuel, hydraulic fluids, and other typical aromatic and aliphatic hydrocarbon and ketone solvents.

**Note:** Continuous submersion in chemical solutions like solvents or fuels is not recommended.

# 3M™ Damping Foil

2552

---

## Product Construction and Typical Physical Properties

**Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.**

		<b>ASTM Test Method</b>
Aluminum Backing:	10.0 mils (0.25 mm)	
Acrylic Viscoelastic Polymer:	5.0 mils (0.13 mm)	
Easy-release Liner:	58# poly-coated paper	
Total Product Thickness:	15.0 mils (0.38 mm)	
Total Product Weight:	0.17 lbs./sq. ft.	
Adhesion to Steel:	65 oz./in. width (72 N/100 mm)	D-3330
Tensile Strength:	126 lbs./in. width (2205 N/100 mm)	D-3759
Elongation at Break:	12%	D-3759
Temperature Use Range:	-25° to 175°F (-32° to 80°C) Peak damping from 32° to 140°F (0° to 60°C)	
Minimum and Maximum Widths:	2 in. minimum, 23.5 in. maximum	
Available Formats:	<b>Roll Lengths:</b> Standard length 36 yds. <ul style="list-style-type: none"><li>• 2" to 4": up to 180 yds.</li><li>• Wider widths available to 180 yds.</li><li>• Dispensers available for purchase through 3M</li></ul> <b>Sheets and Die-Cut parts:</b> 3M can introduce you to fabricators with a background of handling this product and the capability to provide sheet goods and die cut dampers to customer specifications. <b>Custom Dispensers:</b> Designed for manual or automatic operation, this custom dispenser removes protective liner from 3M™ Damping Foil 2552 before cutting to a predetermined length. Built to hold and dispense 6" core with a roll size up to 2" wide by 108 yds. Engineered for table top usage, this custom dispenser measures 31"L x 22"H x 10"W and weighs only 45 pounds.	

---

---

## Characteristics

- Excellent aging qualities of the polymer.
- Wide temperature range for damping. Usable from -25° to 175°F (-32° to 80°C), with peak damping from 32° to 140°F (0° 60°C).
- Liner on product offers the user die-cut capability.
- PSA for ease of application.

---

## Application Ideas

- Industrial applications.
- Electronic equipment and appliances.
- Reduce resonant noise, vibration and fatigue in metal, plastic panels and support structures.
- Almost anywhere plastic or metal contact with materials can result in potentially damaging vibration.

# 3M™ Damping Foil

2552

---

## Product Use

All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

---

## Warranty and Limited Remedy

Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

---

## Limitation of Liability

Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001:2000 standards.



### Industrial Business Industrial Adhesives and Tapes Division

3M Center, Building 21-1W-10, 900 Bush Avenue  
St. Paul, MN 55144-1000  
800-362-3550 • 877-369-2923 (fax)  
www.3M.com/industrial



*Recycled Paper*  
40% pre-consumer  
10% post-consumer

Printed in U.S.A.  
©3M 70-0709-4850-3 (2001/6/05)