


1. THIS RCPT. IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308. EXCEPT AS NOTED HEREIN.
 2. MAX WIRE INSUL TO BE USED WITH THIS RCPT IS .054 DIA
 3. METAL RETENTION CLIPS ARE INCLUDED IN INSERTS
 4. THIS RCPT. WILL ACCEPT SIZE 22 SOCKET CONTACT M 39029/57-354 OR ANY AMP HDD-22 SOCKET CONTACT
- ⚠ UL & CSA DESIGNATION STAMPED ON SHELL, OPTIONAL
 - ⚠ DIALYL PHTHALATE PER MIL-M-14, TYPE SDG-F
 COLOR: BLUE
 OR POLYPHENYLENE SULFIDE(PPS)
 PER MIL-M24519, TYPE GST-40F
 COLOR: BLACK
 - ⚠ STEEL PER ASTM-A-109 OR EQUIVALENT.
 - ⚠ CADMIUM PER QQ-P-416, TYPE II, CLASS 2 OVER COPPER PER MIL-C-14550, CLASS 4.

MILITARY PART NUMBER MARKED (NEAR SIDE)
 MFG'S NAME, BRAND OR LOGO, MFG'S PART NUMBER
 AND DATE CODE MARKED (FAR SIDE)

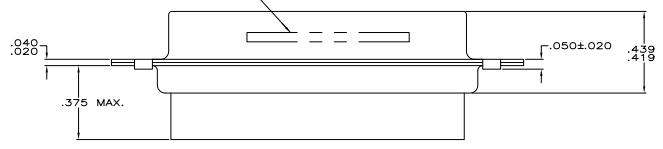

SOCKET CONTACT
 PART NO 204351-1
 QTY 44
 SUPPLIED WITH CONNECTOR
 BUT NOT INSTALLED

INSERTION/EXTRACTION TOOL
 PART NO 91057-1
 SUPPLIED WITH CONNECTOR
 (-3 ONLY)

⚠	⚠	⚠	⚠	M24308/2-19F	M24308/2-19F	204516-3
-	⚠	⚠	⚠	M24308/2-13F	M24308/2-13F	204516-2
REMARKS	INSERT MATERIAL	SHELL MATERIAL	SHELL FINISH	MILITARY PART NO ON PACKAGE	MILITARY PART NO ON PACKAGE	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.				DATE 10-28-10	TE Connectivity	
DIMENSIONS				DATE	KIT HDD SERIES	
REVISIONS				PROJECT	RECEPTACLE SIZE 3(44POS)	
DRAWING				SIZE	DATE	REVISION NO
SEE TABLE				SEE CALCS	A1	00779
CUSTOMER DRAWING				DATE 4-1	REV 1	BY HI