


DESCRIPTION: HIGH DENSITY VERTICAL HIGH PROFILE STAMPED

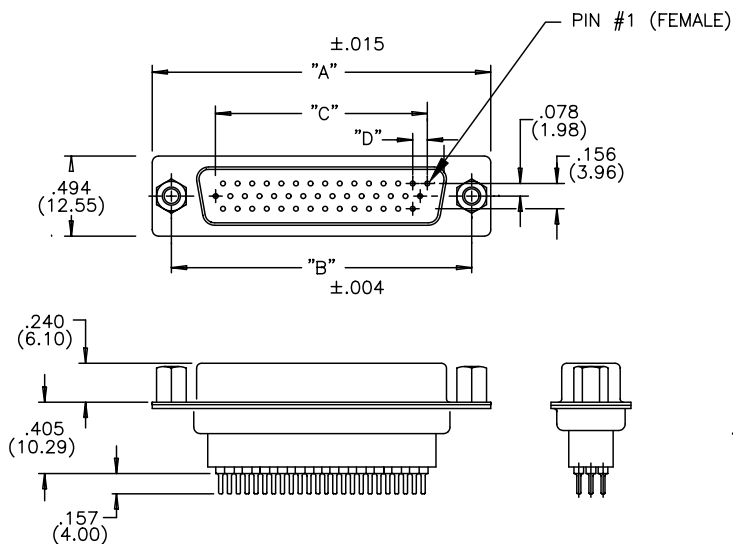

MATERIALS:

INSULATOR: PBT, UL94V-0, 230°C PROCESS TEMP.
CHEMICAL RESISTANCE, COLOR BLACK

SHELL: STEEL, NICKEL PLATED

CONTACT: FEMALE: PHOSPHOR BRONZE
GOLD FLASH IN MATING AREA
TIN PLATING ON TAIL ENDS

RoHS COMPLIANT


ELECTRICAL:

CURRENT RATING: 2 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE:
1000VAC rms AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
CONTACT RESISTANCE: 10 MILLIOHMS MAX.
WORKING TEMPERATURE: -55° TO +125° C

198-XXX-213LXX1


- SERIES _____
- NUMBER OF CONTACTS _____
- GENDER _____
- 2 = FEMALE (NO GROUND INDENTS)
(FEMALE ONLY)
- PC MOUNT _____
- 3 = NICKEL SHELL _____
- HARDWARE OPTIONS: _____
- 00 = .120" MOUNTING HOLE
- 55 = 4-40 INSERTS
- 03 = 4-40 HEX STANDOFFS
- PLATING: _____
- 1 = GOLD FLASH

NUMBER OF CONTACTS	"A"		"B"		"C"		"D"	
	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)
15	1.214	(30.84)	.984	(24.99)	.405	(10.29)	.090	(2.29)
26	1.545	(39.24)	1.312	(33.32)	.765	(19.43)	.090	(2.29)


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 9-15-05
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE:	SHEET 1	OF 1
		DWG NO. 198-XXX-213LXX1		REV 1

DESCRIPTION: HIGH DENSITY DIP SOLDER FEMALE FOOTPRINT


78 POSITION FEMALE

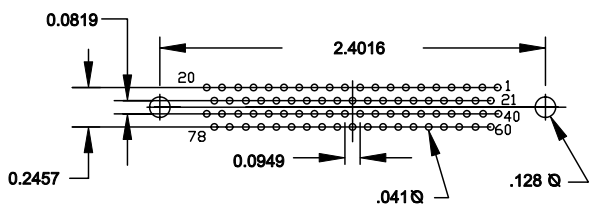


26 POSITION FEMALE

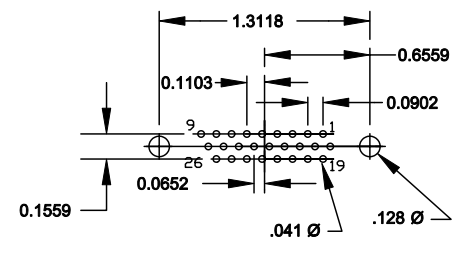


62 POSITION FEMALE

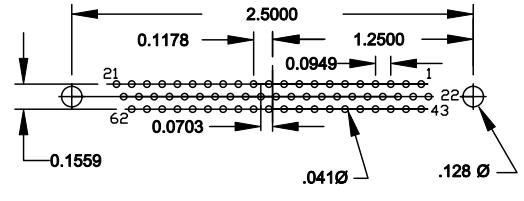


15 POSITION FEMALE

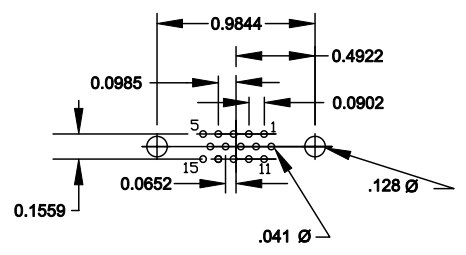

44 POSITION FEMALE

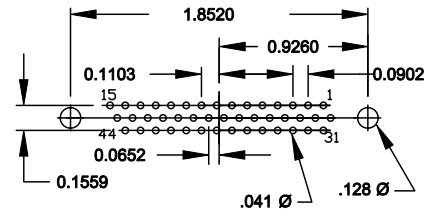

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 10-29-01
			CHECKED:	DATE:
<h1>NorComp</h1>	SCALE:	SHEET 1 OF 1	REV 4	
	DWG NO. HIGH DENSITY VERTICAL FEMALE FOOTPRINT			