
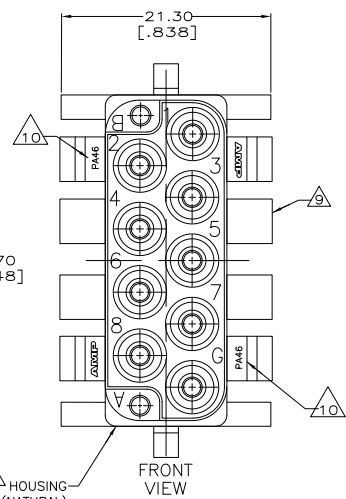
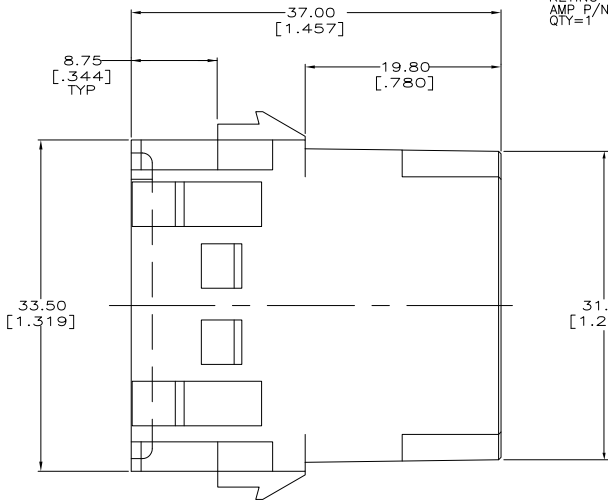
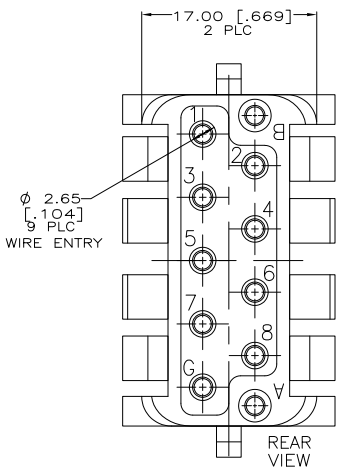
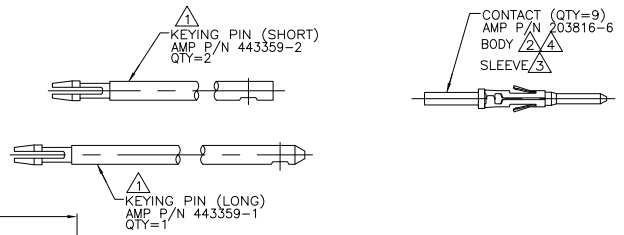



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DF	SO	F	LR	DESCRIPTION	DATE	MIN	APD
		C		REV PER ECO-10-002917	16FEB10	PY	DE

RECOMMENDED KEYING		
OPTION	A	B
#1	LONG	EMPTY
#2	EMPTY	LONG
#3	SHORT	SHORT

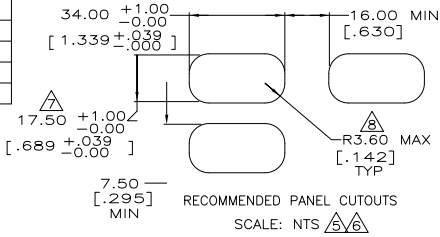

- ▲ MAT'L: 4/6 NYLON UL94V-2 MLDG. CMPD. COLOR: SEE TABLE.
- ▲ MAT'L: BRASS PER ASTM-B-16
- ▲ MAT'L: STAINLESS STEEL PER QQ-S-766
- ▲ FINISH: TIN PLATED PER MIL-T-10727
- ▲ RECOMMENDED PANEL THICKNESS: 1.30-3.20 [ .051-.126 ].
- ▲ RECOMMEND REMOVAL OF SHARP EDGE ON CONNECTOR INSERTION SIDE OF PANEL CUT OUT TO FACILITATE INSERTION OF HOUSING INTO PANEL.
- ▲ TOLERANCE IS  $\begin{smallmatrix} +0.20 \\ -0.00 \end{smallmatrix}$  [ .008 ] FOR PANELS OVER 2.90 [ .114 ] THICK.
- ▲ SQUARED CORNERS ARE ACCEPTABLE.
- ▲ ANTI-VIBRATION TABS MAXIMUM FLEX WIDTH: 22.00 [ .866 ] WITH 3.20 [ .126 ] THICK PANEL.
- ▲ DFE DETAIL SYMBOL (PA46) IS FOR RECYCLING IDENTIFICATION ONLY, NOT A PART NUMBER.



ISOMETRIC VIEW  
 SCALE: NTS

▲ HOUSING  
 AMP P/N 443163-1 (NATURAL)  
 AMP P/N 443163-2 (PALE BLUE)  
 QTY = 1

NATURAL	443160-2
PALE BLUE	443160-1
HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW: C.C.THOMAS 7-27-95	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm		CHK: C.SHELLY 7-27-95	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: C.SHELLY 7-27-95	KIT, RECEPTACLE, 9 POSN., LGH
0 PLC ± .005		PRODUCT SPEC: -	
1 PLC ± .005		APPLICATION SPEC: -	SIZE: A2
2 PLC ± .005		WEIGHT: -	CAGE CODE: 00779
3 PLC ± .005		MATERIAL: -	DRAWING NO: 443160
4 PLC ± .005		FINISH: -	RESTRICTED TO: -
ANGLES ± .005		SEE TABLE	CUSTOMER DRAWING
SCALE: NTS		SCALE: NTS	SHEET 1 of 1
REV: C			