

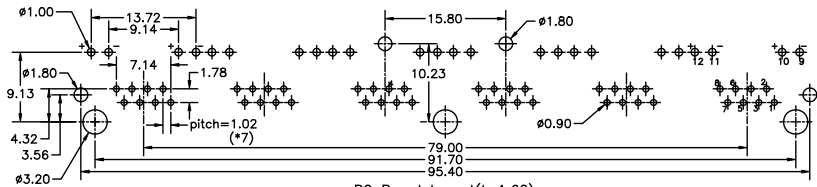


D1RFRD006



| REVISION RECORD | | | | |
|-----------------|-----|----------------|----------|----------|
| REV | ECO | DESCRIPTION | DRFT | CHKD |
| △ | | drawing modify | YANGLIAN | 08/23/05 |

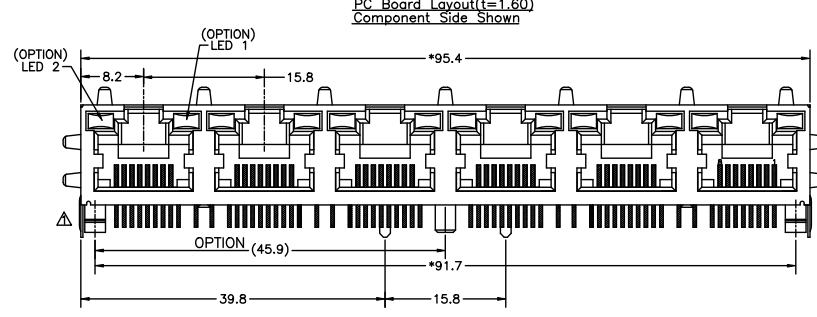

- NOTES:**
- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
 - LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
 - OPERATING: 750 CYCLES MIN.
- MECHANICAL:**
- HOUSING MATERIAL : FR52 UL94V-0. COLOR-BLACK.
 - INSERT MATERIAL : FR52 UL94V-0. COLOR-BLACK.
 - BACK PLATE MATERIAL : FR52 COLOR-BLACK.
 - LED SIZE : 3.2*2.0*7.0*P=2.54mm.
 - SHIELD MATERIAL : COPPER ALLOY 0.25mm THICKNESS PLATING NI.
 - CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS OR Ø0.46.
 - PLATING : GOLD PLATING OVER NICKEL.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO 70°C.
 - WAVE SOLDERING TEMPERATURE: 255~265°C (5~10 SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.CUL FILE No:E163191

- PART NUMBER: E 5J 8 8 - X X X X X - L**
- 1-LED1:GREEN ,LED2:YELLOW
 - 2-LED1:GREEN ,LED2:GREEN
 - 3-LED1:YELLOW ,LED2:GREEN
 - 5-LED1:RED ,LED2:GREEN
 - 7-LED1:YELLOW ,LED2:YELLOW
- 1-NO TAB
2-TOP TABS
3-SIDE TABS
4-TOP TABS & SIDE TABS.
- PLATING: 1-3u", 2-6u", 3-15u", 4-30u", 5-50u"
- 1-PLATE Tin SHIELD STAMP PIN ,No3 ERA LED
 - 2-PLATE Ni SHIELD STAMP PIN ,No3 ERA LED
 - 3-PLATE Tin SHIELD ROUND PIN ,No3 ERA LED
 - 4-PLATE Ni SHIELD ROUND PIN ,No3 ERA LED
 - J-W/O FRE LOGO A05-0130
- 6-6 PORTS W/O MIDDLE POLE
E-6 PORTS W/ MIDDLE POLE

| | | | | | |
|----------------|----------------------------|---------------|---------------------------------------|-------------------------------|--|
| DETACHED LISTS | MM (UNITS) | DFTO PETERS | DATE 04/4/05 | FULL RISE ELECTRONIC CO., LTD | |
| | TOLERANCES EXCEPT AS NOTED | CHKD JAKE | DATE 08/08/23 | | |
| | MFO | DATE | | | |
| | APPV LUSHENG | DATE 08/08/23 | | | |
| | MATERIAL : | TITLE | | | |
| | ANGLES ± | QTY : | RJ45 SIDE ENTRY LED GANG JACK 6 PORTS | | |
| | THIRD ANGLE PROJECTION | FINISH : | DRAWING NO. GE5J3018-LA | | |
| | | SCALE : 1.5:1 | /PART NO. SEE NOTE | | |
| | | | DO NOT SCALE DRAWING | | |
| | | | SHEET 1 OF 1 | | |

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1